

0.5A High Side Power Switch With Flag**❖ GENERAL DESCRIPTION**

AX8710/AX8720 is a low voltage, single NMOSFET high-side power switch, optimized for self-powered and bus-powered Universal serial bus (USB) application. AX8710/AX8720 equipped with a charge pump circuitry to drive the internal NMOSFET switch, the switch's low $R_{ds(on)}$ 80m Ω , meets USB voltage droop requirement and a flag output is available to indicate fault conditions to the local USB controller.


Additional features include soft-start to limit the inrush current during plug-in, thermal shutdown to prevent catastrophic switch failure from high-current loads, under voltage lockout (UVLO) to ensure that the device remains off unless there is a valid input voltage present. The maximum current is limited to typically 0.9A in dual ports in accordance with the USB power requirement. The low quiescent current as 35uA makes this device ideal for portable battery operated equipment.

AX8710/AX8720 is available in SOT-23-5L, SOP-8L and MSOP-8L packages requiring minimum board space and few peripheral components.

❖ FEATURES


- Wide Input Voltage Range: 2.5V to 5.5V
- Compliant to USB Specifications
- AX8710/AX8720 Enable Active Low/High
- Typical $R_{ds(on)}$
70m Ω (SOT-23-5L)
80m Ω (SOP-8L/MSOP-8L)
- Typical 2.1V under voltage lockout
- Output can be forced higher than input (Off-state)
- Low supply current
Less than 1uA at the off state
35uA at switch on state
- Guaranteed 0.5A continuous load current
- Open Drain Fault Flag Output
- Hot Plug-In Application(Soft start)
- Current Limiting Protection
- Thermal Shutdown Protection
- Reverse Current Flow Blocking (no body diode)

❖ BLOCK DIAGRAM

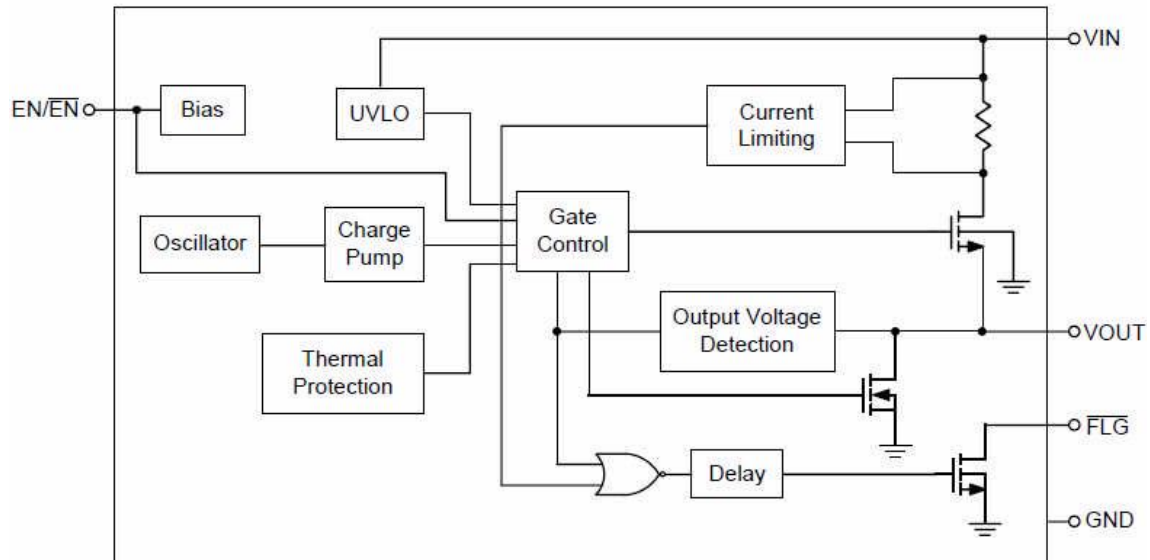

❖ PIN ASSIGNMENT

The pin assignment is given by:

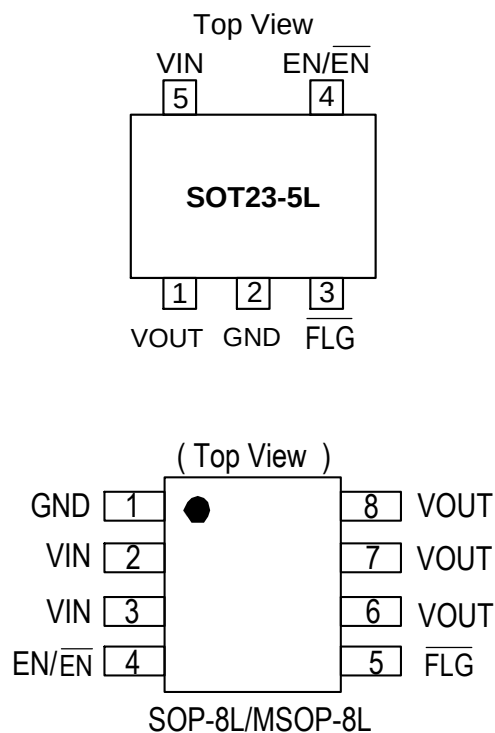

Name	Pin No. SOT23-5L	Pin No. SOP-8 /MSOP-8	Description
VOUT	1	6,7,8	Output Voltage.
GND	2	1	Ground.
FLG	3	5	Fault FLAG Output.
EN/EN	4	4	Chip Enable (Active High/Low).
VIN	5	2,3	Power Input Voltage.

❖ ORDER/MARKING INFORMATION

Order Information AX87XX XX X Enable Active Package Type Packing Enable Low: 10 S: SOP-8L Blank: Tube/Bag Enable High: 20 B: SOT-23-5L A : Taping U8: MSOP-8L	Top Marking (SOT-23-5L) XXYW X → ID code: internal WW: 01~26(A~Z) 27~52(a~z) Year: A= 2010 1= 2011 ⋮ 9= 2019 A1: AX8710 A2: AX8720
Top Marking (SOP-8L/MSOP-8L) Logo ← AX 8 7 1 0 → Part number YYWWX → ID code: internal WW: 01~52 Year: 10=2010 11=2011 ⋮ 19=2019	Top Marking (SOP-8L/MSOP-8L) Logo ← AX 8 7 2 0 → Part number YYWWX → ID code: internal WW: 01~52 Year: 10=2010 11=2011 ⋮ 19=2019

❖ ABSOLUTE MAXIMUM RATINGS (at T_A=25°C)

Characteristics		Symbol	Rating	Unit
Supply Input Voltage		V _{IN}	6.5	V
EN Input Voltages			-0.3 to 6.5	V
FLAG Voltage			6.5	V
Package Power Dissipation		P _D	PD=(T _J -T _A) / θ _{JA}	W
Operating Temperature Range			-40 to 85	°C
Junction Temperature		T _J	-40~125	°C
Storage Temperature Range		T _S	-65 to +150	°C
ESD Rating (Note)	HBM (Human Body Mode)		2	kV
	MM (Machine Mode)		200	V
Thermal Resistance from Junction to ambient	SOP-8L	θ _{JA}	160	°C/W
	SOT-23-5L		250	
	MSOP-8L		160	

Note: Absolute Maximum Ratings are the values beyond which the life of the device may be impaired.

❖ ELECTRICAL CHARACTERISTICS

($V_{IN}=5V$, $C_{IN}=1\mu F$, $C_{OUT}=10\mu F$, $T_A = 25^\circ C$, unless otherwise specified)

Characteristics	Symbol	Conditions	Min	Typ	Max	Units
Input Voltage Range	V_{IN}		2.5	-	5.5	V
Under Voltage Lockout	V_{UVLO}	V_{IN} Increase	1.7	2.1	2.4	V
Under Voltage Hysteresis		V_{IN} Decrease	-	100	-	mV
Input Leakage Current	I_{LEAK}	Disabled, OUT grounded	-	0.1	1	μA
Output Leakage Current		Disabled, $R_{LOAD}=0\Omega$	-	0.5	10	μA
Reverse Leakage Current	I_{REV}	Disabled, $V_{IN}=0V$, $V_{OUT}=5V$, I_{REV} at V_{IN}	-	0.1	1	μA
Switch On Resistor	R_{DSON}	$V_{IN}=5.0V$, $I_{OUT}=1A$, SOT-23-5L $T_A = 25^\circ C$	-	70	100	m Ω
		$-40^\circ C \leq T_A \leq 85^\circ C$	-	-	140	
		$V_{IN}=5.0V$, $I_{OUT}=1A$, SOP-8L/MSOP-8L $T_A = 25^\circ C$	-	80	110	
		$-40^\circ C \leq T_A \leq 85^\circ C$	-	-	140	
Supply Current	I_Q	Switch On, $V_{OUT} = OPEN$	-	35	45	μA
	I_{SHDN}	Switch Off, $V_{OUT} = OPEN$	-	0.1	1	
EN/ $\overline{EN}$ Threshold	V_{IL}	Low Voltage, $V_{IN} = 2.7V$ to $5.5V$	-	-	0.8	V
	V_{IH}	High Voltage, $V_{IN} = 2.7V$ to $5.5V$	2.0	-	-	V
EN/ $\overline{EN}$ Input Current	I_{SINK}	$\overline{VEN} / \overline{EN}$ From $0V$ to $5V$	-	0.01	-	μA
Current Limit	I_{LIMIT}	$V_{IN}=5V$, $V_{OUT}=4.5V$ $-40^\circ C \leq T_A \leq 85^\circ C$	0.6	0.9	1.3	A
Short Circuit Fold-back Current Hysteresis	I_{SHORT}	$V_{OUT}=0V$, Measured prior to the thermal shutdown	-	0.9	-	A
Output Turn-on Rise Time	T_R	$C_L=1\mu F$, $R_{load}=10\Omega$, V_{OUT} Rise From 10% to 90%	1.0	1.5	2.0	ms
		$V_{IN}=5.0V$, $C_L=1F$, $R_{load}=5\Omega$, V_{OUT} Rise From 10% to 90%	-	1.5	-	ms
Output Turn-on Delay Time	$T_{D(ON)}$	$C_L=1\mu F$, $R_{load}=10\Omega$, V_{OUT} Rise From 10% to 90%	-	20	-	us
Output Turn-off Fall Time	T_F	$C_L=1\mu F$, $R_{load}=10\Omega$, V_{OUT} Rise From 10% to 90%	-	20	TBD	us
Output Turn-off Delay Time	$T_{D(OFF)}$	$C_L=1\mu F$, $R_{load}=10\Omega$, V_{OUT} Rise From 10% to 90%	-	10	-	us
FLG Output Resistor	R_{FLG}	$I_{SINK}=1mA$	-	20	40	Ω
FLG Off Current		$\overline{V}_{FLG} = 5V$	-	0.01	1	μA
FLG DELAY TIME	T_{Blank}	From Fault Condition to $\overline{FLG}$ assertion	5	15	20	ms
Output Shutdown Discharge Resistance		Disabled	-	100	150	Ω
Thermal Shutdown Threshold	T_{SD}	Enabled	-	150	-	$^\circ C$
Thermal Shutdown Hysteresis	T_{HYS}	$V_{OUT} = 0V$	-	20	-	$^\circ C$

Note 1: Thermal Resistance is specified with approximately 1 square of 1 oz copper.


Note 2: 100% production test at $+25^\circ C$. Specifications over the temperature range are guaranteed by design and characterization. The device is not guaranteed to function outside its operating conditions.

❖ APPLICATION INFORMATION


The AX8710/AX8720 is a single N-MOSFET high-side power switch with enable input, optimized for self-powered and bus-powered Universal Serial Bus (USB) applications. The AX8710/AX8720 series are equipped with a charge pump circuitry to drive the internal N-MOSFET switch; The switch's low $R_{ds(on)}$, 80mΩ meets USB voltage drop requirements and a flag output is available to indicate fault conditions to the local USB controller.

Input and Output

V_{IN} (Input) is the power source connection to the internal circuitry and the drain of the N-MOSFET. V_{OUT} (Output) is the source of the N-MOSFET. In a typical application, current flows through the switch from V_{IN} to V_{OUT} toward the load. If V_{OUT} is greater than V_{IN} , current will flow from V_{OUT} to V_{IN} since the MOSFET is bidirectional when on. Unlike a normal MOSFET, there is no a parasitic body diode between drain and source of the MOSFET, the AX8710/AX8720 prevents reverse current flow if V_{OUT} being externally forced to a higher voltage than V_{IN} when the output disabled ($V_{EN} < 0.8V$ or $V_{\overline{EN}} > 2V$).

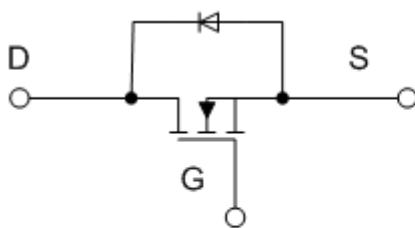

Normal MOSFET

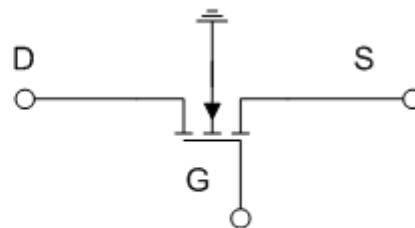

AX8710

Enable

The switch will be disabled when the EN pin is low or $\overline{EN}$ is high. During this condition, the internal circuitry and MOSFET are all turned off and the supply current reduces to 0.1uA typically. Floating the $\overline{EN}/EN$ may cause unpredictable operation. EN should not be allowed to be negative to GND. The $\overline{EN}/EN$ pin may be directly tied to V_{IN} (GND) to keep the part on.

UVLO

Under-Voltage Lockout (UVLO) prevents the power MOSFET from turning on until the input voltage is up to approximately 2.1V. If the input voltage drops below about 2.0V, UVLO turns off the power MOSFET switch and $\overline{FLG}$ will be asserted accordingly. Under voltage protection is function when the part is enabled.

Soft Start for Hot Plug Application

In order to eliminate the upstream voltage droop caused by the large inrush current during the hot plug events, the soft start feature effectively isolates the power source from extremely large load capacitor, satisfying the USB voltage droop requirement.

Fault Flag

The AX8710/AX8720 series provides a $\overline{\text{FLG}}$ signal pin which is an N-Channel open drain MOSFET output. This open drain output goes low when $V_{\text{OUT}} < V_{\text{IN}} - 1\text{V}$, current limit or the die temperature exceeds 150°C approximately. The $\overline{\text{FLG}}$ output is typically about 200mV when sinking a 10mA load. A 100K pull up resistor is required at the $\overline{\text{FLG}}$ pin. $\overline{\text{FLG}}$ Pin will be asserted at the over-current condition after the flag response delay time T_{D} . This ensures that $\overline{\text{FLG}}$ is asserted only at the valid over-current conditions and error reporting is eliminated.

Current Limiting and Short-Circuit Protection

The current limit circuitry prevents damage to the MOSFET switch and the hub downstream port but can deliver load current up to the current limit threshold of typically 2.5A through the switch of AX8710/AX8720. When a heavy load or short circuit is applied to an enabled switch, a large transient current may flow until the current limit circuitry responds. Once this current limit threshold is exceeded the device enters constant current mode until the thermal shutdown occurs or the fault is removed.

Thermal Shutdown

Thermal shutdown is employed to protect the device from damage if the die temperature exceeds approximately 150°C . If enabled, the switch automatically restarts when the die temperature falls 20°C . The output and $\overline{\text{FLG}}$ signal will continue to cycle on and off until the device is disabled or the fault is removed.

Input capacitor

A 1uF low ESR ceramic capacitor from V_{IN} to GND, located at the device is strongly recommended to prevent the input voltage drooping during hot-plug events. However, higher capacitor values will further reduce the voltage droop at the input. Furthermore, without the bypass capacitor, an output short may cause sufficient ringing on the input (from source lead inductance) to destroy the internal control circuitry. The input transient must not exceed 6.5V of the absolute maximum supply voltage even for a short duration.

Output capacitor


A low ESR 150uF aluminum electrolytic or tantalum between V_{OUT} and GND is strongly recommended to meet the 330mV maximum droop requirement in the hub VBUS (Per USB 2.0, output ports must have a minimum 120uF of low ESR bulk capacitor per hub). Standard bypass methods should be used to minimize inductance and resistance between the bypass capacitor and the downstream connector to reduce EMI and decouple voltage droop caused when downstream cables are hot insertion transients. Ferrite beads in series with VBUS, the ground line and the 0.1uF bypass capacitors at the power connector pins are recommended for EMI and ESD protection. The bypass capacitor itself should have a low dissipation factor to allow decoupling at higher frequencies.

PCB Layout Guide

For best performance of the AX8710/AX8720 series, the following guidelines must be strictly followed:


1. Input and output capacitors should be placed close to the IC and connected to ground plane to reduce noise coupling.
2. The GND should be connected to a strong ground plane for heat sink.
3. Keep the main current traces as possible as short and wide.

❖ APPLICATION CIRCUIT

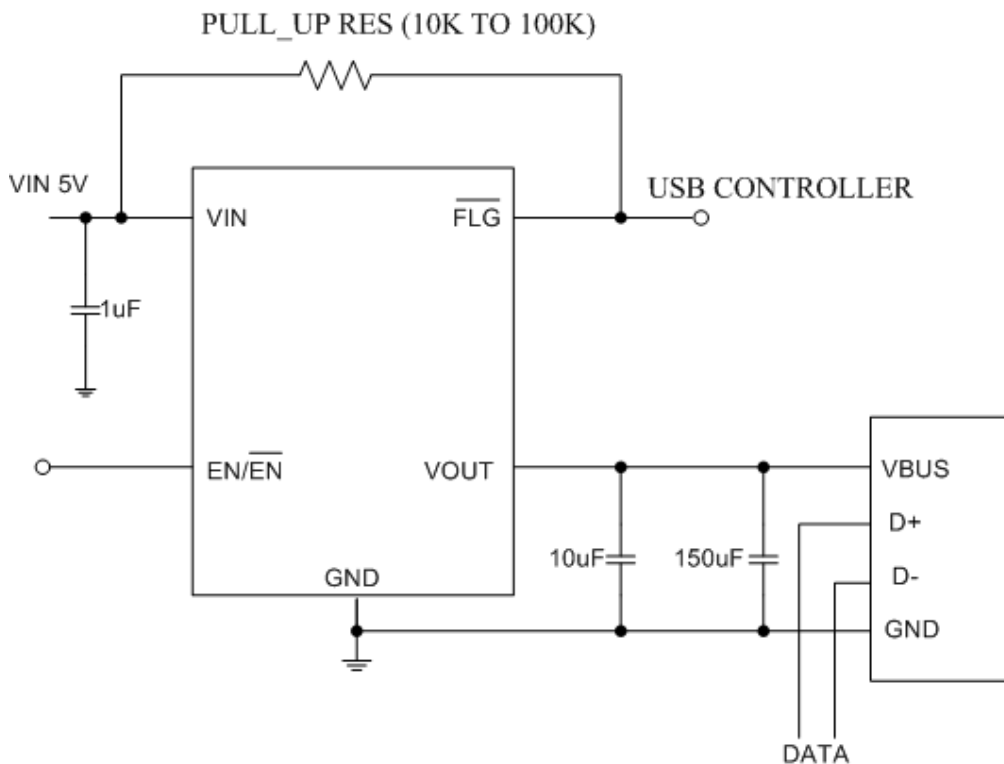

❖ PACKAGE OUTLINES

(1) SOP-8L

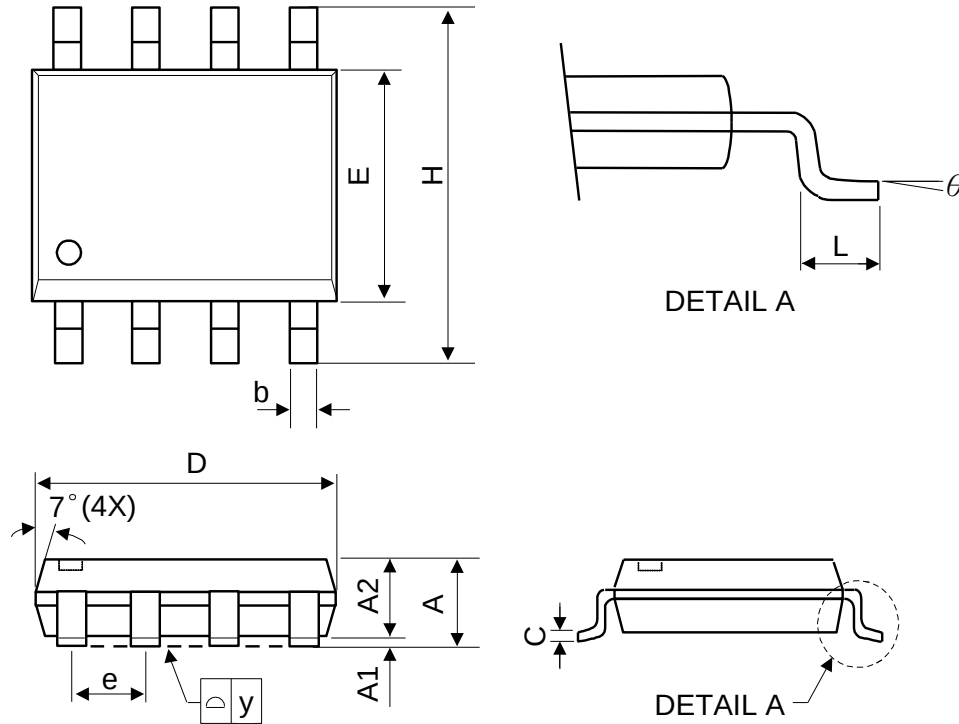


Symbol	Dimensions in Millimeters			Dimensions in Inches		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	-	-	1.75	-	-	0.069
A1	0.1	-	0.25	0.04	-	0.1
A2	1.25	-	-	0.049	-	-
C	0.1	0.2	0.25	0.0075	0.008	0.01
D	4.7	4.9	5.1	0.185	0.193	0.2
E	3.7	3.9	4.1	0.146	0.154	0.161
H	5.8	6	6.2	0.228	0.236	0.244
L	0.4	-	1.27	0.015	-	0.05
b	0.31	0.41	0.51	0.012	0.016	0.02
e	1.27 BSC			0.050 BSC		
y	-	-	0.1	-	-	0.004
θ	0°	-	8°	0°	-	8°

Mold flash shall not exceed 0.25mm per side

JEDEC outline: MS-012 AA


(2) MSOP-8L

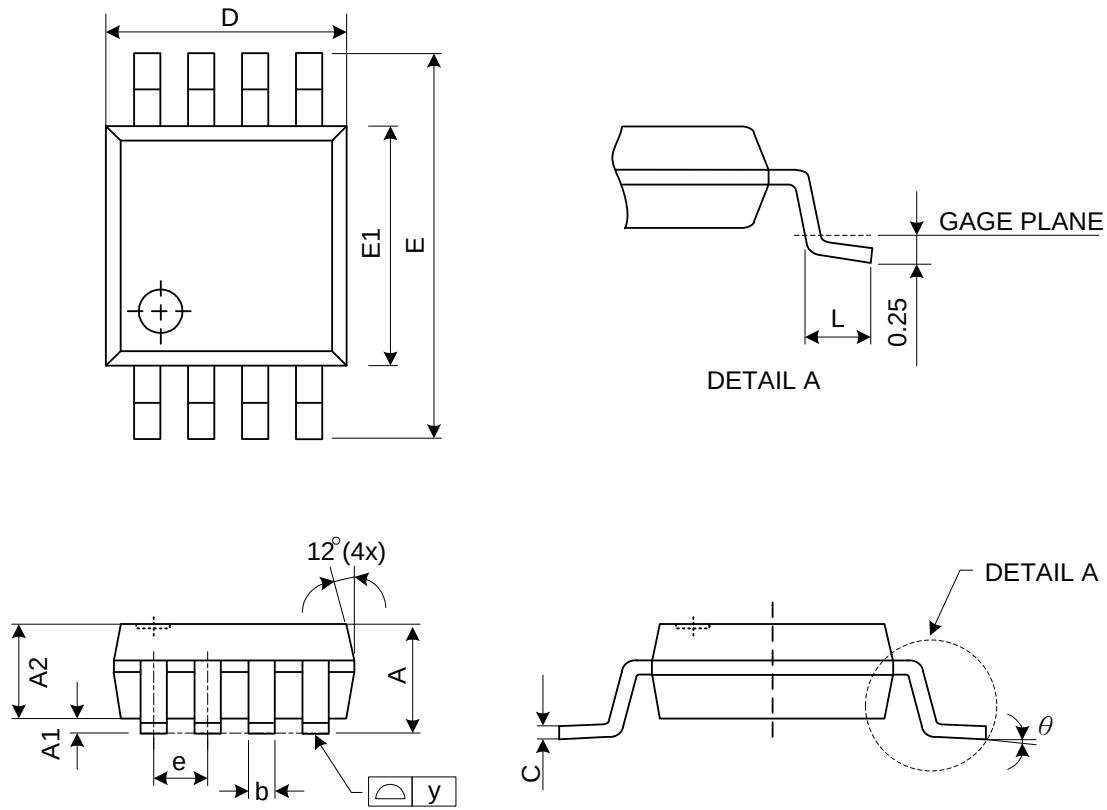

Symbol	Dimensions in Millimeters			Dimensions in Inches		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	-	-	1.10	-	-	0.043
A1	0.00	0.08	0.15	0.000	0.003	0.006
A2	0.75	0.85	0.95	0.030	0.033	0.037
b	0.22	0.30	0.38	0.009	0.012	0.015
C	0.08	0.15	0.23	0.003	0.006	0.009
D	2.90	3.00	3.10	0.114	0.118	0.122
E	4.80	4.90	5.00	0.189	0.193	0.197
E1	2.90	3.00	3.10	0.114	0.118	0.122
e	0.65 BSC			0.026 BSC		
L	0.40	0.60	0.80	0.016	0.024	0.031
y	-	-	0.1	-	-	0.004
θ	0°	4°	8°	0°	4°	8°

JEDEC outline: MO-187 AA

(3) SOT-23-5L

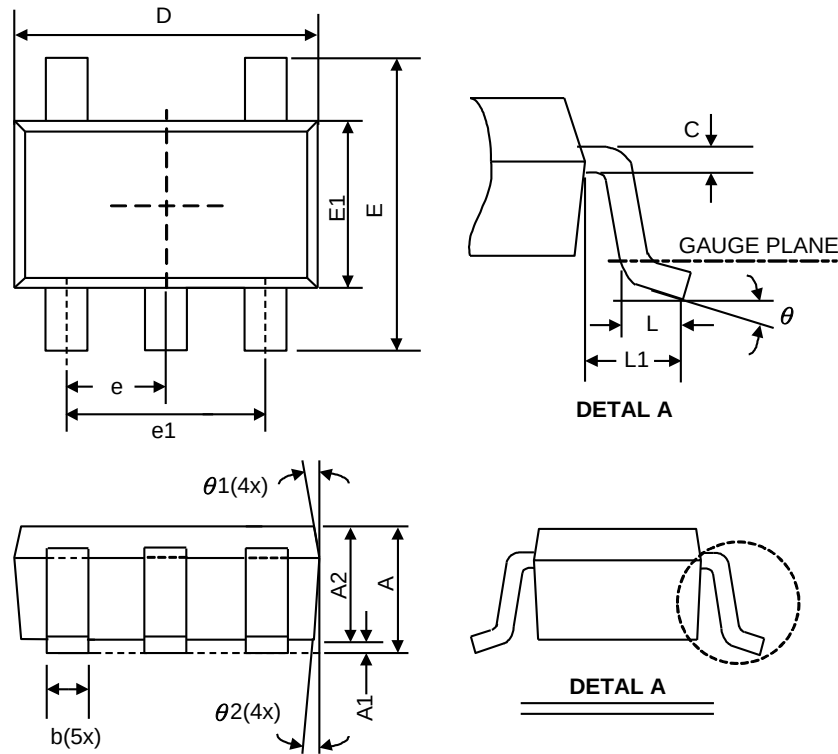

Symbol	Dimensions in Millimeters			Dimensions in Inches		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	-	-	1.45	-	-	0.057
A1	0.00	0.08	0.15	0	0.003	0.006
A2	0.90	1.10	1.30	0.035	0.043	0.051
b	0.30	0.40	0.50	0.012	0.016	0.020
C	0.08	0.15	0.22	0.003	0.006	0.009
D	2.70	2.90	3.10	0.106	0.114	0.122
E1	1.40	1.60	1.80	0.055	0.063	0.071
E	2.60	2.80	3.00	0.102	0.110	0.118
L	0.30	0.45	0.60	0.012	0.018	0.024
L1	0.50	0.60	0.70	0.020	0.024	0.028
e1	1.9 BSC			0.075 BSC		
e	0.95 BSC			0.037 BSC		
theta	0°	4°	8°	0°	4°	8°
theta 1	5°	10°	15°	5°	10°	15°
theta 2	5°	10°	15°	5°	10°	15°

JEDEC outline: MO-178 AA