


Temperature Compensated Crystal Oscillator

(TCXO / VC-TCXO)

www.DataSheet4U.com

High stability



AXLE7050 , AXLE7050V

■ Features

- 10 to 26 MHz
- Low power consumption
- Supply voltage available between 2.7 to 5.0V
- Package : Metal lid + Ceramic base
- 7.0 × 5.0 × 1.9mm


■ Electrical Performance

Description	Symbols	AXLE7050	AXLE7050V
Available Frequency Range	F0	10.000 ~ 26.000 MHz	
Frequency Stability vs. Operating Temperature (25°C ref.)	dFt/F	± 1.5ppm, ± 2.0ppm, ± 2.5ppm (-30 to +75°C) ± 2.5ppm, ± 3.0ppm (-40 to +85°C)	
Storage Temperature	Tsto	-40 to +85°C	
Supply Voltage	Vcc	+2.7 to 5.0V	
Supply Current	Icc	2.0 mA max	
Supply Voltage Change	dFv	± 0.2 ppm / Vcc ± 5%	
Output Voltage	Vo	0.8Vp-p (Clipped sine wave)	
Load	Zcr	10 KΩ // 10pF	
Load Change	dFz	± 0.2 ppm (10KΩ ± 10% // 10pF ± 10%)	
Voltage Control	dF/V	-	± 8ppm, ± 10ppm, ± 15ppm / +1.5 ± 1.0V
Phase Noise	PN	-135dBc / Hz typ.(1.0KHz)	


■ Environmental Characteristics

Description	Symbols	Specification
Aging (First Year)		± 1.0 ppm max/year
Shock		Test: 3 times free drop onto concrete board from 150cm height Result: ± 1.0 ppm max
Vibration		Test: Frequency 5-500Hz, Amplitude 1.5mm, Test time 4cycles/XYZ axis Result: ± 1.0 ppm max
Solderability		Test: More than 95%, at 235 ± 5°C for 3 sec
Humidity		Test: 90 to 95% relative humidity at +60 ± 3°C for 1000 hours Result: ± 1.0 ppm max

■ Outline Drawing & Suggested Pad

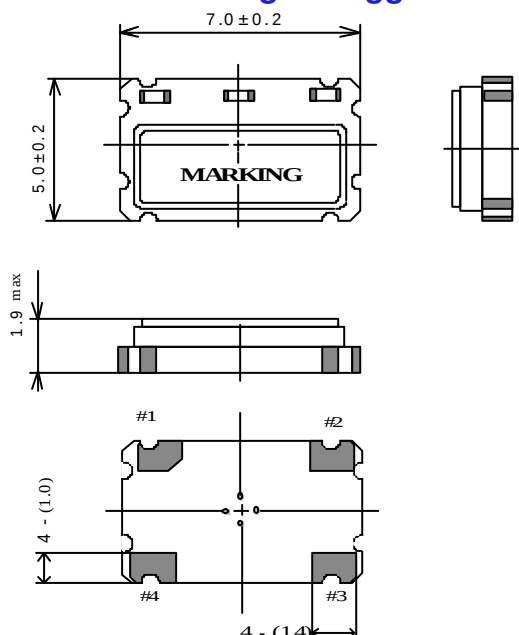

TERMINAL	CONNECTION	
	TCXO	VCTCXO
#1	GND	Vcont
#2	GND	GND
#3	OUTPUT	OUTPUT
#4	Vcc	Vcc



■ Suggested Pad (Top View)

AXTAL GmbH & Co. KG
Wasenweg 5
D-74821 Mosbach

www.axtal.com
info@axtal.com
fon: +49 6261 939834
fax: +49 6261 939866
www.DataSheet4U.com