


B5-433-B525

DESCRIPTION

- Super bright LED Lamp
- Round type
- T1-3/4 (5mm) diameter
- Lens color: Water Clear
- With Flange
- Solder leads without stand-off

FEATURES

- Emitted color: Super Green
- High Luminous intensity
- Technology: InGaN
- Peak wavelength $\lambda_p = 528 \text{ nm}$
- Viewing angle: 15°

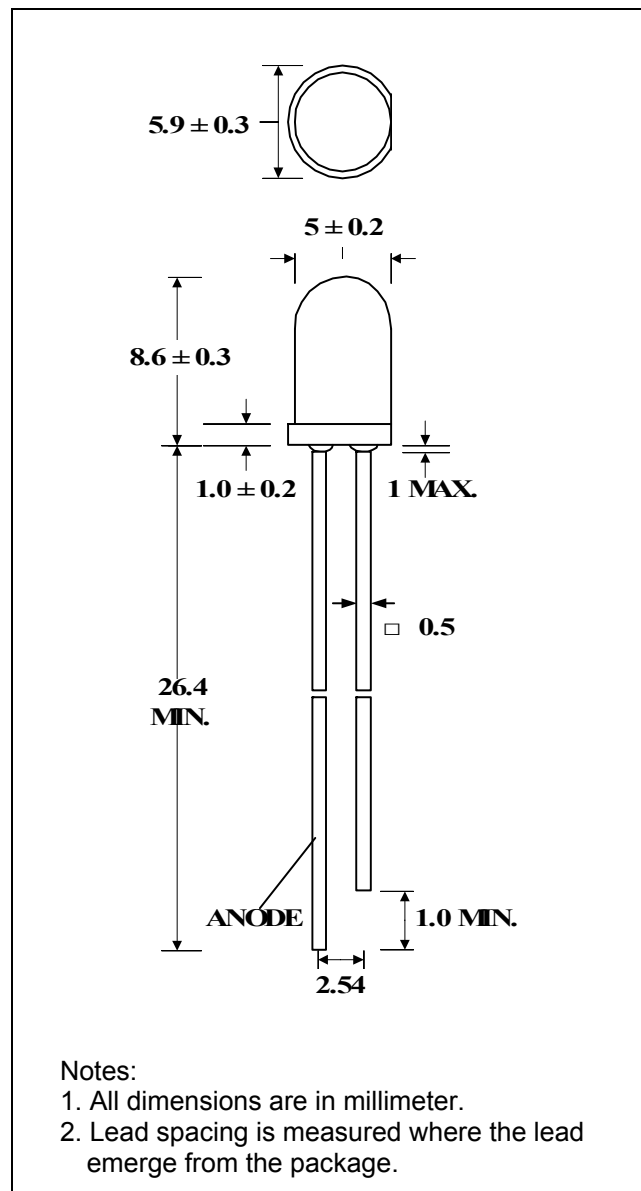

SELECTION GUIDE

Chip Material	Chip Emitted	Lens Color	Viewing Angle
InGaN	Super Green	Water Clear	15°

B5-433-B525**ABSOLUTE MAXIMUM RATINGS**

(Ta=25 °C)

PARAMETER	SYMBOL	MAX. RATING	Unit
Power Dissipation	P_D	120	mW
Peak Forward Current (1/10 Duty Cycle @1KHz)	I_{PF}	100	mA
Continuous Forward Current	I_{AF}	30	mA
Reverse Voltage	V_R	5.0	V
Operating Temperature Range	T_{OPR}	-20~+80	°C
Storage Temperature Range	T_{STG}	-30~+100	°C

Solder temperature 1.6 mm from body for 3 seconds at 260 °C


OPTICAL-ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Luminous Intensity	I_V	$I_F = 20\text{mA}$	6600	10000		mcd
Forward Voltage	V_F	$I_F = 20\text{mA}$		3.5	4.0	V
Reverse Current	I_R	$V_R = 5\text{V}$			10	uA
Viewing Angle	2θ1/2	$I_F = 20\text{mA}$		15		deg.
Peak Wavelength	λ_P	$I_F = 20\text{mA}$		528		nm
Dominant Wavelength	λ_D	$I_F = 20\text{mA}$		525		nm
Spectrum Radiation Bandwidth	$\Delta\lambda$	$I_F = 20\text{mA}$		30		nm


*Tolerance of Viewing Angle: -10 / +5 deg.

B5-433-B525


TYPICAL OPTICAL-ELECTRICAL CHARACTERISTIC CURVES

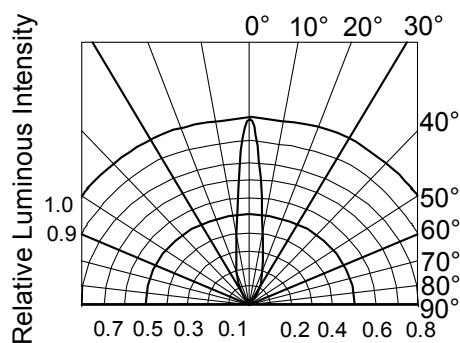


RADIATION DIAGRAM

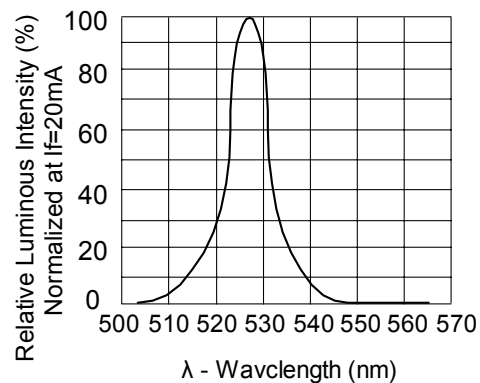


**RELATIVE LUMINOUS INTENSITY
Vs. WAVELENGTH**

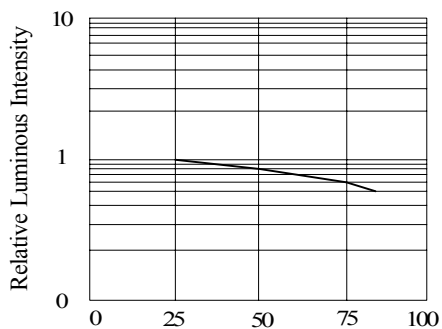


**LUMINOUS INTENSITY
Vs. AMBIENT TEMPERATURE**

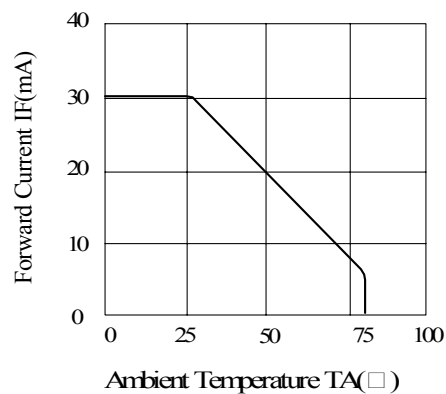

**FORWARD CURRENT
Vs. AMBIENT TEMPERATURE**

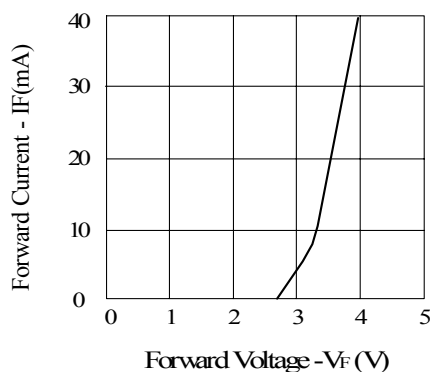

**FORWARD CURRENT
Vs. FORWARD VOLTAGE**

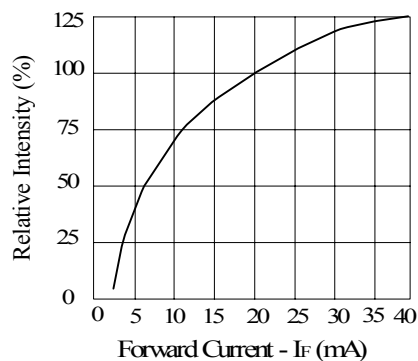

**LUMINOUS INTENSITY
Vs. FORWARD CURRENT**

www.DataSheet4U.com