


Features


- Single and Dual Diode
- Low Forward Voltage
- PN Junction Guard Ring for Transient and ESD Protection
- For General Purpose Switching Applications
- Plastic Material – UL Recognition Flammability Classification 94V-0

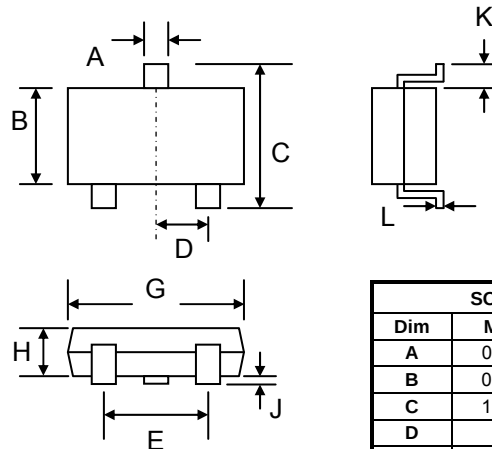


SOT-523		
Dim	Min	Max
A	0.15	0.30
B	0.75	0.85
C	1.45	1.75
D	0.50 Typical	
E	0.90	1.10
G	1.50	1.70
H	0.60	0.80
J	0.02	0.10
K	0.10	0.30
L	0.10	0.20
All Dimensions in mm		

Mechanical Data


- Case: SOT-523, Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: See Diagrams Below
- Weight: 0.002 grams (approx.)
- Marking: Device Code, See Page 3
- Mounting Position: Any
- **Lead Free: For RoHS / Lead Free Version, Add “-LF” Suffix to Part Number, See Page 4**




TOP VIEW
BAS40T



TOP VIEW
BAS40AT



TOP VIEW
BAS40CT



TOP VIEW
BAS40ST

Maximum Ratings @T_A=25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	40	V
Forward Continuous Current	I _F	200	mA
Non-Repetitive Peak Forward Surge Current @ t < 1.0s	I _{FSM}	600	mA
Operating Temperature Range	T _J	-55 to +125	°C
Storage Temperature Range	T _{STG}	-65 to +150	°C





Thermal Characteristics

Characteristic	Symbol	Value	Unit
Power Dissipation (Note 1)	P _D	150	mW
Thermal Resistance, Junction to Ambient (Note 1)	R _{θJA}	833	°C/W


Note: 1. Mounted on FR-4 PC board with minimum recommended pad layout.

Electrical Characteristics @T_A=25°C unless otherwise specified

Characteristic	Symbol	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage @ I _R = 10μA	V _(BR)	40			V
Forward Voltage Drop @ I _F = 1.0mA @ I _F = 40mA	V _F			0.38 1.00	V
Reverse Leakage Current @ V _R = 30V	I _R		20	200	nA
Diode Capacitance (V _R = 0V, f = 1.0MHz)	C _D		4.0	5.0	pF
Reverse Recovery Time (I _F = I _R = 10mA, I _{RR} = 0.1 x I _R , R _L = 100Ω)	t _{rr}			5.0	nS

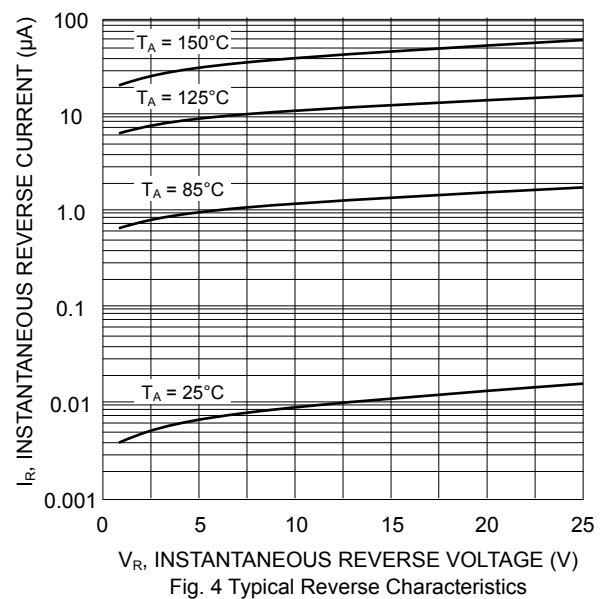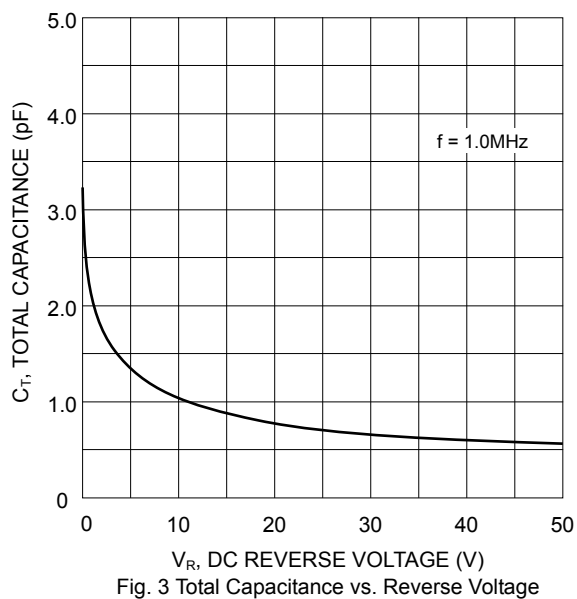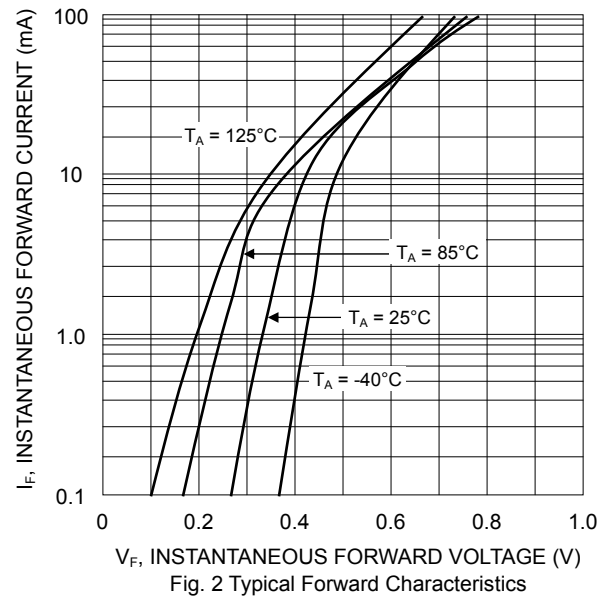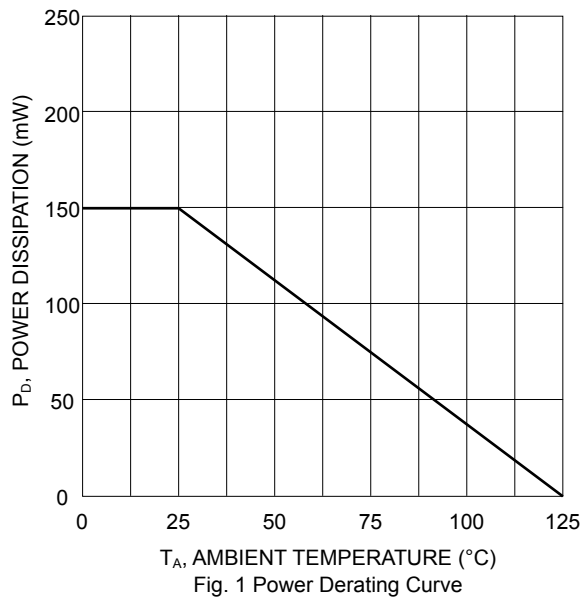


MARKING INFORMATION



xx = Device Code, See Table Below

BAS40T	BAS40AT	BAS40CT	BAS40ST
43	46	45	44

RECOMMENDED FOOTPRINT

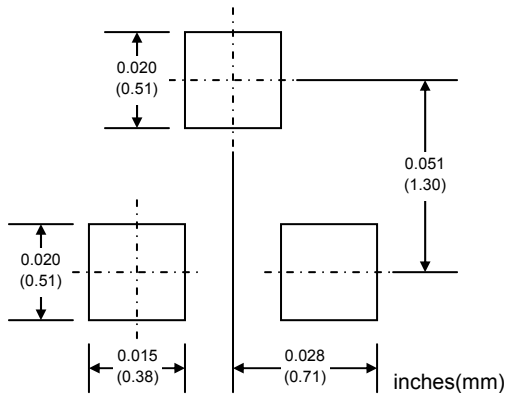


Dimensions in inches(mm):

- Pad width: 0.020 (0.51)
- Pad height: 0.020 (0.51)
- Pad spacing: 0.015 (0.38)
- Pad pitch: 0.028 (0.71)
- Pad offset: 0.051 (1.30)

PACKAGING INFORMATION

TAPE & REEL

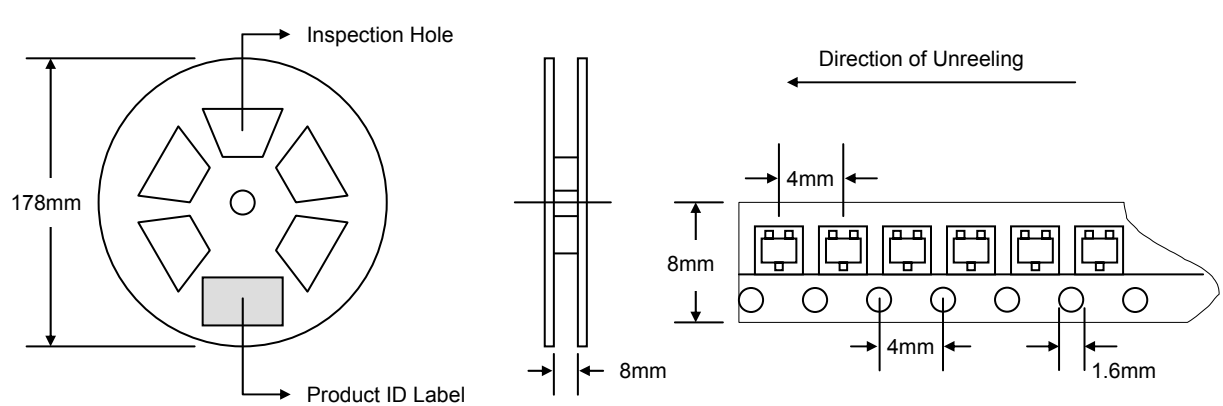

Reel Diameter: 178mm

Inspection Hole

Product ID Label

Direction of Unreeling

Dimensions: 4mm, 8mm, 1.6mm

Reel Diameter (mm)	Quantity (PCS)	Inner Box Size L x W x H (mm)	Quantity (PCS)	Carton Size L x W x H (mm)	Quantity (PCS)	Approx. Gross Weight (KG)
178	3,000	187 x 187 x 65	15,000	390 x 240 x 420	150,000	8.0

Note:

1. Anti-static plastic reel, white, water clear or blue color. Inspection hole might be varied in different alignment.
2. Components are packed in accordance with EIA standard 481-1 and 481-2.

ORDERING INFORMATION

Product No.	Package Type	Shipping Quantity
BAS40T-T1	SOT-523	3000/Tape & Reel
BAS40AT-T1	SOT-523	3000/Tape & Reel
BAS40CT-T1	SOT-523	3000/Tape & Reel
BAS40ST-T1	SOT-523	3000/Tape & Reel

1. Shipping quantity given is for minimum packing quantity only. For minimum order quantity, please consult the Sales Department.
2. **To order RoHS / Lead Free version (with Lead Free finish), add "-LF" suffix to part number above. For example, BAS40T-T1-LF.**

WON-TOP ELECTRONICS and  are registered trademarks of Won-Top Electronics Co., Ltd (WTE). WTE has checked all information carefully and believes it to be correct and accurate. However, WTE cannot assume any responsibility for inaccuracies. Furthermore, this information does not give the purchaser of semiconductor devices any license under patent rights to manufacturer. WTE reserves the right to change any or all information herein without further notice.

WARNING: DO NOT USE IN LIFE SUPPORT EQUIPMENT. WTE power semiconductor products are not authorized for use as critical components in life support devices or systems without the express written approval.

Won-Top Electronics Co., Ltd.
No. 44 Yu Kang North 3rd Road,
Chine Chen Dist., Kaohsiung 806, Taiwan
Phone: 886-7-822-5408 or 886-7-822-5410
Fax: 886-7-822-5417
Email: sales@wontop.com
Internet: http://www.wontop.com

We power your everyday.