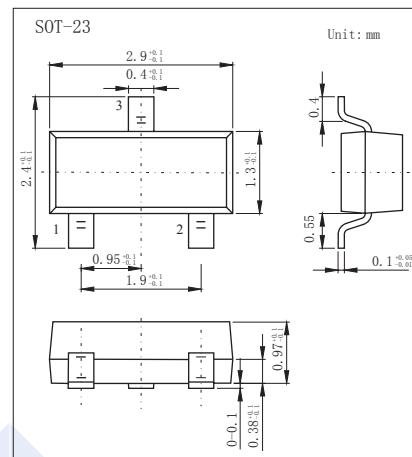
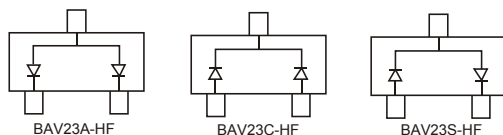


Switching Diodes

BAV23A/C/S-HF (KAV23A/C/S-HF)

■ Features

- Fast Switching Speed
- For General Purpose Switching Applications.
- High Conductance
- Pb-Free Package May be Available. The G-Suffix Denotes a Pb-Free Lead Finish

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Reverse Voltage	VRRM	250	V
Working Peak Reverse Voltage	VRWM	200	
DC Blocking Voltage	VR	200	
RMS Reverse Voltage	VR(RMS)	141	
Forward Continuous Current	IFM	400	mA
Non-Repetitive Peak Forward Surge Current t=1us t=100us t=10ms	IFSM	9	A
		3	
		1.7	
Repetitive Peak Forward Surge Current	IFRM	625	mA
Power Dissipation	Pd	350	mW
Thermal Resistance Junction to Ambient	RθJA	357	°C/W
Junction Temperature	TJ	150	°C
Storage Temperature range	Tstg	-65 to 150	

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse breakdown voltage	V_R	$I_R = 100 \mu A$	250			V
Forward voltage	V_F	$I_F = 100 \text{ mA}$			1	
		$I_F = 200 \text{ mA}$			1.25	
Reverse voltage leakage current	I_R	$V_R = 200 \text{ V}, T_J = 25^\circ\text{C}$			100	nA
		$V_R = 200 \text{ V}, T_J = 150^\circ\text{C}$			100	μA
Junction capacitance	C_j	$V_R = 0 \text{ V}, f = 1 \text{ MHz}$			5	pF
Reverse recovery time	t_{rr}	$I_F = I_R = 30 \text{ mA}, I_{rr} = 0.1 \times I_R, R_L = 100 \Omega$			50	ns

■ Marking

NO.	BAV23A-HF	BAV23C-HF	BAV23S-HF
Marking	KT7 _F	KT6 _F	KL31 _F

Switching Diodes

BAV23A/C/S-HF (KAV23A/C/S-HF)

■ Typical Characteristics

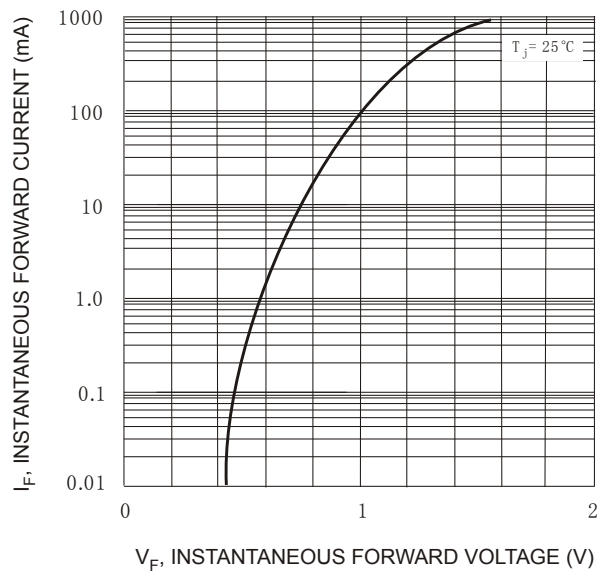


Fig. 1 Forward Characteristics

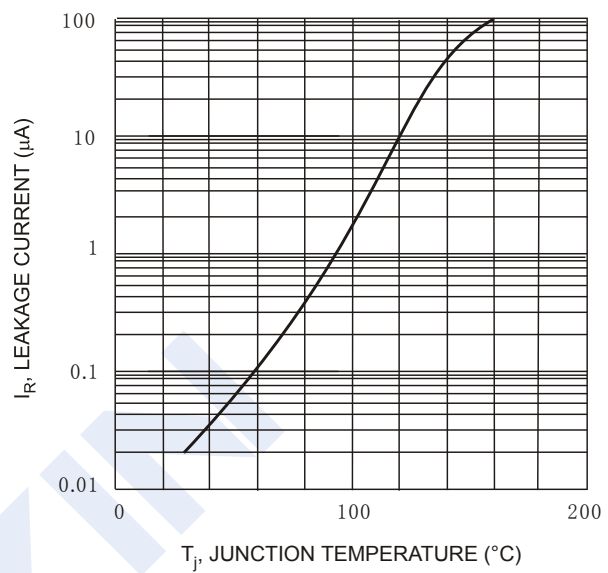


Fig. 2 Leakage Current vs. Junction Temperature