



LCD MODULE SPECIFICATION

MODEL NO.

BC2002AFNLEH\$



FOR MESSRS:

ON DATE OF:

APPROVED BY:



C O N T E N T S

1. Numbering System
2. Precautions in use of LCD Modules
3. General Specification
4. Absolute Maximum Rating
5. Electrical Characteristics
6. Optical Characteristics
7. Interface Pin Function
8. Power supply for LCD Module and LCD operating voltage adjustment
9. Backlight information
10. Quality Assurance
11. Reliability
12. Appendix (Drawing , ST7066U controller data)



1. Numbering System

<u>B</u>	<u>C</u>	<u>2004</u>	<u>A</u>	<u>F</u>	<u>N</u>	<u>L</u>	<u>E</u>	<u>H</u>	<u>\$</u>
0	1	2	3	4	5	6	7	8	9

0	Brand								
1	Module Type				C= character type G= graphic type P= TAB/TCP type		O= COG type F= COF type		
2	Format				2002=20 characters, 4 lines 12232= 122 x 32 dots				
3	Version No.				A type				
4	LCD Color				G=STN/gray Y=STN/yellow-green C=color STN		B=STN/blue F=FSTN T=TN		
5	LCD Type				R=positive/reflective P=positive/transflective		M=positive/transmissive N=negative/transmissive		
6	Backlight type/color				L=LED array/ yellow-green H=LED edge/white R=LED array/red G=LED edge/yellow-green		D=LED edge/blue E=EL/white B=EL/blue C=CCFL/white		
7	CGRAM Font				J=English/Japanese Font E=English/European Font		C=English/Cyrillic Font H=English/Hebrew Font		
8	View Angle/ Operating Temperature				B=Bottom/Normal Temperature H=Bottom/Wide Temperature U=Bottom/Ultra wide Temperature		T=Top/Normal Temperature W=Top/Wide Temperature C=9H/Normal Temperature		
9	Special Code				3=3 volt logic power supply n=negative voltage for LCD c=cable/connector xxx=to be assigned on data sheet		t=temperature compensation for LCD p=touch panel		



2. Precaution in use of LCD Module

- (1) Avoid applying excessive shocks to the module or making any alterations or modifications to it.
- (2) Don't make extra holes on the printed circuit board, modify its shape or change the components of LCD module.
- (3) Don't disassemble the LCM.
- (4) Don't operate it above the absolute maximum rating.
- (5) Don't drop, bend or twist LCM.
- (6) Soldering: only to the I/O terminals.
- (7) Storage: please storage in anti-static electricity container and clean environment.
- (8) Don't touch the elastmer connector, especially insert a backlight panel (EL or CCFL)

3. General Specification

(1) Mechanical Dimension

Item	Dimension	Unit
Number of Characters	20 charactersx2 Lines	—
Module dimension (L x W x H)	116.0 x 37.0 x 13.9 (Max) – LED array B/L,	mm
View area	85.0 x 18.6	mm
Active area	73.5 x 11.5	mm
Dot size	0.60 x 0.65	mm
Dot pitch	0.65 x 0.70	mm
Character size (L x W)	5.55 x 3.2	mm
Character pitch (L x W)	5.95 x 3.7	mm

(2) Controller IC: **ST7066U (or Equivalent) controller**

(3) Temperature Range

	Wide
Operating	-20 ~+70°C
Storage	-30 ~+80°C



4. Absolute Maximum Ratings

4.1 Electrical Absolute Maximum Ratings

(V_{ss}=0V, T_a=25°C)

Item	Symbol	Min	Max	Unit
Supply Voltage (Logic)	V _{dd} -V _{ss}	-0.3	7	V
Supply Voltage (LCD driver)	V _{dd} -V _o	-0.3	13	V
Input Voltage	V _I	V _{ss}	V _{dd}	V
Wide Temperature Type	Top	-20	+70	°C
	Tstg	-30	+80	°C

4.2 Environmental Absolute Maximum Ratings

Item	Operating		Storage		Comment
	(Min.)	(Max.)	(Min.)	(Max.)	
Humidity	Note(2)		Note(2)		Without condensation
Vibration	--	4.9M/S ²	--	19.6M/S ²	XYZ Direction
Shock	--	29.4M/S ²	--	490M/S ²	XYZ Direction

Note (1) T_a = 0°C : 50Hr Max.

Note (2) T_a ≤ 40°C : 90% RH MAX

T_a > 40°C : Absolute humidity must be lower than the humidity of 90% at 40°C



5. Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage For Logic	Vdd-Vss	—	4.5	—	5.5	V
Supply Voltage For LCD * Wide Temp 、 Type	Vdd-Vo	* Ta=-20℃	—	5.3	—	V
		Ta=0℃	—	—	—	V
		Ta=25℃	—	4.3	—	V
		Ta=50℃	—	—	—	V
		* Ta=+70℃	—	3.8	—	V
Input High Volt.	V _{IH}	—	0.7* Vdd	—	Vdd	V
Input Low Volt.	V _{IL}	—	-0.3	—	0.6	V
Output High Volt.	V _{OH}	—	3.9	—	Vdd	V
Output Low Volt.	V _{OL}	—	—	—	0.4	V
Supply Current	I _{dd}	Vdd=5V	—	1.6	—	mA




6. Optical Characteristics

a. FSTN


Item	Symbol	Condition	Min.	Typ.	Max.	Unit
View Angle	(V) θ	$CR \geq 3$	10		60	deg
	(H) φ	$CR \geq 3$	-45		45	deg
Contrast Ratio	CR	—		5		—
Response Time 25°C	T rise	—		100	150	ms
	T fall	—		150	200	ms

6.1 Definitions


■ View Angles

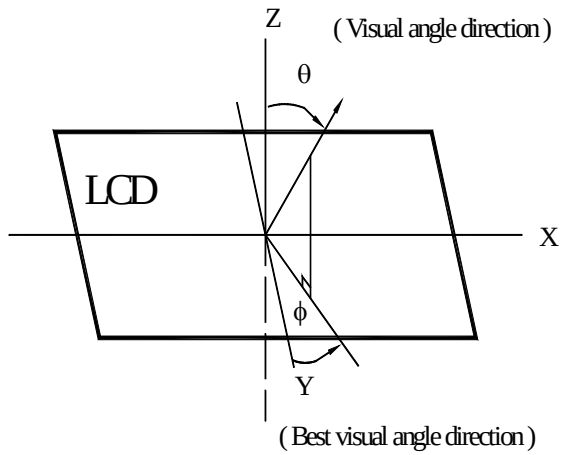

■ Contrast Ratio

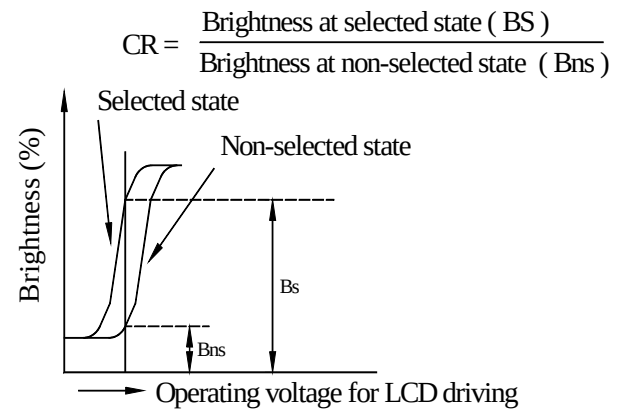

■ Response Time

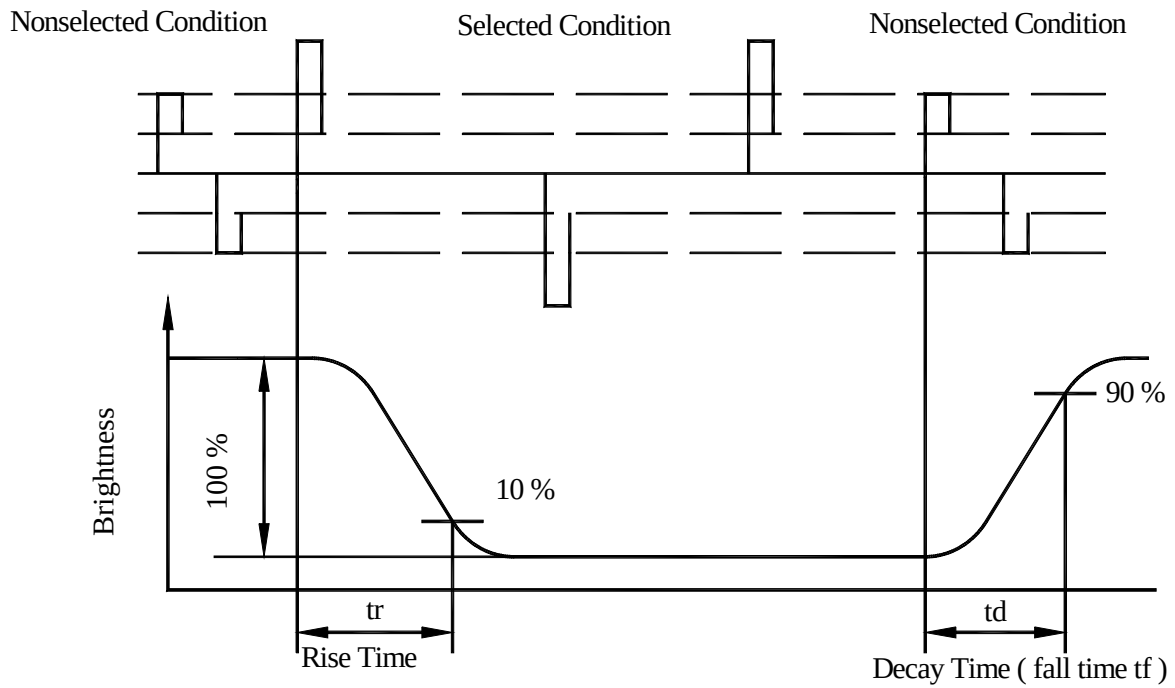


7. Interface Pin Function



Pin No.	Symbol	Level	Description
1	Vss	0V	Ground
2	Vdd	5.0V	Supply Voltage for logic
3	Vo	(Variable)	Operating voltage for LCD
4	RS	H/L	H:DATA, L:Instruction code
5	R/W	H/L	H:Read(MPU→Module)L:Write(MPU→Module)
6	E	H,H→L	Chip enable signal
7	DB0	H/L	Data bit 0
8	DB1	H/L	Data bit 1
9	DB2	H/L	Data bit 2
10	DB3	H/L	Data bit 3
11	DB4	H/L	Data bit 4
12	DB5	H/L	Data bit 5
13	DB6	H/L	Data bit 6
14	DB7	H/L	Data bit 7
15	A	—	Power supply for LED backlight (+)
16	K	—	Power supply for LED backlight (GND)

8.Power Supply for LCD Module and LCD Operating Voltage a Adjustment

* Standard Type

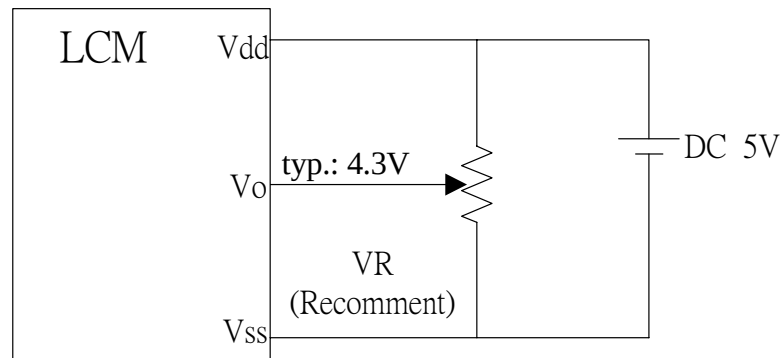

9.Backlight Information

9.1 Specification




(1) LED array/ yellow-green

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Supply Current	I _{LED}	110	210	315	mA	V=4.0V
Supply Voltage	V	3.9	4.0	4.2	V	
Reverse Voltage	V _R	—	—	8	V	
Luminous Intensity	I _V	—	—	—	cd/m ²	I _{LED} =210mA
Wave Length	λ _p		574		nm	I _{LED} =210mA
Life Time		—	50000	—	Hr.	V ≤ 4.0V
Color	Yellow Green					

9.2 Backlight driving methods

a. LED B/L drive from pin15 (LED+) pin16 (LED-)

a.1 array / yellow-green

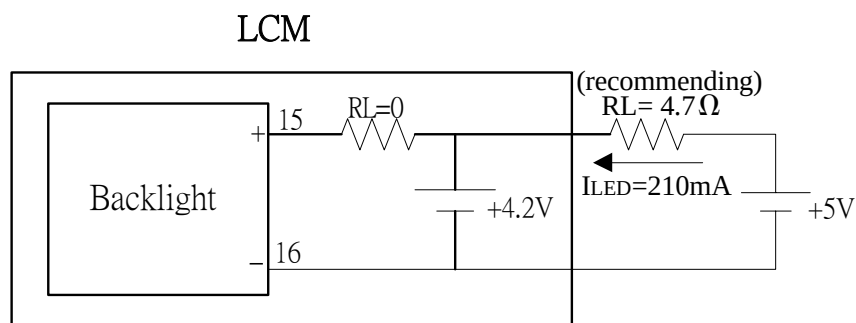


10. Quality Assurance


10.1 Inspection conditions



The LCD shall be inspected under 40W white fluorescent light.

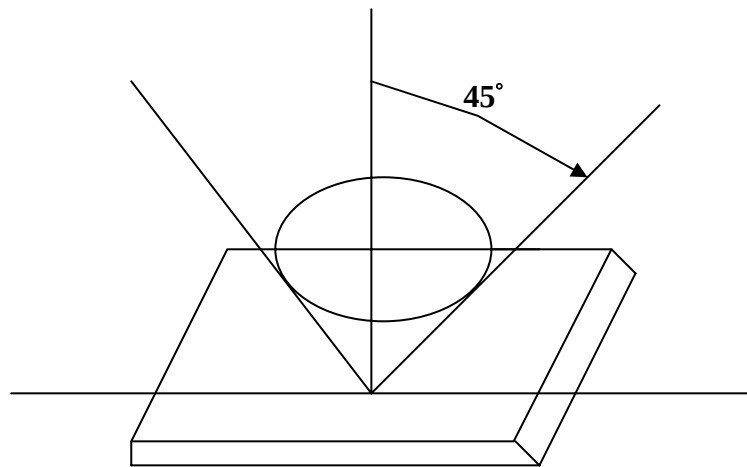

Definition of applicable Zones

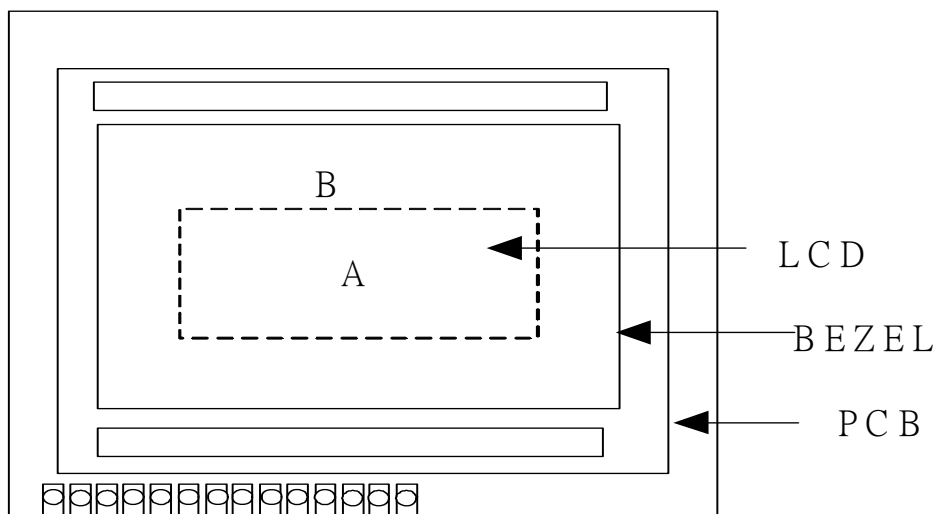

A : Display Area





B : Non-Display Area



10.2 Inspection Parameters

NO.	Parameter	Criteria					
1	Black or White spots	Zone Dimension		Acceptable Number		Class Of Defects	Acceptable Level
				A	B		
		D<0.15		*	*	Minor	2.5
		0.15≤D≤0.2		4	4		
		0.2≤D≤0.25		2	2		
		D≤0.3		0	1		
		D=(Long + Short)/2 *: Disregard					
2	Scratch, Substances	Zone X(mm) Y(mm)		Acceptable Number		Class Of Defects	Acceptable Level
				A	B		
		*	0.04≥W	*	*	Minor	2.5
		3.0≥L	0.06≥W	4	4		
		2.0≥L	0.08≥W	2	3		
		—	0.1<W	0	1		
		X: Length Y: Width *: Disregard Total defects should not exceed 4/module					
3	Air Bubbles (between glass & polarizer)	Zone Dimension		Acceptable Number		Class Of Defects	Acceptable Level
				A	B		
		D≤0.2		*	*	Minor	2.5
		0.2<D≤0.5		2	*		
		0.5<D		0	1		
*: Disregard Total defects shall not excess 3/module.							

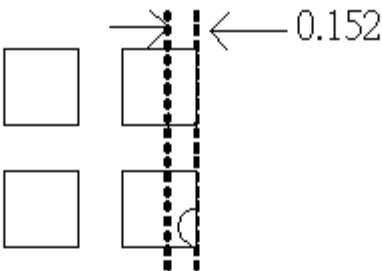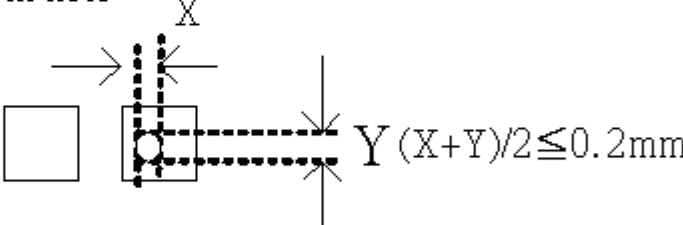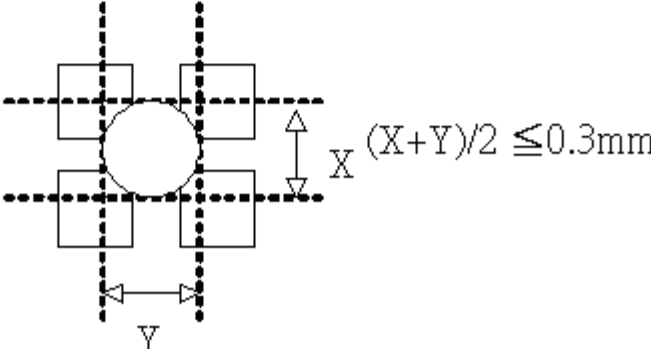

4	Uniformity	(1) Pixel shape (with Dent)  (2) Pixel shape (With Projection)  Should not be connected to next pixel (3) Pin hole  $(X+Y)/2 \leq 0.2\text{mm}$ (Less than 0.1mm is no counted) (4) Deformation  $(X+Y)/2 \leq 0.3\text{mm}$ Total acceptable number : 1/pixel,5/cell
---	------------	---



11. Reliability


Content of Reliability Test

Environmental Test				
No.	Test Item	Content of Test	Test Condition	Applicable Standard
1	High Temperature storage	Endurance test applying the high storage temperature for a long time.	80°C 96hrs	—
2	Low Temperature storage	Endurance test applying the high storage temperature for a long time.	-30°C 96hrs	—
3	High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	70°C 96hrs	—
4	Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-20°C 96hrs	—
5	Humidity Test	Endurance test applying the high humidity storage for a long time.	40°C, 90%RH 96hrs	—
6	Thermal Shock Test	Endurance test applying the low and high temperature cycle. -30°C 25°C 80°C ← → 30min 5min 30min 1 cycle	-30°C / 80°C 5 cycles	—
7	Vibration test	Endurance test applying the vibration during transportation and using.	Total Fixed Amplitude: 1.5mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 direction of X,Y,Z for each 15minutes	—

***Supply voltage for logic system=5V. Supply voltage for LCD system =Operating voltage at 25°C

12. Appendix (Drawing, ST7066U controller data)

12-1 Drawing

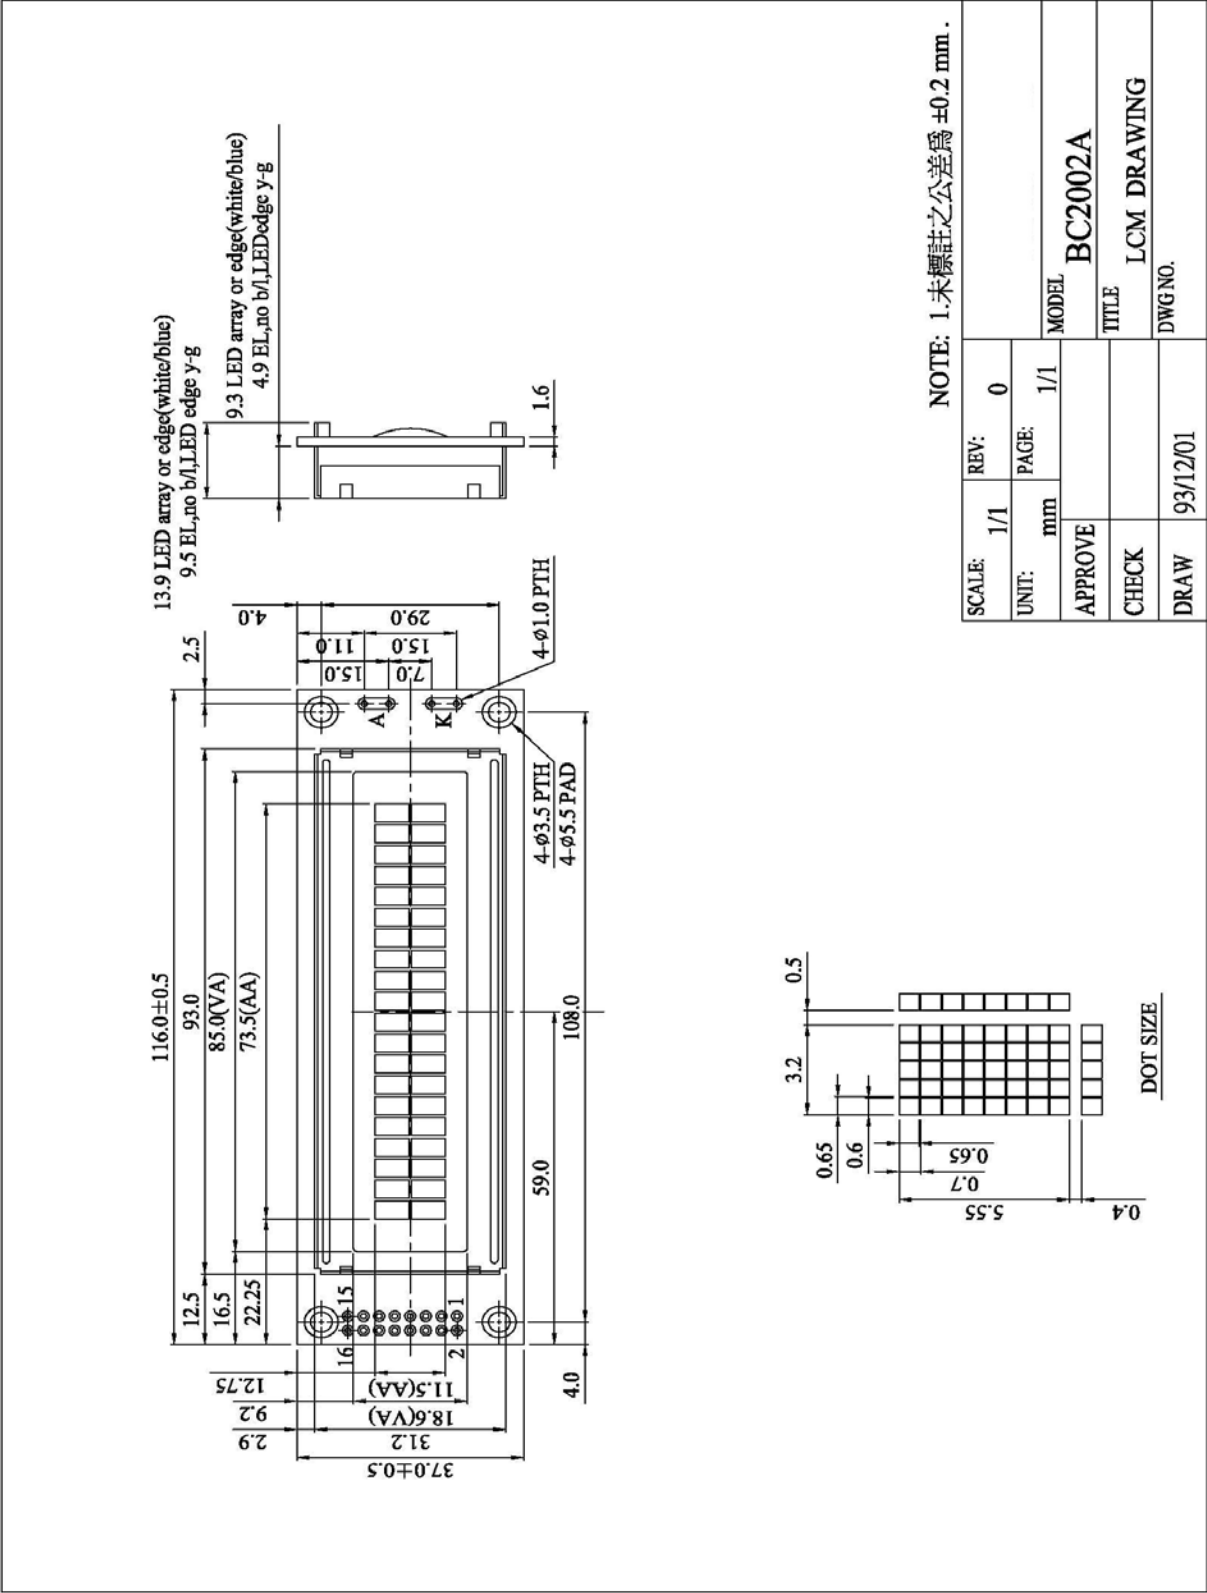



12-2. ST7066U controller data

12-2.1 Function description

The LCD display Module is built in a LSI controller, the controller has two 8-bit registers, an instruction register (IR) and a data register (DR).

The IR stores instruction codes, such as display clear and cursor shift, and address information for display data RAM (DDRAM) and character generator (CGRAM). The IR can only be written from the MPU. The DR temporarily stores data to be written or read from DDRAM or CGRAM. When address information is written into the IR, then data is stored into the DR from DDRAM or CGRAM. By the register selector (RS) signal, these two registers can be selected.

RS	R/W	Operation
0	0	IR write as an internal operation (display clear, etc.)
0	1	Read busy flag (DB7) and address counter (DB0 to DB7)
1	0	Write data to DDRAM or CGRAM (DR to DDRAM or CGRAM)
1	1	Read data from DDRAM or CGRAM (DDRAM or CGRAM to DR)

Busy Flag (BF)


When the busy flag is 1, the controller LSI is in the internal operation mode, and the next instruction will not be accepted. When RS=0 and R/W=1, the busy flag is output to DB7. The next instruction must be written after ensuring that the busy flag is 0.

Address Counter (AC)

The address counter (AC) assigns addresses to both DDRAM and CGRAM

Display Data RAM (DDRAM)

This DDRAM is used to store the display data represented in 8-bit character codes. Its extended capacity is 80×8 bits or 80 characters. Below figure is the relationship between DDRAM addresses and positions on the liquid crystal display.

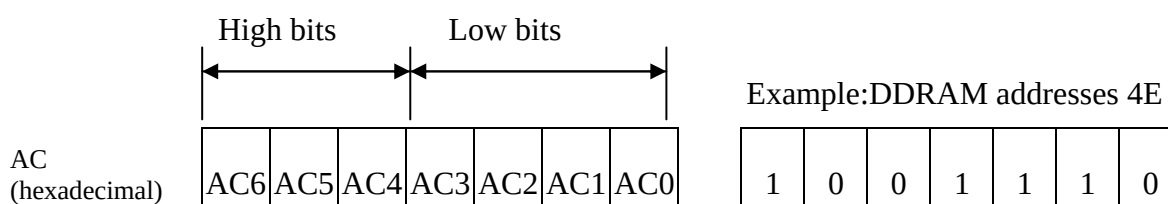



DDRAM Address

Display position DDRAM address

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F	10	11	12	13
40	41	42	43	44	45	46	47	48	49	4A	4B	4C	4D	4E	4F	50	51	52	53

Example: 2-Line by 20-Character Display

Character Generator ROM (CGROM)

The CGROM generate 5×8 dot or 5×10 dot character patterns from 8-bit character codes. See Table 2.

Character Generator RAM (CGRAM)

In CGRAM, the user can rewrite character by program. For 5×8 dots, eight character patterns can be written, and for 5×10 dots, four character patterns can be written.

Write into DDRAM the character code at the addresses shown as the left column of table 1. To show the character patterns stored in CGRAM.

Relationship between CGRAM Addresses, Character Codes (DDRAM) and Character Patterns (CGRAM Data)

For 5 * 8 dot character patterns

Character Codes (DDRAM data)	CGRAM Address	Character Patterns (CGRAM data)
7 6 5 4 3 2 1 0 High Low	5 4 3 2 1 0 High Low	7 6 5 4 3 2 1 0 High Low
0 0 0 0 * 0 0 0	0 0 0	* * * 0 * * * 0 0 0 * * * 0 0 0 * * * 0 * * * 0 0 0 * * * 0 0 0 * * * 0 0 0 0 * * * 0 0 0 0 * * * 0 0 0 0 * * * 0 0 0 0 * * * 0 0 0 0 * * * 0 0 0 0
0 0 0 0 * 0 0 1	0 0 1	* * * 0 * * * 0 0 0 * * * 0 0 0 * * * 0 * * * 0 0 0 * * * 0 0 0 * * * 0 0 0 0 * * * 0 0 0 0 * * * 0 0 0 0 * * * 0 0 0 0 * * * 0 0 0 0 * * * 0 0 0 0

For 5 * 10 dot character patterns

Character Codes (DDRAM data)	CGRAM Address	Character Patterns (CGRAM data)
7 6 5 4 3 2 1 0 High Low	5 4 3 2 1 0 High Low	7 6 5 4 3 2 1 0 High Low
0 0 0 0 * 0 0 0	0 0	* * * 0 0 0 0 0 * * * 0 0 0 0 0 * * * 0 0 0 0 * * * 0 0 0 * * * 0 0 0 * * * 0 0 0 * * * 0 0 0 0 * * * 0 0 0 0 * * * 0 0 0 0 * * * 0 0 0 0 * * * 0 0 0 0

■ : " High "



12-2-2 C.G ROM table. table

Code J: English –European Font

Upper 4 bit Lower 4 bit		LLLL	LL LH	LL HL	LL HH	LH LL	LH LH	LH HL	LH HH	HL LL	HL LH	HL HL	HL HH	HH LL	HH LH	HH HL	HH HH
LLLL	CG RAM (1)																
LL LH	CG RAM (2)																
LL HL	CG RAM (3)																
LL HH	CG RAM (4)																
LH LL	CG RAM (5)																
LH LH	CG RAM (6)																
LH HL	CG RAM (7)																
LH HH	CG RAM (8)																
HL LL	CG RAM (1)																
HL LH	CG RAM (2)																
HL HL	CG RAM (3)																
HL HH	CG RAM (4)																
HH LL	CG RAM (5)																
HH LH	CG RAM (6)																
HH HL	CG RAM (7)																
HH HH	CG RAM (8)																




12-2-3 Instruction table

Instruction	Instruction Code										Description	Execution time (fosc=270Khz)
	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0		
Clear Display	0	0	0	0	0	0	0	0	0	1	Write "00H" to DDRAM and set DDRAM address to "00H" from AC	1.52ms
Return Home	0	0	0	0	0	0	0	0	1	—	Set DDRAM address to "00H" from AC and return cursor to its original position if shifted. The contents of DDRAM are not changed.	1.52ms
Entry Mode Set	0	0	0	0	0	0	0	1	I/D	SH	Assign cursor moving direction and enable the shift of entire display.	37 μ s
Display ON/OFF Control	0	0	0	0	0	0	1	D	C	B	Set display (D), cursor (C), and blinking of cursor (B) on/off control bit.	37 μ s
Cursor or Display Shift	0	0	0	0	0	1	S/C	R/L	—	—	Set cursor moving and display shift control bit, and the direction, without changing of DDRAM data.	37 μ s
Function Set	0	0	0	0	1	DL	N	F	—	—	Set interface data length (DL:8-bit/4-bit), numbers of display line (N:2-line/1-line)and, display font type (F:5x11 dots/5x8 dots)	37 μ s
Set CGRAM Address	0	0	0	1	AC5	AC4	AC3	AC2	AC1	AC0	Set CGRAM address in address counter.	37 μ s
Set DDRAM Address	0	0	1	AC6	AC5	AC4	AC3	AC2	AC1	AC0	Set DDRAM address in address counter.	37 μ s
Read Busy Flag and Address	0	1	BF	AC6	AC5	AC4	AC3	AC2	AC1	AC0	Whether during internal operation or not can be known by reading BF. The contents of address counter can also be read.	0 μ s
Write Data to RAM	1	0	D7	D6	D5	D4	D3	D2	D1	D0	Write data into internal RAM (DDRAM/CGRAM).	37 μ s
Read Data from RAM	1	1	D7	D6	D5	D4	D3	D2	D1	D0	Read data from internal RAM (DDRAM/CGRAM).	37 μ s

* " — " : don' t care

12-2-4 Timing characteristics


12-2-4-1 Write Operation

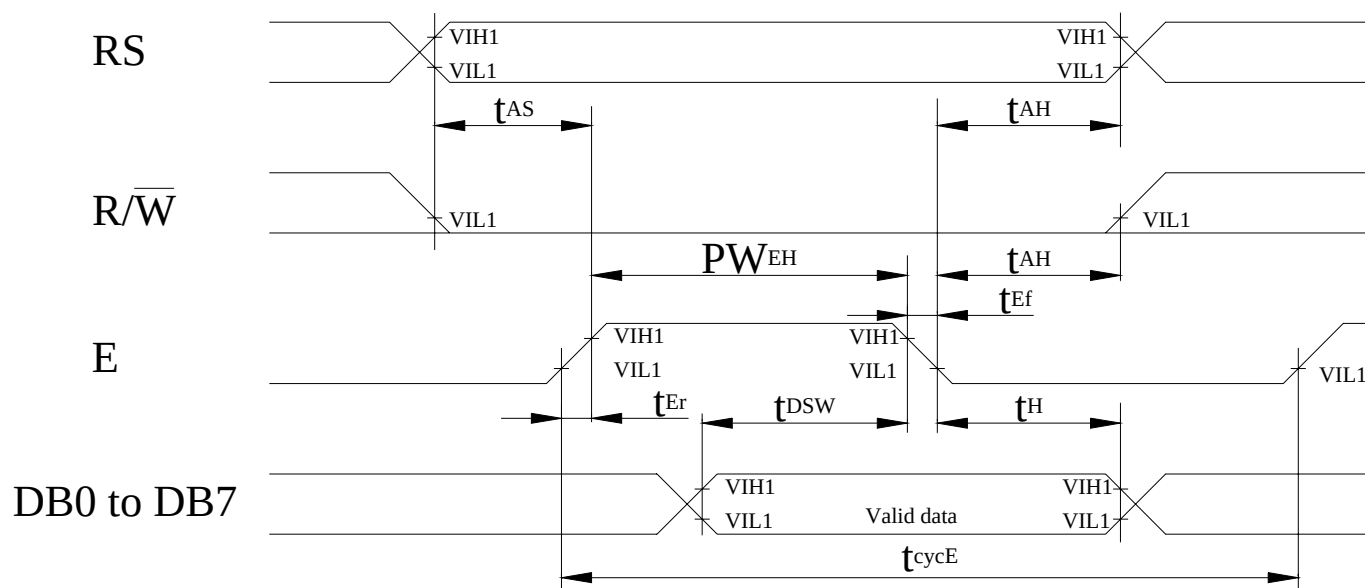

$T_a=25^{\circ}\text{C}$, $V_{dd}=5.0\pm0.5\text{V}$

Item	Symbol	Min	Typ	Max	Unit
Enable cycle time	t_{cycE}	1400	—	—	ns
Enable pulse width (high level)	PW_{EH}	140	—	—	ns
Enable rise/fall time	t_{Er}, t_{Ef}	—	—	25	ns
Address set-up time (RS, R/W to E)	t_{AS}	0	—	—	ns
Address hold time	t_{AH}	10	—	—	ns
Data set-up time	t_{DSW}	40	—	—	ns
Data hold time	t_H	10	—	—	ns

12-2-4-2 Read Operation

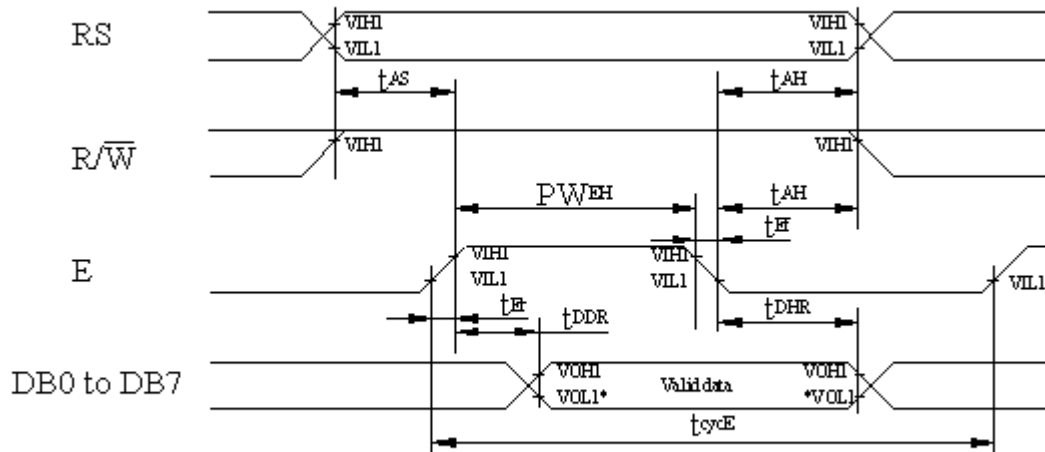


$T_a=25^{\circ}\text{C}$, $V_{dd}=5.0\pm0.5\text{V}$

Item	Symbol	Min	Typ	Max	Unit
Enable cycle time	t_{cycE}	1400	—	—	ns
Enable pulse width (high level)	PW_{EH}	140	—	—	ns
Enable rise/fall time	t_{Er}, t_{Ef}	—	—	25	ns
Address set-up time (RS, R/W to E)	t_{AS}	0	—	—	ns
Address hold time	t_{AH}	10	—	—	ns
Data delay time	t_{DDR}	—	—	100	ns
Data hold time	t_{DHR}	10	—	—	ns

12-2-5 Initializing soft ware of LCM

12-2-5-1 8-bit interface

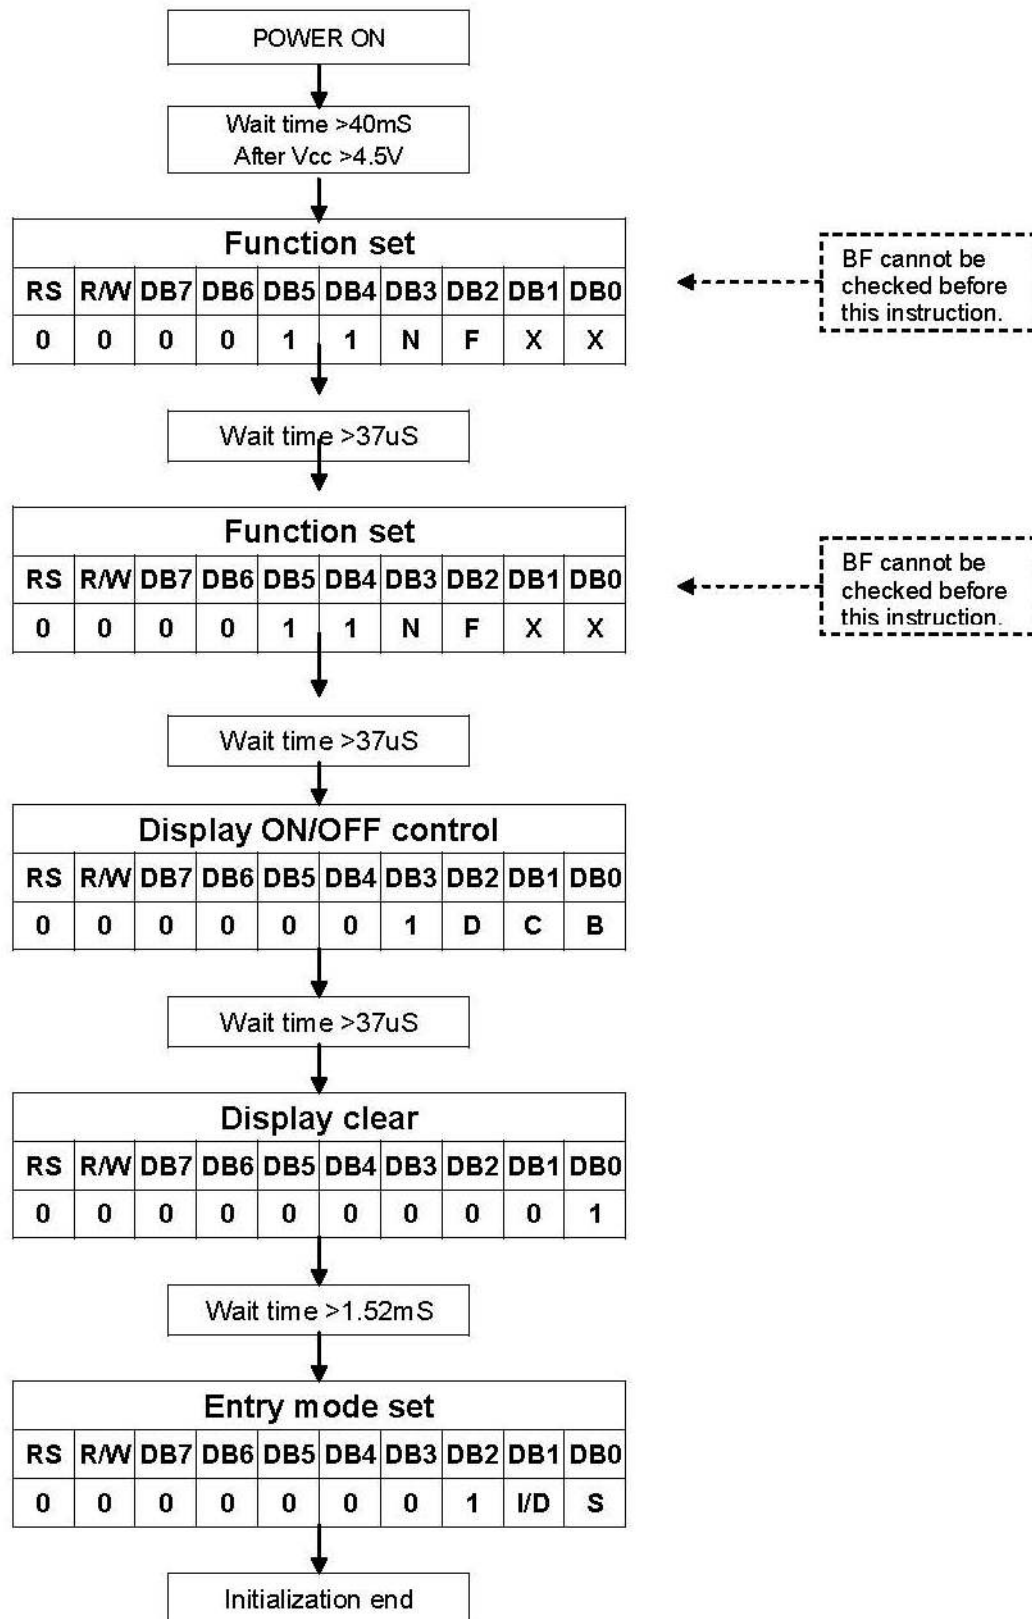

12-2-5-2 4-bit interface

