

BC847B, BC847C

General Purpose SMD NPN Transistors



SOT-23




Features:


- Silicon planar epitaxial transistors.
- General purpose NPN transistors.

Pin Configuration

1. Base
2. Emitter
3. Collector



Package Outline Details

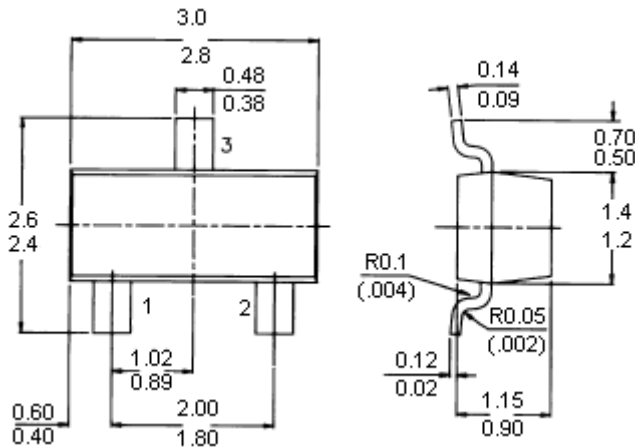

Absolute Maximum Ratings

	Symbol		BC847B	BC847C	Units
Collector-emitter voltage ($V_{BE} = 0$)	V_{CES}	Maximum	50		V
Collector-emitter voltage (open base)	V_{CEO}		45		
Collector current (peak value)	I_{CM}		200		mA
Total power dissipation up to $T_{amb} = 25^{\circ}C$	P_{tot}		250		mW
Junction temperature	T_j		150		$^{\circ}C$



BC847B, BC847C

General Purpose SMD NPN Transistors



Absolute Maximum Ratings

	Symbol		BC847B	BC847C	Units
Small-signal current gain $I_C = 2\text{mA}$; $V_{CE} = 5\text{V}$; $f = 1\text{kHz}$	h_{fe}	Minimum	125		-
Transition frequency at $f = 100\text{MHz}$ $I_C = 10\text{mA}$; $V_{CE} = 5\text{V}$	f_T	Minimum	>100		MHz
Noise figure at $R_S = 2\text{k}\Omega$ $I_C = 200\text{mA}$; $V_{CE} = 5\text{V}$ $f = 1\text{kHz}$; $B = 200\text{Hz}$	F	Typical	2		dB

Ratings (at $T_A = 25^\circ\text{C}$ unless otherwise specified)

	Symbol		BC847B	BC847C	Units
Collector-base voltage (open emitter)	V _{CBO}	Maximum	50		V
Collector-emitter voltage (V _{BE} = 0)	V _{CES}				
Collector-emitter voltage (open base)	V _{CEO}				
Emitter-base voltage (open collector)	V _{EBO}		6		
Collector current (dc)	I _C		100		mA
Collector current (peak value)	I _{CM}		200		
Emitter current (peak value)	-I _{EM}				
Base current (peak value)	I _{BM}		250		
Total power dissipation upto T _{amb} : 25°C	P _{tot}				
Storage temperature	T _{stg}	-	-55 to +150		°C
Junction temperature	T _j	Maximum	150		
Thermal Resistance					
From junction to ambient	R _{th(j-a)}	=	500		K/W

Characteristics ($T_J = 25^\circ\text{C}$ unless otherwise specified)

Collector cut off current $I_E = 0$; $V_{CB} = 30\text{V}$ $I_E = 0$; $V_{CB} = 30\text{V}$; $T_J = 150^\circ\text{C}$	I_{CBO}	<	15 5	nA μA
Base-emitter voltage $I_C = 2\text{mA}$; $V_{CE} = 5\text{V}$	V_{BE}	Typical	660	mV
$I_C = 10\text{mA}$; $V_{CE} = 5\text{V}$	V_{BE}	<	580 to 700 770	
Saturation voltage	$V_{CE(sat)}$	Typical	90	
$I_C = 10\text{mA}$; $I_B = 0.5\text{mA}$	$V_{BE(sat)}$	<	250	
		Typical	700	
$I_C = 100\text{mA}$; $I_B = 5\text{mA}$	$V_{CE(sat)}$	Typical	200	
		<	600	
	$V_{BE(sat)}$	Typical	900	



BC847B, BC847C

General Purpose SMD NPN Transistors



Ratings (at $T_A = 25^\circ\text{C}$ unless otherwise specified))

	Symbol		BC847B	BC847C	Units
Collector capacitance at $f = 1\text{MHz}$ $I_E = I_e = 0$; $V_{CB} = 10\text{V}$	C_C	Typical	2.5		pF
Transition frequency at $f = 100\text{MHz}$ $I_C = 10\text{mA}$; $V_{CE} = 5\text{V}$	f_T	>	100		MHz
Noise figure at $R_S = 2\text{KW}$ $I_C = 200\mu\text{A}$; $V_{CE} = 5\text{V}$; $f = 1\text{kHz}$; $B = 200\text{Hz}$	F	Typical Maximum	2 10		dB
DC current gain $I_C = 10\text{mA}$; $V_{CE} = 5\text{V}$ $I_C = 2\text{mA}$; $V_{CE} = 5\text{V}$	h_{FE}	Typical > Typical <	150 200 290 450	270 420 520 800	-
Small signal current gain at $f = 1\text{kHz}$ $I_C = 2\text{mA}$; $V_{CE} = 5\text{V}$	h_{fe}	Minimum Maximum	125 900		-

Specifications

V_{CEO} (V)	I_C (mA) maximum	F maximum (dB)	P_{tot} (mW)	Device Marking	Part Number
45	100	10	250	IF	BC847B
				IG	BC847C

BC847B, BC847C

General Purpose SMD NPN Transistors



Notes:

International Sales Offices:



AUSTRALIA – Farnell InOne

Tel No: ++ 61 2 9645 8888
Fax No: ++ 61 2 9644 7898



FINLAND – Farnell InOne

Tel No: ++ 358 9 560 7780
Fax No: ++ 358 9 345 5411



NETHERLANDS – Farnell InOne

Tel No: ++ 31 30 241 7373
Fax No: ++ 31 30 241 7333



SWITZERLAND – Farnell InOne

Tel No: ++ 41 1 204 64 64
Fax No: ++ 41 1 204 64 54



AUSTRIA – Farnell InOne

Tel No: ++ 43 662 2180 680
Fax No: ++ 43 662 2180 670



FRANCE – Farnell InOne

Tel No: ++ 33 474 68 99 99
Fax No: ++ 33 474 68 99 90



NEW ZEALAND – Farnell InOne

Tel No: ++ 64 9 357 0646
Fax No: ++ 64 9 357 0656



UK – Farnell InOne

Tel No: ++ 44 8701 200 200
Fax No: ++ 44 8701 200 201



BELGIUM – Farnell InOne

Tel No: ++ 32 3 475 2810
Fax No: ++ 32 3 227 3648



GERMANY – Farnell InOne

Tel No: ++ 49 89 61 39 39 39
Fax No: ++ 49 89 613 59 01



NORWAY – Farnell InOne

Tel No: ++ 45 44 53 66 66
Fax No: ++ 45 44 53 66 02



UK – BuckHickman InOne

++ 44 8450 510 150
++ 44 8450 510 130



BRAZIL – Farnell-Newark InOne

Tel No: ++ 55 11 4066 9400
Fax No: ++ 55 11 4066 9410



HONG KONG – Farnell-Newark InOne

Tel No: ++ 852 2268 9888
Fax No: ++ 852 2268 9899



PORTUGAL – Farnell InOne

Tel No: ++ 34 93 475 8804
Fax No: ++ 34 93 474 5288



UK – CPC

++ 44 8701 202 530
++ 44 8701 202 531



CHINA – Farnell-Newark InOne

Tel No: ++86 10 6238 5152
Fax No: ++86 10 6238 5022



IRELAND – Farnell InOne

Tel No: ++ 353 1 830 9277
Fax No: ++ 353 1 830 9016



SINGAPORE – Farnell-Newark InOne

Tel No: ++ 65 6788 0200
Fax No: ++ 65 6788 0300



EXPORT – Farnell InOne

Tel No: ++ 44 8701 200 208
Fax No: ++ 44 8701 200 209

For enquiries from all other markets



DENMARK – Farnell InOne

Tel No: ++ 45 44 53 66 44
Fax No: ++ 45 44 53 66 06



ITALY – Farnell InOne

Tel No: ++ 39 02 93 995 200
Fax No: ++ 39 02 93 995 300



SPAIN – Farnell InOne

Tel No: ++ 34 93 475 8805
Fax No: ++ 34 93 474 5107



ESTONIA – Farnell InOne

Tel No: ++ 358 9 560 7780
Fax No: ++ 358 9 345 5411



MALAYSIA – Farnell-Newark InOne

Tel No: ++ 60 3 7873 8000
Fax No: ++ 60 3 7873 7000



SWEDEN – Farnell InOne

Tel No: ++ 46 8 730 50 00
Fax No: ++ 46 8 83 52 62

<http://www.farnellinone.com>

<http://www.buckhickmaninone.com>

<http://www.cpc.co.uk>

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2004.

