

Silicon NPN Power Transistors

BD941F

DESCRIPTION

- With TO-220F package
- Low collector saturation voltage

APPLICATIONS

- For power switching applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector;connected to mounting base
3	Emitter




Fig.1 simplified outline (TO-220F) and symbol

Absolute maximum ratings($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	140	V
V_{CEO}	Collector-emitter voltage	Open base	140	V
V_{EBO}	Emitter-base voltage	Open collector	7	V
I_C	Collector current		3	A
I_{CM}	Collector current-Peak		6	A
P_C	Collector dissipation	$T_C=25^\circ\text{C}$	14	W
T_j	Junction temperature		150	$^\circ\text{C}$
T_{stg}	Storage temperature		-50~150	$^\circ\text{C}$

Silicon NPN Power Transistors

BD941F

CHARACTERISTICS

Tj=25°C unless otherwise specified

www.datasheet4u.com


SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=10mA; I_B=0$	140			V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E=1mA; I_C=0$	7			V
V_{CEsat}	Collector-emitter saturation voltage	$I_C=1A; I_B=0.2A$			0.7	V
V_{BEsat}	Base-emitter saturation voltage	$I_C=1A; I_B=0.2A$			1.5	V
I_{CBO}	Collector cut-off current	$V_{CB}=140V; I_E=0$			50	μA
I_{EBO}	Emitter cut-off current	$V_{EB}=7V; I_C=0$			50	μA
h_{FE-1}	DC current gain	$I_C=0.2A; V_{CE}=4V$	40		250	
h_{FE-2}	DC current gain	$I_C=1A; V_{CE}=4V$	15			
f_T	Transition frequency	$I_C=0.25A; V_{CE}=10V$	3			MHz

Silicon NPN Power Transistors

BD941F

PACKAGE OUTLINE

www.datasheet4u.com

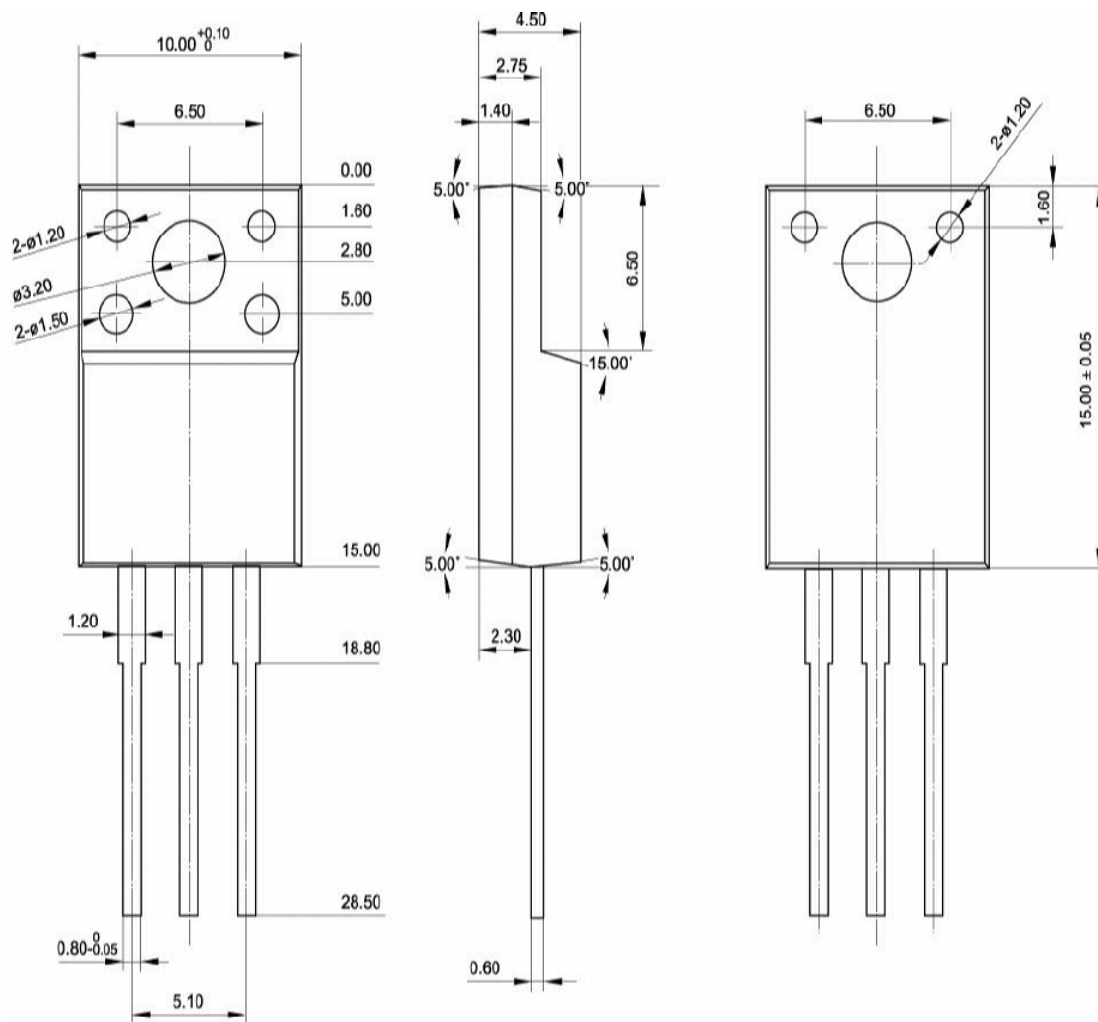Fig.2 Outline dimensions (unindicated tolerance: $\pm 0.10\text{mm}$)