


BGT24AT2

Silicon Germanium 24 GHz Transmitter MMIC

Features

- 24 GHz signal source with 2 transmitter outputs and 1 local oscillator output
- External / internal phase inversion and RF pulsing capability
- Programmable gain amplifiers (PGA) with 6 bit resolution
- Fully integrated low phase noise VCO
- Frequency divider with 23.5 MHz output
- On chip RF level and temperature sensors
- Multiplexed output of analog sensor signals
- Single ended RF terminals
- Single supply voltage: 3.3 V typ.
- Low power consumption: 775 mW typ.
- 200 GHz bipolar SiGe:C technology b7hf200
- Fully ESD protected device
- VQFN-32-9 leadless plastic package including lead-tip-inspection (LTI) feature

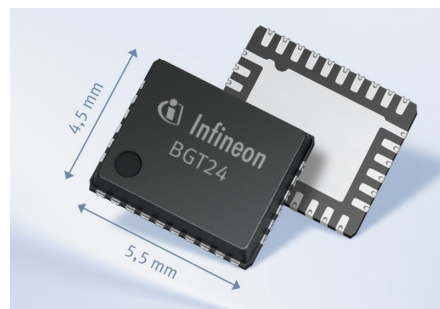

Description

The BGT24AT2 is a low phase noise 24 GHz ISM band multifunction signal source, manufactured in a monolithic Silicon Germanium semiconductor process technology.

It accommodates a 24 GHz fundamental voltage controlled oscillator and a frequency divider with a division ratio of 1024. The frequency divider output is differential.

The three individual RF outputs generate a typical output power of +10 dBm, adjustable via SPI-programmable 6 bit DAC's. Fast pulsing and phase inversion of the transmit signal is provided either using dedicated control inputs or the 64 bit SPI. Automatic configuration of the LO-output is possible using a dedicated logic.

RF output level sensors as well as a temperature sensor are implemented for monitoring purposes. The analog sensor signals along with an additional optional analog input are multiplexed to one common output.

The MMIC is manufactured in a 200 GHz, 0.18µm SiGe:C technology and is packaged in a 32 pin leadless RoHS compliant VQFN package with LTI feature.

Product Validation

Qualified for Automotive Applications. Product Validation according to AEC-Q100/101.

Product Name	Package	Chip	Marking
BGT24AT2	VQFN32-9	T1824	BGT24AT2

Revision History

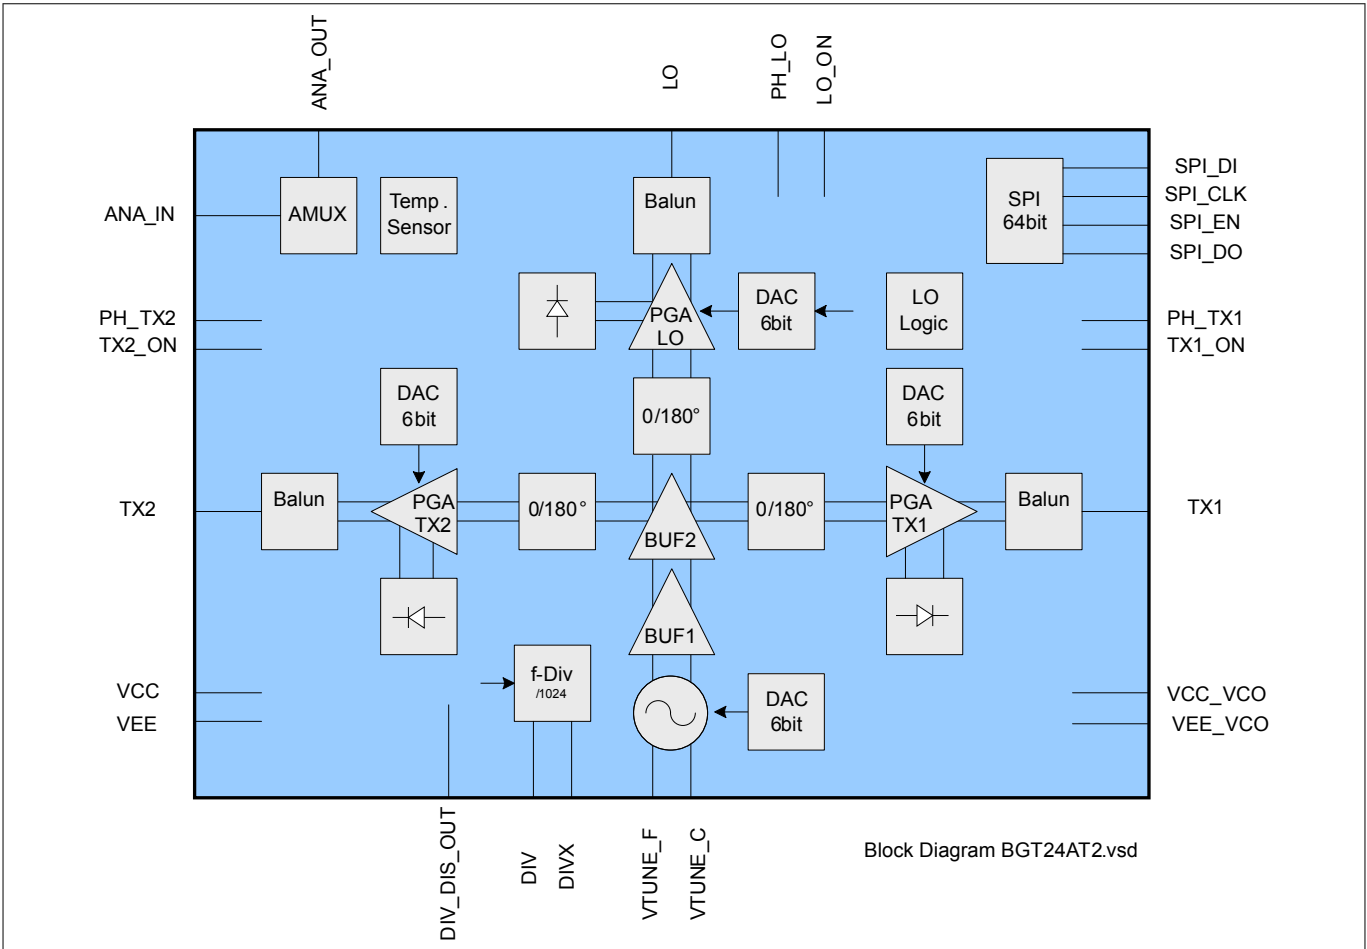


Figure 1 BGT24AT2 Block Diagram

Revision History

Revision History: 2019-12-05, Revision 3.4

Previous Revision: 2019-10-31, Revision 3.3

Page	Subjects (major changes since last revision)
7	VCO frequency range extended typ. and max. value
11	Output match (S_{22}) max. value added

Table of contents

	Features	1
	Revision History	2
	Table of contents	3
	List of tables	4
	List of figures	5
1	Electrical Characteristics	6
1.1	Absolute Maximum Ratings	6
1.2	ESD Integrity	7
1.3	Power Supply	7
1.4	VCO	8
1.5	Frequency Divider	9
1.6	TX and LO PGA	11
1.7	Temperature Sensor	13
1.8	Output Level Detector	13
1.9	Sensor Multiplexer	14
2	Pin Description	15
3	SPI	19
4	Sensor Multiplexer	22
5	LO Logic	23
6	Package Dimensions	24
	Disclaimer	25

List of tables

List of tables

Table 1	Absolute Maximum Ratings	6
Table 2	ESD Integrity	7
Table 3	Electrical Characteristics	7
Table 4	Electrical Characteristics	8
Table 5	Frequency Divider Truth Table ⁸⁾⁹⁾	10
Table 6	Electrical Characteristics	10
Table 7	Electrical Characteristics	11
Table 8	Electrical Characteristics	13
Table 9	Electrical Characteristics	13
Table 10	Electrical Characteristics	14
Table 11	Pin Definition and Function	15
Table 12	I/O internal circuits	16
Table 13	SPI Data Bit Description	19
Table 14	SPI Interface	21
Table 15	Specification for SPI pins	22
Table 16	Truth Table AMUX ¹⁾	23
Table 17	Truth Table LO Logic	23

List of figures

List of figures

Figure 1	BGT24AT2 Block Diagram	2
Figure 2	Block Diagram Frequency Divider	10
Figure 3	Timing Diagram of the SPI	21
Figure 4	Package Outline (Top, Side and Bottom View) of VQFN32-9	24
Figure 5	Marking Layout VQFN32-9 (example)	24
Figure 6	Tape of VQFN32-9, Ø Reel: 330 mm, Pieces / Reel: 3000, Reels / Box: 1	24

1 Electrical Characteristics

1 Electrical Characteristics

1.1 Absolute Maximum Ratings

Table 1 Absolute Maximum Ratings

$T_A = -40\text{ °C}$ to 125 °C ; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Test	Note or Test Condition
		Min.	Typ.	Max.			
Supply voltage	V_{CC}	-0.3	–	$V_{CC} + 0.3$	V	■	–
Voltage applied to none-RF pins ⁽¹⁾	V_{IO}	-0.3	–	$V_{CC} + 0.3$	V	■	–
DC voltage at RF pins	$V_{DC_{RF}}$	–	–	0	V	■	MMIC provides short circuit to GND for TX1, TX2 and LO pins
DC voltage at pins VTUNE_F, VTUNE_C	V_{TUNE}	-0.3	–	$V_{CC} + 0.3$	V	■	–
DC voltage at pins DIV, DIVX	$V_{DIVIDER}$	2	–	$V_{CC} + 0.3$	V	■	–
Total power dissipation	P_{DISS}	–	–	1000	mW	■	–
Junction temperature	T_J	-40	–	170	°C	■	–
Ambient temperature range	T_A	-40	–	125	°C	■	T_A = temperature at package soldering point
Storage temperature range	T_{STG}	-50	–	125	°C	■	–

(1) For SPI_EN, SPI_DI, SPI_CLK the applied voltage may exceed given ratings als long as current into these pins is limited to $I_{SPI} = 1\text{ mA}$

Attention: Stresses exceeding the maximum values listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods of time may affect device reliability. Maximum ratings are absolute ratings; exceeding only one of these values may cause irreversible damage to the integrated circuit.

Attention: Integrated protection functions are designed to prevent IC destruction under fault conditions as described in the data sheet. Fault conditions are considered as “outside” normal operating range. Protection functions are not designed for continuous repetitive operation.

Attention: Test ■ means that the parameter is not subject to production test. It was verified by design / characterization.

Note: No permanent damage of the device is possible due to an undefined SPI state

1 Electrical Characteristics

1.2 ESD Integrity

Table 2 ESD Integrity

Parameter	Symbol	Values			Unit	Test	Note or Test Condition
		Min.	Typ.	Max.			
ESD robustness HBM ⁽¹⁾	$V_{\text{ESD-HBM}}$	-1	–	1	kV	■	All pins
ESD robustness, CDM ⁽²⁾	$V_{\text{ESD-CDM}}$	-500	–	500	V	■	All pins
		-750	–	750		■	Package corner pins

(1) According to ANSI/ESDA/JEDEC JS-001 (R = 1.5kOhm, C = 100pF) for Electrostatic Discharge Sensitivity Testing, Human Body Model (HBM)-Component Level

(2) According to JEDEC JESD22-C101 Field-Induced Charged Device Model (CDM), Test Method for Electrostatic-Discharge-Withstand Thresholds of Microelectronic Components

Please note that this result is subject to:

- lot variations within the manufacturing process as specified by Infineon
- changes in the specific test setup

Attention: Test ■ means that the parameter is not subject to production test. It was verified by design / characterization.

1.3 Power Supply

Table 3 Electrical Characteristics

$T_A = -40\text{ °C} \dots 125\text{ °C}$, positive current flowing into pin (unless otherwise specified).

Parameter	Symbol	Values			Unit	Test	Note or Test Condition
		Min.	Typ.	Max.			
Supply voltage	V_{CC}	3.135	3.3	3.465	V		–
Supply current nominal operation mode	$I_{\text{CC,ON}}$	–	235	280	mA		nom. operation mode, SPI-state: 9F7F 2903 9F7C 10FF Hex
Supply current standby mode	$I_{\text{CC,STDBY}}$	–	65	85	mA		all functional blocks disabled, SPI-state: 0000 0000 0000 0000 Hex

1 Electrical Characteristics

1.4 VCO

Table 4 **Electrical Characteristics**

$V_{CC} = 3.135 \text{ V to } 3.465 \text{ V}$, $T_A = -40 \text{ }^{\circ}\text{C to } 125 \text{ }^{\circ}\text{C}$, PGA output power = P_{max} , all voltages with respect to ground, positive current flowing into pin (unless otherwise specified), parameters specified in the frequency range from 24 GHz to 24.3 GHz including matching structure and a package footprint provided by Infineon using the high frequency laminate Rogers 4350B (see AN359)

Parameter	Symbol	Values			Unit	Test	Note or Test Condition
		Min.	Typ.	Max.			
VCO frequency range	f_{VCO}	24.00	24.15	24.3	GHz		_(1) (2)
VCO tuning voltage for VCO frequency range	V_{TUNE_F}	0.1	–	0.9	V		–
Number of usable VCO coarse tune DAC states	n	2	–	–	–		VTUNE_F applied via series resistor $\geq 1 \text{ k}\Omega$
VCO phase noise @ 1 kHz	$P_{N,P \text{ 1kHz}}$	–	-30	-18	dBc/Hz	■	–
VCO phase noise @ 10 kHz	$P_{N,P \text{ 10kHz}}$	–	-59	-50	dBc/Hz	■	–
VCO phase noise @ 100 kHz	$P_{N,P \text{ 100kHz}}$	–	-82	-76.4	dBc/Hz		–
VCO phase noise @ 1 MHz	$P_{N,P \text{ 1MHz}}$	–	-103	-97.4	dBc/Hz	■	–
VCO phase noise @ 10 MHz	$P_{N,P \text{ 10MHz}}$	–	-123	-117.4	dBc/Hz	■	–
VCO amplitude noise @ 10 kHz	$P_{N,A \text{ 10kHz}}$	–	–	-125	dBc/Hz	■	measured at +4 dBm output power
VCO amplitude noise @ 100 kHz	$P_{N,A \text{ 100kHz}}$	–	–	-135	dBc/Hz	■	measured at +4 dBm output power
VCO amplitude noise @ 1 MHz	$P_{N,A \text{ 1MHz}}$	–	-150	-145	dBc/Hz	■	measured at +4 dBm output power
VTUNE_F input resistance	R_{VTUNE_F}	100	–	–	k Ω	■	nonlinear, see leakage current specification
Leakage current at pin VTUNE_F	I_{VTUNE_F}	-40	–	–	μA		at min. tuning voltage
VTUNE_F input capacitance	C_{VTUNE_F}	–	–	10	pF	■	–
VTUNE_C input resistance	R_{VTUNE_C}	1440	1800	2160	Ω	■	–
VTUNE_C DAC current for PGA state 63	$I_{VTUNE_C,DAC}$	1.2	–	–	mA	■	–
Static pulling f_{VCO} change vs. load	Δf_{sp}	-1	–	+1	MHz	■	at all TX ports, 10 dB mismatch, all phases
Dynamic pulling phase and TX switch change	Δf_{dp1}	-1	–	+1	MHz	■	at all TX ports, 10 dB mismatch, all phases
Dynamic pulling TX1 to TX2 switch change	Δf_{dp2}	-1	–	+1	MHz	■	at all TX ports, 10 dB mismatch, all phases
VCO pushing	$\Delta f / \Delta V_{CC}$	-20 -60	– –	+20 +60	MHz/V	■	$V_{CC} \geq 3.2 \text{ V}$, $T_A \geq -20 \text{ }^{\circ}\text{C}$ (3) (3)

1 Electrical Characteristics

Table 4 **Electrical Characteristics (continued)**

$V_{CC} = 3.135 \text{ V}$ to 3.465 V , $T_A = -40 \text{ }^{\circ}\text{C}$ to $125 \text{ }^{\circ}\text{C}$, PGA output power = P_{max} , all voltages with respect to ground, positive current flowing into pin (unless otherwise specified), parameters specified in the frequency range from 24 GHz to 24.3 GHz including matching structure and a package footprint provided by Infineon using the high frequency laminate Rogers 4350B (see AN359)

Parameter	Symbol	Values			Unit	Test	Note or Test Condition
		Min.	Typ.	Max.			
Spurious level harmonics	a_{harm}	–	–	-32	dBc	■	at max. output power; H2 measured at SWM connector ⁽³⁾
Spurious level non harmonics	a_{nharm}	–	–	-48	dBm	■	–
VCO tuning speed	$\Delta f / \Delta V_t$	70	–	–	MHz/ μs	■	–
VCO tuning sensitivity	$\Delta f / \Delta f_{TUNE_F}$	–	–	2800 2200	MHz/V	■	differential sensitivity lin. between f_1 24.05 GHz and $f_2 = 24.14 \text{ GHz}$
VCO frequency drift ⁽⁴⁾	f_{DRIFT}	–	10	–	kHz	■	–

(1) Proper adjustment of V_{TUNE_C} required to cover frequency band with specified V_{TUNE_F}

(2) Monotonic increasing frequency vs. V_{TUNE_F}

(3)

(4) Within 50ms and under following conditions:

- Ambient temperature - stable
- Supply voltage - stable
- RF ports at least 50 μs after ON/OFF or OFF/ON and phase transitions
- Divider in ON/OFF at least 50 μs after OFF/ON transitions

Attention: Test ■ means that the parameter is not subject to production test. It was verified by design / characterization.

1.5 Frequency Divider

The block diagram of the frequency divider is shown in [Figure 2](#), a compatible truth table is given in [Table 5](#)

1 Electrical Characteristics

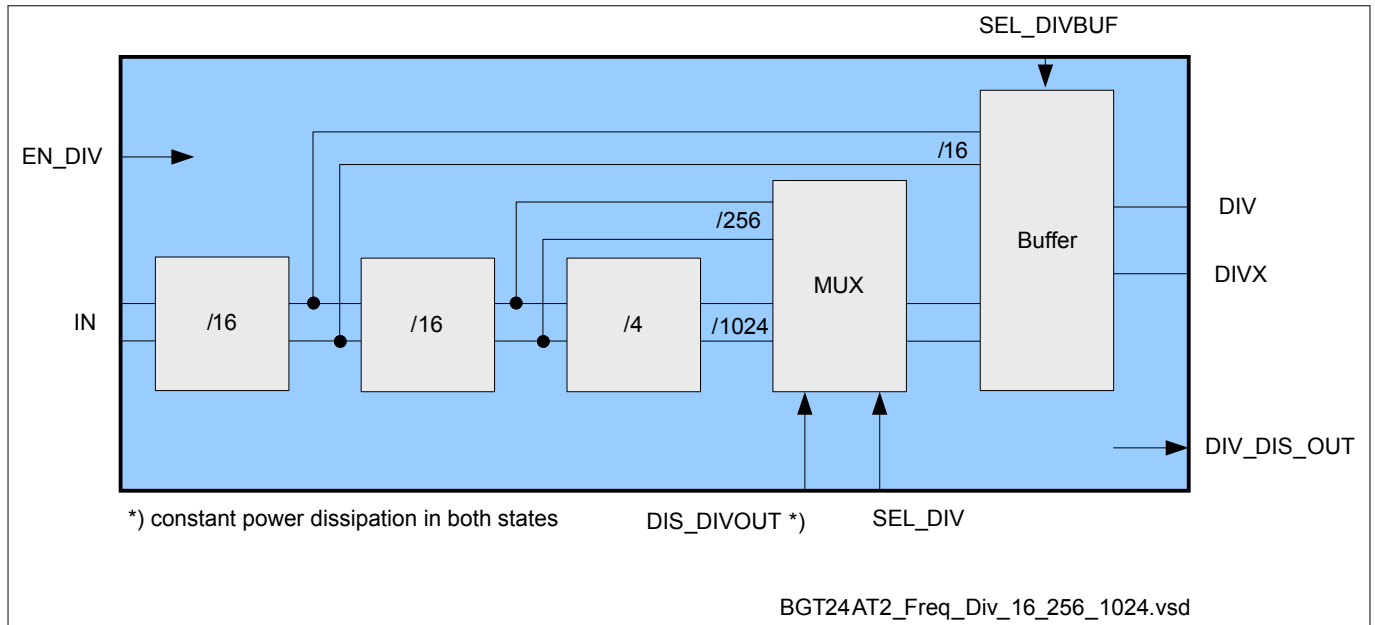


Figure 2 Block Diagram Frequency Divider

Table 5 Frequency Divider Truth Table^{(1) (2)}

EN_DIV	SEL_DIV	SEL_DIVBUF	DIS_DIVOUT	MODE
1	X	1	X	/16
1	1	0	0	/256
1	0	0	0	/1024
1	X	0	1	output disabled
0	X	X	X	shutdown

(1) deviating states not allowed, undefined divider output

(2) modes /16 and /256 for information only!

Table 6 Electrical Characteristics

$V_{CC} = 3.135 \text{ V to } 3.465 \text{ V}$, $T_A = -40 \text{ }^{\circ}\text{C to } 125 \text{ }^{\circ}\text{C}$, VCO frequency = 24.0 to 24.3 GHz, divider division ratio = 1024, all voltages with respect to ground (unless otherwise specified).

Parameter	Symbol	Values			Unit	Test	Note or Test Condition
		Min.	Typ.	Max.			
Dividing factor	D_{DIV}	–	256 1024	–	–		–
Divider output impedance	Z_{OUT}	240	300	360	Ω	■	Into MMIC1 ⁽¹⁾
Output voltage	$V_{DIV,1024}$	900	1150	1400	mVpp		Into 300 Ω load ⁽²⁾

1 Electrical Characteristics

Table 6 Electrical Characteristics (continued)

$V_{CC} = 3.135\text{ V to } 3.465\text{ V}$, $T_A = -40\text{ °C to } 125\text{ °C}$, VCO frequency = 24.0 to 24.3 GHz, divider division ratio = 1024, all voltages with respect to ground (unless otherwise specified).

Parameter	Symbol	Values			Unit	Test	Note or Test Condition
		Min.	Typ.	Max.			
Common mode output voltage	$V_{DIV,CM,EN}$	2.35	2.75	3.15	V		Output enabled ⁽²⁾
	$V_{DIVX,CM,EN}$	2.35	2.75	3.15			Output enabled ⁽²⁾
	$V_{DIV,CM,DIS}$	–	V_{CC}	–			Output enabled ⁽²⁾
	$V_{DIVX,CM,DIS}$	1.6	2.15	2.60			Output enabled ⁽²⁾
	$V_{DIV,CM,OFF}$	–	V_{CC}	–		■	Shutdown ⁽²⁾
	$V_{DIVX,CM,OFF}$	–	V_{CC}	–		■	Shutdown ⁽²⁾
Duty cycle	DC	–	0.5	–	–	■	–

(1) Divider output stable for VSWR < 20:1

(2) Measured using T-pad-attenuator on reference PCB as provided by Infineon (see Application Note AN359)

Attention: Test ■ means that the parameter is not subject to production test. It was verified by design / characterization.

1.6 TX and LO PGA

Table 7 Electrical Characteristics

$V_{CC} = 3.135\text{ V to } 3.465\text{ V}$, $T_A = -40\text{ °C to } 125\text{ °C}$, PGA output power = P_{max} , positive current flowing into pin (unless otherwise specified), parameters specified in the frequency range from 24 GHz to 24.3 GHz include matching structures and a package footprint provided by Infineon using the high frequency laminate Rogers 4350B (see AN358).

Reference board losses and 2.92 mm connector loss deembedded to outer trafo edge (reference plane).

Parameter	Symbol	Values			Unit	Test	Note or Test Condition
		Min.	Typ.	Max.			
Output power PGA_{min}	P_{min}	–	–	-26	dBm		–
Output power PGA_{max}	P_{max}	7	10	13	dBm		–
PGA coarse resolution interval	R_C	–	–	8	dB/bit	■	$P_{out} \geq -26\text{ dBm}$
PGA mid resolution interval	R_M	–	–	3	dB/bit		$P_{out} \geq -13\text{ dBm}$
PGA fine resolution interval	R_F	–	–	0.6	dB/Bit		$P_{out} \geq +1\text{ dBm}$
Output power variation in temp. range	ΔP_{TXtemp}	-1.25	–	0.75	dB	■	–

1 Electrical Characteristics

Table 7 **Electrical Characteristics (continued)**

$V_{CC} = 3.135 \text{ V}$ to 3.465 V , $T_A = -40 \text{ }^{\circ}\text{C}$ to $125 \text{ }^{\circ}\text{C}$, PGA output power = P_{max} , positive current flowing into pin (unless otherwise specified), parameters specified in the frequency range from 24 GHz to 24.3 GHz include matching structures and a package footprint provided by Infineon using the high frequency laminate Rogers 4350B (see AN358).

Reference board losses and 2.92 mm connector loss deembedded to outer trafo edge (reference plane).

Parameter	Symbol	Values			Unit	Test	Note or Test Condition
		Min.	Typ.	Max.			
Output match	S_{22}	–	–	-8	dB	■	$V_{CC} = 3.3 \text{ V}$, $T_A = 25 \text{ }^{\circ}\text{C}$ ⁽¹⁾ PGA state ≥ 47 PGA state ≥ 23 PGA state ≥ 0
		–	–	-5.5		■	
		–	–	0		■	
Output impedance	Z_{TX}	–	50	–	Ω	■	Single ended
TX on/off isolation	$I_{TXon/off}$	30	–	–	dB	■	$P_{out} \geq -1 \text{ dBm}$
TX1/TX2 isolation	$I_{TX1/TX2}$	30	–	–	dB	■	$P_{out} \geq -1 \text{ dBm}$
TX on/off switching time	$t_{ON/OFF}$	–	–	2	ns	■	–
Phase shifter phase imbalance	ϵ_p	175	180	185	deg	■	–
Phase shifter amplitude imbalance	ϵ_A	-0.5	0	0.5	dB		–
Phase shifter switching time	t_{PHASE}	–	–	100	ns	■	–

Following parameter for pins: PH_TX1, PH_LO, PH_TX2, TX1_ON, LO_ON, TX2_ON

High-level input voltage	V_{I_high}	2.0	–	–	V	■	–
Low-level input voltage	V_{I_low}	–	–	0.8	V	■	–
Input capacitance	C_{in}	–	–	2	pF	■	–
Pull Up resistor	R_{PL}	27.2	34	40.8	k Ω	■	$T_A = 25 \text{ }^{\circ}\text{C}$
Leakage current into pins	$I_{Leakage}$	-100	–	75	μA		–

(1) SOLT calibration, reference plane at SWM connector

Attention: Test ■ means that the parameter is not subject to production test. It was verified by design / characterization.

1 Electrical Characteristics

1.7 Temperature Sensor

Table 8 Electrical Characteristics

$V_{CC} = 3.3\text{ V}$, $T_A = -40\text{ °C}$ to 125 °C , application and MMIC external circuit acc. to Application Note AN359, all voltages with respect to ground (unless otherwise specified).

Parameter	Symbol	Values			Unit	Test	Note or Test Condition
		Min.	Typ.	Max.			
Temperature sensor operating range	T_{TSENS}	-40	–	125	°C	■	–
Output voltage	V_{TSENSE25}	1.4	1.5	1.6	V		at $T_{\text{Si}} = 25\text{ °C}$
Sensitivity	S_{TSENS}	4.3	4.7	5.1	mV/K	■	–
Setup time	t_{TSENS}	–	–	20	μs	■	$C_{\text{Load}} \leq 2.2\text{ nF}$ and $R_{\text{Load}} \geq 10\text{ k}\Omega$ at ANA_OUT
Power supply rejection ratio	PSRR	16	24	–	dB		measured at $T_{\text{Si}} = 25\text{ °C}$ and $V_{\text{CC,MIN}}/V_{\text{CC,MAX}}$

Attention: Test ■ means that the parameter is not subject to production test. It was verified by design / characterization.

1.8 Output Level Detector

Table 9 Electrical Characteristics

$V_{CC} = 3.3\text{ V}$ to 3.465 V , $T_A = -40\text{ °C}$ to 125 °C , application and MMIC external circuit acc. to Application Note AN359, all voltages with respect to ground (unless otherwise specified).

Parameter	Symbol	Values			Unit	Test	Note or Test Condition
		Min.	Typ.	Max.			
Output voltage	V_{OUT}	1.17	–	1.29	V	■	PGA state = 0, all channels RF off
Detector TX1 and TX2 absolute error	$E_{\text{TX1, TX2}}$	-2	–	+2	dB	■	at $P_{\text{OUT}} > -1\text{ dBm}$, calculation based on equation in App. Note AN359
Detector LO absolute error	E_{LO}	-2	–	+2	dB	■	at $P_{\text{OUT}} > -1\text{ dBm}$, calculation based on equation in App. Note AN359
Setup time	t_{SENS}	–	–	20	μs	■	$C_{\text{LOAD}} \leq 2.2\text{ nF}$ and $R_{\text{LOAD}} \geq 10\text{ k}\Omega$ at ANA_OUT

Attention: Test ■ means that the parameter is not subject to production test. It was verified by design / characterization.

1 Electrical Characteristics

1.9 Sensor Multiplexer

Table 10 **Electrical Characteristics**

$V_{CC} = 3.135 \text{ V to } 3.465 \text{ V}$, $T_A = -40 \text{ °C to } 125 \text{ °C}$, application and MMIC external circuit acc. to Application Note AN359, all voltages with respect to ground (unless otherwise specified)

Parameter	Symbol	Values			Unit	Test	Note or Test Condition
		Min.	Typ.	Max.			
Input voltage range	V_{IN}	1	–	2	V	■	–
Input current	I_{IN}	–	–	1	μA	■	–
Output impedance	R_{OUT}	–	20	40	Ω	■	–
Offset voltage	V_{OFFSET}	-10	–	10	mV	■	At 10k Ω load resistance

Attention: **Test ■ means that the parameter is not subject to production test. It was verified by design / characterization.**

For more information on the sensor multiplexer refer to [Chapter 4](#) and to application note AN359.

2 Pin Description


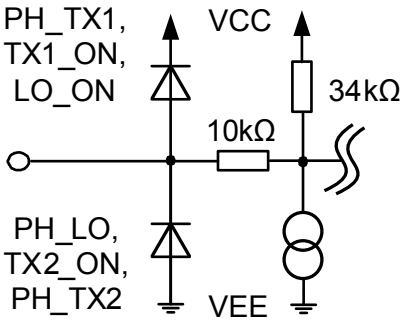
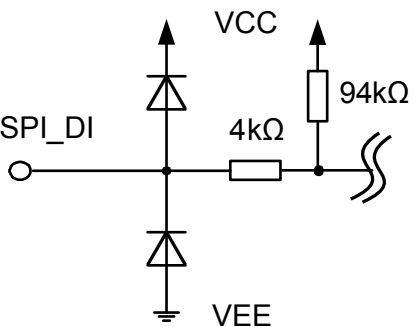
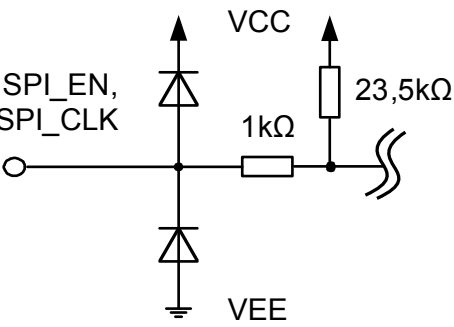
2 Pin Description

Table 11 Pin Definition and Function

Pin No.	Name	Function
1	PH_TX1	TX1 phase
2	TX1_ON	TX1 enable
3	LO_ON	LO enable
4	VEE	Ground
5	LO	LO RF output signal
6	VEE	Ground
7	VEE	Ground
8	PH_LO	LO phase
9	TX2_ON	TX2 enable
10	PH_TX2	TX2 phase
11	VEE	Ground
12	TX2	TX2 RF output signal
13	VEE	Ground
14	VCC	Supply voltage
15	DIV_DIS_OUT	Divider disable output
16	SPI_DO	SPI data output
17	DIVX	Divider output negative port
18	DIV	Divider output positive port
19	ANA_IN	Analog signal input
20	VCC_VCO	Supply voltage VCO
21	VEE	Ground
22	VTUNE_F	VCO tuning voltage (fine)
23	VTUNE_C	VCO tuning voltage (coarse)
24	VEE_VCO	Ground VCO
25	VCC	Supply voltage
26	SPI_EN	SPI enable
27	SPI_CLK	SPI clock
28	SPI_DI	SPI data input
29	ANA_OUT	Analog output signal
30	VEE	Ground
31	TX1	TX1 RF output signal
32	VEE	Ground

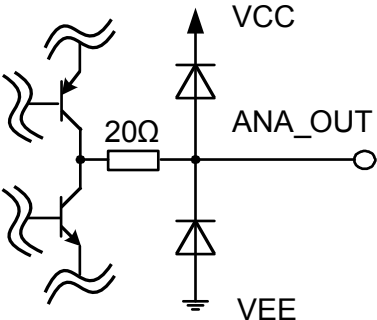
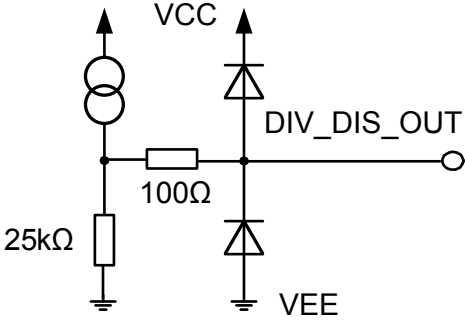
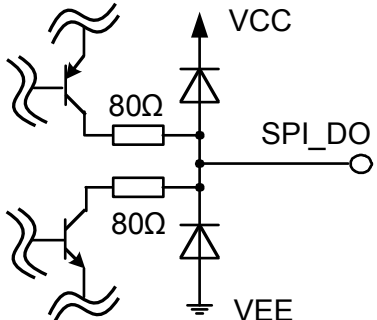

2 Pin Description

Table 12 I/O internal circuits

Pin No.	Name	I/O internal circuits
5, 12, 31	LO, TX2, TX1	 LO, TX2, TX1
1, 2, 3, 8, 9, 10	PH_TX1, TX1_ON, LO_ON, PH_LO, TX2_ON, PH_TX2	 PH_TX1, TX1_ON, LO_ON PH_LO, TX2_ON, PH_TX2
28	SPI_DI	 SPI_DI
26, 27	SPI_EN, SPI_CLK	 SPI_EN, SPI_CLK

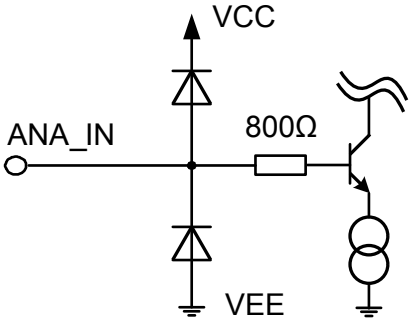
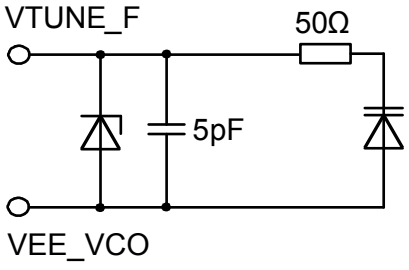
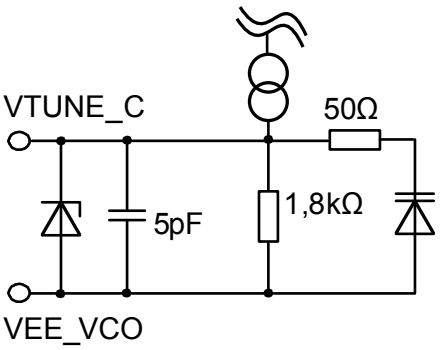
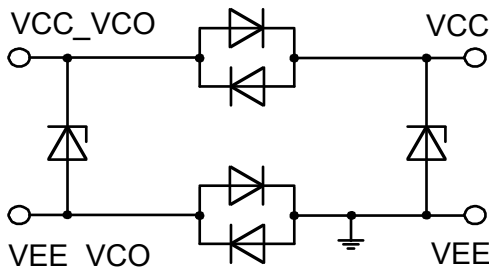
2 Pin Description

Table 12 I/O internal circuits (continued)

Pin No.	Name	I/O internal circuits
29	ANA_OUT	
15	DIV_DIS_OUT	
16	SPI_DO	
17, 18	DIVX, DIV	

2 Pin Description

Table 12 I/O internal circuits (continued)

Pin No.	Name	I/O internal circuits
19	ANA_IN	
22, 24	VTUNE_F, VEE_VCO	
23, 24	VTUNE_C, VEE_VCO	
4, 6, 7, 11, 13, 14, 20, 21, 24, 25, 30, 32	VEE, VCC, VCC_VCO, VEE_VCO,	

3 SPI

3 SPI

Communication to the transceiver is done via a Serial-Peripheral-Interface (SPI). The 32 bit SPI has a hardwired Power-On reset, which sets the output bits to a defined state after turning on the supply voltage. Data transmission is started by a negative edge on SPI_EN. Data at SPI_DI is then read at the falling edge of SPI_CLK. The most significant bit (MSB) is read first.

Table 13 SPI Data Bit Description

Data Bit	Name	Description (Logic High)	Power ON Reset State
0 (LSB)	TX1_A5	MSB of TX1 PGA DAC output power control	0
1	TX1_A4	TX1 PGA DAC output power control	0
2	TX1_A3	TX1 PGA DAC output power control	0
3	TX1_A2	TX1 PGA DAC output power control	0
4	TX1_A1	TX1 PGA DAC output power control	0
5	TX1_A0	LSB of TX1 PGA DAC output power control	0
6	TX1_EN_DAC	TX1 PGA DAC enable	0
7	LO_EN_DAC	LO PGA DAC enable	0
8	n.c.		0
9	n.c.		0
10	n.c.		0
11	n.c.		0
12	EN_BUF1	buffer amplifier BUF1 enable	0
13	n.c.		0
14	n.c.		0
15	n.c.		0
16	VCO_A5	MSB of coarse tune DAC	0
17	VCO_A4	VCO coarse tune DAC	0
18	VCO_A3	VCO coarse tune DAC	0
19	VCO_A2	VCO coarse tune DAC	0
20	VCO_A1	VCO coarse tune DAC	0
21	VCO_A0	LSB of VCO coarse tune DAC	0
22	EN_DAC_VCO	VCO coarse tune DAC enable	0
23	PH1_SPI_ON	Phase control TX1 via SPI	0
24	TX1_SEL1	TX1 control bit ("0"=via ext. pulse pin, "1"=via SPI)	0
25	TX1_SPI_ON	TX1 enable via SPI	0
26	LO_SPI_ON	LO enable via SPI	0
27	AMUX2_SEL0	AMUX2 control bit	0

3 SPI

Table 13 **SPI Data Bit Description (continued)**

Data Bit	Name	Description (Logic High)	Power ON Reset State
28	AMUX2_SEL1	AMUX2 control bit	0
29	AMUX2_SEL2	AMUX2 control bit	0
30	LO_SEL1	LO logic control bit	0
31	EN_BUF2	Buffer amplifier BUF2 enable	0
32	EN_DIV	Frequency divider enable	0
33	EN_VCO	VCO enable	0
34	AMUX1_SEL0	AMUX1 control bit	0
35	AMUX1_SEL1	AMUX1 control bit	0
36	n.c.		0
37	PHLO_SPI_ON	Phase control LO via SPI	0
38	PH2_SPI_ON	Phase control TX2 via SPI	0
39	PH_SEL1	Phase control bit ("0"=via ext. pulse pin, "1"=via SPI)	0
40	TX2_SEL1	TX2 control bit ("0"=via ext. pulse pin, "1"=via SPI)	0
41	TX2_SPI_ON	TX2 enable via SPI	0
42	AMUX3_SEL1	AMUX3 control bit	0
43	AMUX3_SEL0	AMUX3 control bit	0
44	n.c		0
45	LO_SEL0	LO control bit	0
46	n.c		0
47	n.c		0
48	TX2_A5	MSB of TX2 PGA DAC output power control	0
49	TX2_A4	TX2 PGA DAC output power control	0
50	TX2_A3	TX2 PGA DAC output power control	0
51	TX2_A2	TX2 PGA DAC output power control	0
52	TX2_A1	TX2 PGA DAC output power control	0
53	TX2_A0	LSB of TX2 PGA DAC output power control	0
54	TX2_EN_DAC	TX2 PGA DAC enable	0
55	LO_A5	MSB of LO PGA DAC output power control	0
56	LO_A4	LO PGA DAC output power control	0
57	LO_A3	LO PGA DAC output power control	0
58	LO_A2	LO PGA DAC output power control	0
59	LO_A1	LO PGA DAC output power control	0

4 Sensor Multiplexer

Table 14 **SPI Interface (continued)**

Parameter	Symbol	Values			Unit	Test
		Min.	Typ.	Max.		
Delay between rising edge of SPI_EN and SPI_DO tristate (leakage current < 12μA)	t_{SDOtri}	–	–	100	ns	■
Delay between falling edge of SPI_EN and MSB at SPI_DO tristate valid	t_{CSDV}	–	–	125	ns	■
Minimum time between two SPI commands	$t_{min2SPI}$	5	–	–	μs	■

Table 15 **Specification for SPI pins**

Parameter	Symbol	Values			Unit	Test
		Min.	Typ.	Max.		
High-level input voltage	V_{I_high}	2.0	–	–	V	■
Low-level input voltage	V_{I_low}	–	–	0.8	V	■
Input voltage hysteresis	V_{hys}	50	–	–	mV	■
Input current	I_{IN}	-190	–	150	μA	
Input capacitance (EN, CLK, DI)	CS_{IN}	–	–	2	pF	■
SPI_DO output high voltage (VCC=3.3V, I_{SDO} =1mA)	V_{O_high}	2.4	–	–	V	
SPI_DO output low voltage (VCC=3.3V, I_{SDO} =1mA)	V_{O_low}	–	–	0.8	V	
SPI_DO load capacitance	CS_{L_DO}	–	–	30	pF	■
SPI_DO load resistance	R_{SL_DO}	10	–	–	kΩ	■
Pull Up resistor (SPI_DI) $T_A = 25\text{ °C}$	RPL_SPI_DI	78	98	118	kΩ	■
Pull Up resistor (SPI_CLK, SPI_EN) $T_A = 25\text{ °C}$	RPL_SPI_CLK, RPL_SPI_EN	19.6	24.5	29.4	kΩ	■
Leakage current @ SPI_DO in high Z state (test voltage 2.4 V)	I_{L_DO}	–	–	12	μA	

Attention: **Test ■ means that the parameter is not subject to production test. It was verified by design / characterization.**

4 Sensor Multiplexer

Output signals of the temperature and output level sensors at TX1, TX2 and LO output are provided multiplexed at the output pin ANA_OUT using an analog multiplexer (AMUX) circuit.

5 LO Logic

Additionally, a MMIC internal reference voltage (VBG1) can be read out and an analog input signal within 1 V and 2 V can be directed from ANA_IN to ANA_OUT. Tristate capability is implemented in order to combine several analog outputs in the application. In this case it has to be ensured that only one multiplexer output is activated at any time.

For more information on the sensor multiplexer refer to application note AN359.

Table 16 Truth Table AMUX⁽¹⁾

Output at ANA_OUT	AMUX1_SEL1	AMUX1_SEL0	AMUX2_SEL2	AMUX2_SEL1	AMUX2_SEL0
Tristate	X	X	0	0	0
ANA_IN	X	X	0	0	1
VTEMP	X	X	0	1	1
PSENSE_TX2	0	0	1	0	0
PSENSE_TX1	0	1	1	0	0
PSENSE_LO	1	X	1	0	0
VBG1 (Bandgap output voltage)	X	X	1	0	1

(1) deviating states not allowed, undefined AMUX output

5 LO Logic

The BGT24AT2 accommodates a logic circuit which can be used to either activate the LO-output manually or automatically depending on the TX1/TX2 configuration.

Three operation modes are selectable:

1. manual activation / deactivation of the LO output via external pulse pin LO_ON
2. manual activation / deactivation of the LO output via SPI bit LO_SPI_ON
3. automatic activation / deactivation depending on the TX1 / TX2 configuration.

The configuration of the LO logic operation mode is shown in [Table 17](#).

Table 17 Truth Table LO Logic

LO_SEL1	LO_SEL0	Function
0	0	LO activation via external pulse pin LO_ON
0	1	LO activation via SPI bit LO_SPI_ON
1	X	Automatic LO activation via external pulse pins TX1_ON or TX2_ON

6 Package Dimensions

6 Package Dimensions

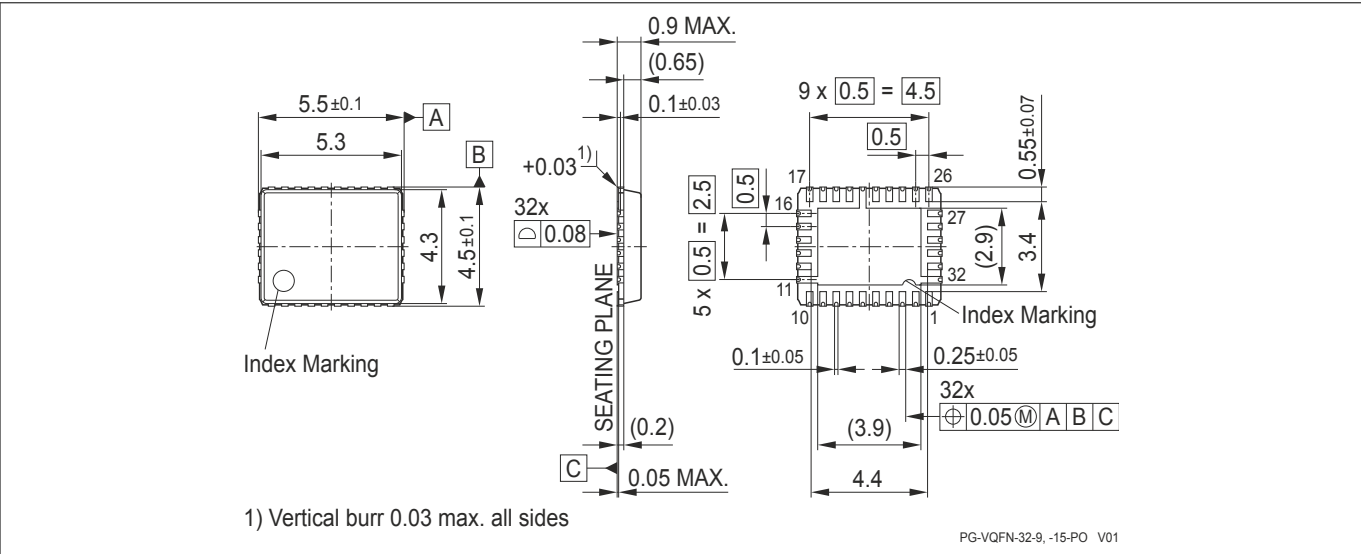


Figure 4 Package Outline (Top, Side and Bottom View) of VQFN32-9

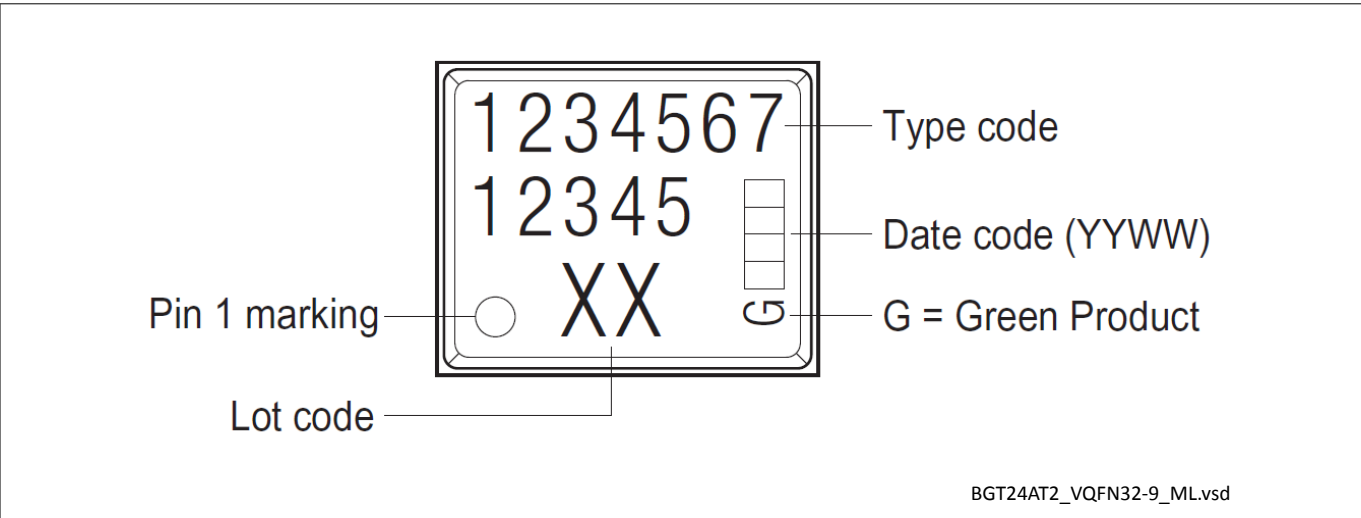


Figure 5 Marking Layout VQFN32-9 (example)

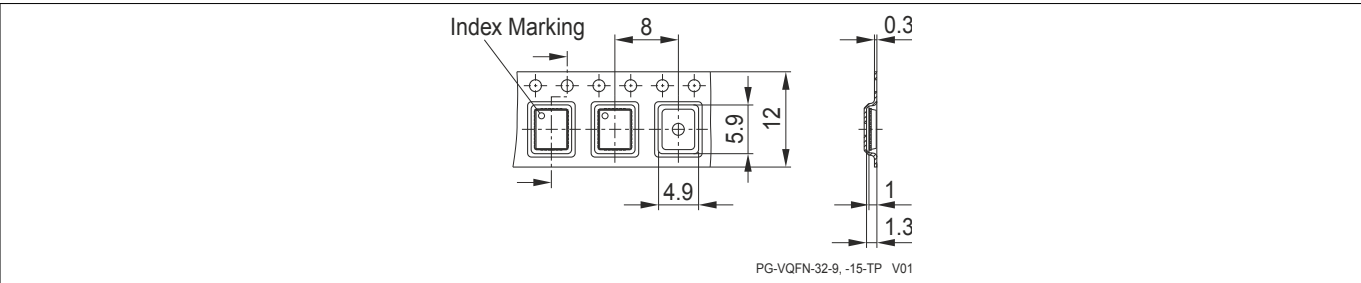


Figure 6 Tape of VQFN32-9, Ø Reel: 330 mm, Pieces / Reel: 3000, Reels / Box: 1

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2019-12-05

Published by
Infineon Technologies AG
81726 Munich, Germany

© 2020 Infineon Technologies AG
All Rights Reserved.

Do you have a question about any
aspect of this document?
Email: erratum@infineon.com

Document reference
IFX-uee1569827723653

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenhheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury