

# BGU6104

## Wideband silicon low-noise amplifier MMIC

Rev. 2 — 3 February 2012

Product data sheet

## 1. Product profile

### 1.1 General description

The BGU6104 MMIC is an unmatched wideband MMIC featuring an integrated bias, enable function and wide supply voltage. BGU6104 is part of family of three products (BGU6101, BGU6102 and BGU6104) and is optimized for 4 mA operation.

### 1.2 Features and benefits

- Supply voltage range from 1.5 V to 5 V
- Current range up to 40 mA at 3 V and 50 mA at 5 V supply voltage
- $NF_{min}$  of 0.8 dB
- Applicable between 40 MHz and 4 GHz
- Integrated temperature stabilized bias for easy design
- Bias current configurable with external resistor
- Power-down mode current consumption < 6  $\mu$ A
- ESD protection on all pins up to 3 kV HBM
- Small 6-pin leadless package 2.0 mm  $\times$  1.3 mm  $\times$  0.35 mm

### 1.3 Applications

- FM radio
- Mobile TV, CMMB
- ISM
- Wireless security
- RKE, TPMS
- AMR, ZigBee, Bluetooth
- WiFi, WLAN(2.4 GHz)
- Low current applications

### 1.4 Quick reference data

**Table 1. Quick reference data**

$T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $V_{CC} = 3.0\text{ V}$ ;  $I_{CC(tot)} = 6.0\text{ mA}$ ;  $V_{ENABLE} \geq 1.2\text{ V}$  unless otherwise specified. All measurements done on characterization board without matching, de-embedded up to the pins.

| Symbol       | Parameter            | Conditions                                 | Min | Typ  | Max | Unit |
|--------------|----------------------|--|-----|------|-----|------|
| $ S_{21} ^2$ | insertion power gain | f = 450 MHz                                | -   | 22.5 | -   | dB   |
|              |                      | f = 900 MHz                                | -   | 18.5 | -   | dB   |
|              |                      | f = 2400 MHz; $I_{CC(tot)} = 12\text{ mA}$ | -   | 12.8 | -   | dB   |
| $NF_{min}$   | minimum noise figure | f = 450 MHz                                | -   | 0.8  | -   | dB   |
|              |                      | f = 900 MHz                                | -   | 0.8  | -   | dB   |
|              |                      | f = 2400 MHz; $I_{CC(tot)} = 12\text{ mA}$ | -   | 1.1  | -   | dB   |




**Table 1.** Quick reference data ...continued

$T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $V_{CC} = 3.0\text{ V}$ ;  $I_{CC(tot)} = 6.0\text{ mA}$ ;  $V_{ENABLE} \geq 1.2\text{ V}$  unless otherwise specified. All measurements done on characterization board without matching, de-embedded up to the pins.

| Symbol       | Parameter                             | Conditions   | Min | Typ  | Max | Unit |
|--------------|---------------------------------------|--|-----|------|-----|------|
| $P_{L(1dB)}$ | output power at 1 dB gain compression | $f = 450\text{ MHz}$                                 | -   | 0.5  | -   | dBm  |
|              |                                       | $f = 900\text{ MHz}$                                 | -   | 0.5  | -   | dBm  |
|              |                                       | $f = 2400\text{ MHz}$ ; $I_{CC(tot)} = 12\text{ mA}$ | -   | 6.5  | -   | dBm  |
| $IP3_O$      | output third-order intercept point    | $f = 450\text{ MHz}$                                 | -   | 11   | -   | dBm  |
|              |                                       | $f = 900\text{ MHz}$                                 | -   | 12   | -   | dBm  |
|              |                                       | $f = 2400\text{ MHz}$ ; $I_{CC(tot)} = 12\text{ mA}$ | -   | 18.5 | -   | dBm  |

## 2. Pinning information

### 2.1 Pinning



Transparent top view

**Fig 1.** Pin configuration

### 2.2 Pin description

**Table 2.** Pin description

| Symbol   | Pin | Description                  |
|----------|-----|------------------------------|
| $V_{CC}$ | 1   | supply voltage               |
| n.c.     | 2   | not connected                |
| RF_IN    | 3   | RF in                        |
| RF_OUT   | 4   | RF out                       |
| ENABLE   | 5   | enable                       |
| CUR_ADJ  | 6   | current adjust               |
| GND      | GND | ground pad; RF and DC ground |

## 3. Ordering information

**Table 3.** Ordering information

| Type number | Package |  |         |
|-------------|---------|--|---------|
|             | Name    | Description  | Version |
| BGU6104     | HXSON6  | plastic thermal enhanced super thin small outline package; no leads; 6 terminals; body 2 x 1.3 x 0.35 mm | SOT1209 |

## 4. Marking

Table 4. Marking

| Type number | Marking | Description               |
|-------------|---------|---------------------------|
| BGU6104     | 1C*     | * = p : made in Hong Kong |
|             |         | * = t : made in Malaysia  |
|             |         | * = W : made in China     |

## 5. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

| Symbol        | Parameter                       | Conditions   | Min      | Max            | Unit |
|---------------|---------------------------------|--|----------|----------------|------|
| $V_{CC}$      | supply voltage                  | RF input AC coupled  | -        | 5.5            | V    |
| $V_{ENABLE}$  | voltage on pin ENABLE           |  | [1] -0.5 | $V_{CC} + 1.8$ | V    |
| $V_{RF\_IN}$  | voltage on pin IN               | DC   | [2] -0.5 | 0.9            | V    |
| $V_{RF\_OUT}$ | voltage on pin RF_OUT           | DC   | -0.5     | $V_{CC} + 1.8$ | V    |
| $I_{CC(tot)}$ | total supply current            | $V_{CC} = 5.0$ V   | -        | 50             | mA   |
| $T_{stg}$     | storage temperature             |  | -55      | +150           | °C   |
| $T_j$         | junction temperature            |  | -        | +150           | °C   |
| $V_{ESD}$     | electrostatic discharge voltage | Human Body Model (HBM);<br>According JEDEC standard 22-A114E     | -        | 3000           | V    |
|               |                                 | Charged Device Model (CDM);<br>According JEDEC standard 22-C101B | -        | 500            | V    |

[1] Due to internal ESD diode protection, the applied voltage should not exceed the specified maximum in order to avoid excess current.

[2] The RF input is directly coupled to the base of the RF transistor.

## 6. Thermal characteristics

Table 6. Thermal characteristics

| Symbol         | Parameter  | Conditions | Typ | Unit |
|----------------|--|------------|-----|------|
| $R_{th(j-sp)}$ | thermal resistance from junction to solder point |            | 110 | K/W  |

## 7. Static characteristics

**Table 7. Static characteristics**

| Symbol        | Parameter            | Conditions                     | Min        | Typ | Max  | Unit |
|---------------|----------------------|--------------------------------|------------|-----|------|------|
| $V_{CC}$      | supply voltage       | RF input AC coupled            | 1.5        | -   | 5.0  | V    |
| $I_{CC(tot)}$ | total supply current | $V_{CC} = 3.0\text{ V}$        | [1][2] 3.7 | -   | 40   | mA   |
|               |                      | $V_{ENABLE} \leq 0.4\text{ V}$ | [1] -      | -   | 0.01 | mA   |
| $T_{amb}$     | ambient temperature  |                                | -40        | +25 | +85  | °C   |

[1]  $I_{CC(tot)} = I_{CC} + I_{RF\_OUT} + I_{R\_BIAS}$ .

[2] Configurable with external resistor.

## 8. Dynamic characteristics

**Table 8. Dynamic characteristics**

$T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $V_{CC} = 3.0\text{ V}$ ;  $V_{ENABLE} \geq 1.2\text{ V}$  unless otherwise specified. All measurements done on characterization board without matching, de-embedded up to the pins.

| Symbol                   | Parameter                             | Conditions                   | Min | Typ  | Max | Unit |
|--------------------------|---------------------------------------|------------------------------|-----|------|-----|------|
| <b>100 MHz frequency</b> |                                       |                              |     |      |     |      |
| $ S_{21} ^2$             | insertion power gain                  | $f = 100\text{ MHz}$         |     |      |     |      |
|                          |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 21.5 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 25.0 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 29.5 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 32.0 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 35.0 | -   | dB   |
| MSG                      | maximum stable gain                   | $f = 100\text{ MHz}$         |     |      |     |      |
|                          |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 29.5 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 31.0 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 33.5 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 35.5 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 37.5 | -   | dB   |
| $NF_{min}$               | minimum noise figure                  | $f = 100\text{ MHz}$         |     |      |     |      |
|                          |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 0.8  | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 0.8  | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 0.8  | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 0.9  | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 1.2  | -   | dB   |
| $P_{L(1dB)}$             | output power at 1 dB gain compression | $f = 100\text{ MHz}$         |     |      |     |      |
|                          |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | -1.0 | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 1.0  | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 6.0  | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 9.5  | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 15.0 | -   | dBm  |
| $IP3_O$                  | output third-order intercept point    | $f = 100\text{ MHz}$         |     |      |     |      |
|                          |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 9.5  | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 11.5 | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 16.0 | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 19.5 | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 26.0 | -   | dBm  |

**Table 8. Dynamic characteristics ...continued**

$T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $V_{CC} = 3.0\text{ V}$ ;  $V_{ENABLE} \geq 1.2\text{ V}$  unless otherwise specified. All measurements done on characterization board without matching, de-embedded up to the pins.

| Symbol                   | Parameter                             | Conditions                   | Min | Typ  | Max | Unit |
|--------------------------|---------------------------------------|------------------------------|-----|------|-----|------|
| <b>150 MHz frequency</b> |                                       |                              |     |      |     |      |
| $ S_{21} ^2$             | insertion power gain                  | f = 150 MHz                  |     |      |     |      |
|                          |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 21.5 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 24.5 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 29.0 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 31.5 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 34.0 | -   | dB   |
| MSG                      | maximum stable gain                   | f = 150 MHz                  |     |      |     |      |
|                          |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 27.5 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 29.0 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 32.0 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 33.5 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 35.5 | -   | dB   |
| NF <sub>min</sub>        | minimum noise figure                  | f = 150 MHz                  |     |      |     |      |
|                          |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 0.8  | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 0.8  | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 0.8  | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 0.9  | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 1.2  | -   | dB   |
| P <sub>L(1dB)</sub>      | output power at 1 dB gain compression | f = 150 MHz                  |     |      |     |      |
|                          |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | -1.0 | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 1.0  | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 5.5  | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 9.0  | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 15.0 | -   | dBm  |
| IP <sub>3O</sub>         | output third-order intercept point    | f = 150 MHz                  |     |      |     |      |
|                          |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 9.5  | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 11.5 | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 16.0 | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 19.5 | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 26.0 | -   | dBm  |

**Table 8. Dynamic characteristics ...continued**

$T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $V_{CC} = 3.0\text{ V}$ ;  $V_{ENABLE} \geq 1.2\text{ V}$  unless otherwise specified. All measurements done on characterization board without matching, de-embedded up to the pins.

| Symbol                   | Parameter                             | Conditions                   | Min | Typ  | Max | Unit |
|--------------------------|---------------------------------------|------------------------------|-----|------|-----|------|
| <b>450 MHz frequency</b> |                                       |                              |     |      |     |      |
| $ S_{21} ^2$             | insertion power gain                  | f = 450 MHz                  |     |      |     |      |
|                          |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 20.0 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 22.5 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 25.5 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 27.5 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 28.5 | -   | dB   |
| MSG                      | maximum stable gain                   | f = 450 MHz                  |     |      |     |      |
|                          |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 23.0 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 24.5 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 27.0 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 29.0 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 30.5 | -   | dB   |
| NF <sub>min</sub>        | minimum noise figure                  | f = 450 MHz                  |     |      |     |      |
|                          |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 0.8  | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 0.8  | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 0.8  | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 0.9  | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 1.2  | -   | dB   |
| P <sub>L(1dB)</sub>      | output power at 1 dB gain compression | f = 450 MHz                  |     |      |     |      |
|                          |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | -2.0 | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 0.5  | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 5.5  | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 10.0 | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 15.5 | -   | dBm  |
| IP <sub>3O</sub>         | output third-order intercept point    | f = 450 MHz                  |     |      |     |      |
|                          |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 9.0  | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 11.0 | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 17.0 | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 20.5 | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 26.0 | -   | dBm  |

**Table 8. Dynamic characteristics ...continued**

$T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $V_{CC} = 3.0\text{ V}$ ;  $V_{ENABLE} \geq 1.2\text{ V}$  unless otherwise specified. All measurements done on characterization board without matching, de-embedded up to the pins.

| Symbol                   | Parameter                             | Conditions                   | Min | Typ  | Max | Unit |
|--------------------------|---------------------------------------|------------------------------|-----|------|-----|------|
| <b>900 MHz frequency</b> |                                       |                              |     |      |     |      |
| $ S_{21} ^2$             | insertion power gain                  | f = 900 MHz                  |     |      |     |      |
|                          |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 16.5 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 18.5 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 21.0 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 22.5 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 23.0 | -   | dB   |
| MSG                      | maximum stable gain                   | f = 900 MHz                  |     |      |     |      |
|                          |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 20.0 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 21.5 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 24.0 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 25.5 | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 27.5 | -   | dB   |
| $NF_{min}$               | minimum noise figure                  | f = 900 MHz                  |     |      |     |      |
|                          |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 0.9  | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 0.8  | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 0.8  | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 0.9  | -   | dB   |
|                          |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 1.1  | -   | dB   |
| $P_{L(1dB)}$             | output power at 1 dB gain compression | f = 900 MHz                  |     |      |     |      |
|                          |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | -2.0 | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 0.5  | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 6.0  | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 10.5 | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 16.0 | -   | dBm  |
| $IP3_O$                  | output third-order intercept point    | f = 900 MHz                  |     |      |     |      |
|                          |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 9.5  | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 12.0 | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 18.0 | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 21.5 | -   | dBm  |
|                          |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 24.0 | -   | dBm  |



**Table 8. Dynamic characteristics ...continued**

$T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $V_{CC} = 3.0\text{ V}$ ;  $V_{ENABLE} \geq 1.2\text{ V}$  unless otherwise specified. All measurements done on characterization board without matching, de-embedded up to the pins.

| Symbol                    | Parameter                             | Conditions                   | Min | Typ  | Max | Unit |
|---------------------------|---------------------------------------|------------------------------|-----|------|-----|------|
| <b>1500 MHz frequency</b> |                                       |                              |     |      |     |      |
| $ S_{21} ^2$              | insertion power gain                  | f = 1500 MHz                 |     |      |     |      |
|                           |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 13.0 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 14.5 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 17.0 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 18.0 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 19.0 | -   | dB   |
| MSG                       | maximum stable gain                   | f = 1500 MHz                 |     |      |     |      |
|                           |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 18.0 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 19.5 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 22.0 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 23.0 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 24.5 | -   | dB   |
| NF <sub>min</sub>         | minimum noise figure                  | f = 1500 MHz                 |     |      |     |      |
|                           |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 0.9  | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 0.9  | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 0.9  | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 1.0  | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 1.1  | -   | dB   |
| P <sub>L(1dB)</sub>       | output power at 1 dB gain compression | f = 1500 MHz                 |     |      |     |      |
|                           |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | -1.5 | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 1.0  | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 6.5  | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 11.0 | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 16.5 | -   | dBm  |
| IP <sub>3O</sub>          | output third-order intercept point    | f = 1500 MHz                 |     |      |     |      |
|                           |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 10.0 | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 13.0 | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 18.5 | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 20.0 | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 22.0 | -   | dBm  |

**Table 8. Dynamic characteristics ...continued**

$T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $V_{CC} = 3.0\text{ V}$ ;  $V_{ENABLE} \geq 1.2\text{ V}$  unless otherwise specified. All measurements done on characterization board without matching, de-embedded up to the pins.

| Symbol                    | Parameter                             | Conditions                   | Min | Typ  | Max | Unit |
|---------------------------|---------------------------------------|------------------------------|-----|------|-----|------|
| <b>1900 MHz frequency</b> |                                       |                              |     |      |     |      |
| $ S_{21} ^2$              | insertion power gain                  | f = 1900 MHz                 |     |      |     |      |
|                           |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 11.0 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 12.5 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 15.0 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 16.0 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 16.5 | -   | dB   |
| MSG                       | maximum stable gain                   | f = 1900 MHz                 |     |      |     |      |
|                           |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 17.0 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 18.5 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 20.5 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 22.0 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 23.0 | -   | dB   |
| NF <sub>min</sub>         | minimum noise figure                  | f = 1900 MHz                 |     |      |     |      |
|                           |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 1.1  | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 1.0  | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 1.0  | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 1.0  | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 1.2  | -   | dB   |
| P <sub>L(1dB)</sub>       | output power at 1 dB gain compression | f = 1900 MHz                 |     |      |     |      |
|                           |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | -1.5 | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 1.5  | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 7.0  | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 11.5 | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 16.5 | -   | dBm  |
| IP <sub>3O</sub>          | output third-order intercept point    | f = 1900 MHz                 |     |      |     |      |
|                           |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 9.5  | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 12.5 | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 18.0 | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 20.0 | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 21.0 | -   | dBm  |

**Table 8. Dynamic characteristics ...continued**

$T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $V_{CC} = 3.0\text{ V}$ ;  $V_{ENABLE} \geq 1.2\text{ V}$  unless otherwise specified. All measurements done on characterization board without matching, de-embedded up to the pins.

| Symbol                    | Parameter                             | Conditions                   | Min | Typ  | Max | Unit |
|---------------------------|---------------------------------------|------------------------------|-----|------|-----|------|
| <b>2400 MHz frequency</b> |                                       |                              |     |      |     |      |
| $ S_{21} ^2$              | insertion power gain                  | f = 2400 MHz                 |     |      |     |      |
|                           |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 9.0  | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 10.5 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 12.5 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 13.5 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 14.5 | -   | dB   |
| MSG                       | maximum stable gain                   | f = 2400 MHz                 |     |      |     |      |
|                           |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 16.0 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 17.5 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 19.5 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 20.5 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 21.0 | -   | dB   |
| NF <sub>min</sub>         | minimum noise figure                  | f = 2400 MHz                 |     |      |     |      |
|                           |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 1.4  | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 1.2  | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 1.1  | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 1.2  | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 1.4  | -   | dB   |
| P <sub>L(1dB)</sub>       | output power at 1 dB gain compression | f = 2400 MHz                 |     |      |     |      |
|                           |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | -1.5 | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 1.0  | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 6.5  | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 11.0 | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 16.0 | -   | dBm  |
| IP <sub>3O</sub>          | output third-order intercept point    | f = 2400 MHz                 |     |      |     |      |
|                           |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 9.0  | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 11.0 | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 18.5 | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 20.0 | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 21.0 | -   | dBm  |

**Table 8. Dynamic characteristics ...continued**


$T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $V_{CC} = 3.0\text{ V}$ ;  $V_{ENABLE} \geq 1.2\text{ V}$  unless otherwise specified. All measurements done on characterization board without matching, de-embedded up to the pins.

| Symbol                    | Parameter                             | Conditions                   | Min | Typ  | Max | Unit |
|---------------------------|---------------------------------------|------------------------------|-----|------|-----|------|
| <b>3500 MHz frequency</b> |                                       |                              |     |      |     |      |
| $ S_{21} ^2$              | insertion power gain                  | f = 3500 MHz                 |     |      |     |      |
|                           |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 5.0  | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 7.0  | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 9.0  | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 10.0 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 10.5 | -   | dB   |
| MSG                       | maximum stable gain                   | f = 3500 MHz                 |     |      |     |      |
|                           |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 15.0 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 16.0 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 16.0 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 16.0 | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 16.5 | -   | dB   |
| NF <sub>min</sub>         | minimum noise figure                  | f = 3500 MHz                 |     |      |     |      |
|                           |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 2.2  | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 2.1  | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 1.9  | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 1.9  | -   | dB   |
|                           |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 2.0  | -   | dB   |
| P <sub>L(1dB)</sub>       | output power at 1 dB gain compression | f = 3500 MHz                 |     |      |     |      |
|                           |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | -2.5 | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 0.0  | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 5.0  | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 9.0  | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 13.0 | -   | dBm  |
| IP <sub>3O</sub>          | output third-order intercept point    | f = 3500 MHz                 |     |      |     |      |
|                           |                                       | $I_{CC(tot)} = 4\text{ mA}$  | -   | 9.0  | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 6\text{ mA}$  | -   | 12.0 | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 12\text{ mA}$ | -   | 17.0 | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 20\text{ mA}$ | -   | 18.0 | -   | dBm  |
|                           |                                       | $I_{CC(tot)} = 40\text{ mA}$ | -   | 22.0 | -   | dBm  |

9. Enable control


Table 9. ENABLE (pin 5)  
 $-40\text{ }^{\circ}\text{C} \leq T_{\text{amb}} \leq +85\text{ }^{\circ}\text{C}$

| $V_{\text{ENABLE}}\text{ (V)}$ | State |
|--------------------------------|-------|
| $\leq 0.4$                     | OFF   |
| $\geq 1.2$                     | ON    |

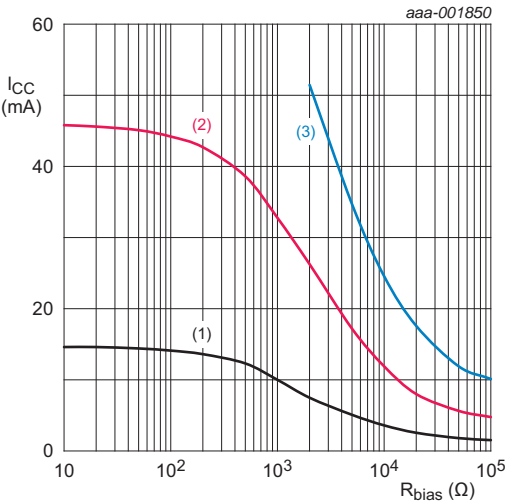


$T_{\text{amb}} = 25\text{ }^{\circ}\text{C}$ .  
(1)  $V_{\text{CC}} = 1.5\text{ V}$   
(2)  $V_{\text{CC}} = 3\text{ V}$   
(3)  $V_{\text{CC}} = 5\text{ V}$

Fig 2. Supply current as a function of bias resistor; typical values

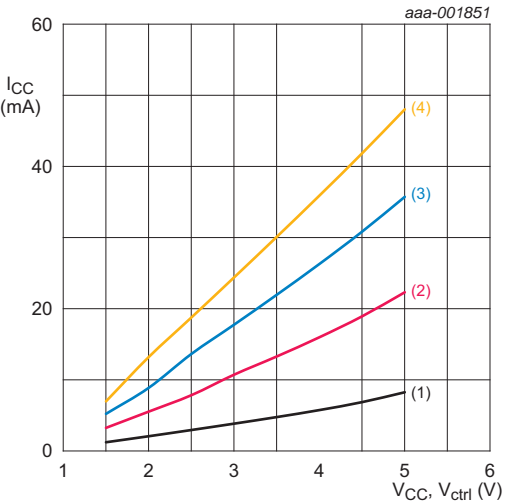

$T_{\text{amb}} = 25\text{ }^{\circ}\text{C}$ .  
(1)  $R_{\text{bias}} = \text{OPEN}$   
(2)  $R_{\text{bias}} = 12\text{ k}\Omega$   
(3)  $R_{\text{bias}} = 4.7\text{ k}\Omega$   
(4)  $R_{\text{bias}} = 2.4\text{ k}\Omega$


Fig 3. Supply current as a function of supply voltage and control voltage; typical values

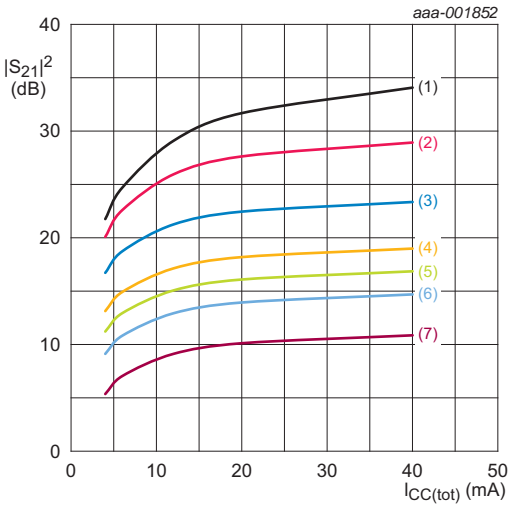

$T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $V_{CC} = 3\text{ V}$ ;  $P_i = -30\text{ dBm}$ .

- (1)  $f = 150\text{ MHz}$
- (2)  $f = 450\text{ MHz}$
- (3)  $f = 900\text{ MHz}$
- (4)  $f = 1500\text{ MHz}$
- (5)  $f = 1900\text{ MHz}$
- (6)  $f = 2400\text{ MHz}$
- (7)  $f = 3500\text{ MHz}$


**Fig 4.** Insertion power gain ( $|S_{21}|^2$ ) as a function of total supply current; typical values

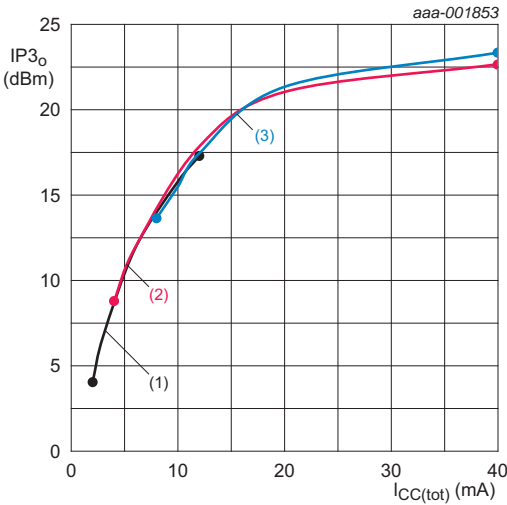

$T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $f_1 = 900\text{ MHz}$ ;  $f_2 = 900.2\text{ MHz}$ ;  $P_i = -30\text{ dBm}$ .


- (1)  $V_{CC} = 1.5\text{ V}$
- (2)  $V_{CC} = 3\text{ V}$
- (3)  $V_{CC} = 5\text{ V}$

**Fig 5.** Output third-order intercept point as a function of total supply current; typical values

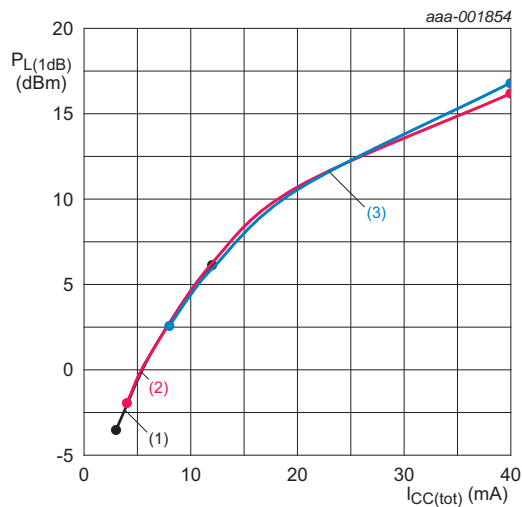


$T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $f = 900\text{ MHz}$ .  
(1)  $V_{CC} = 1.5\text{ V}$   
(2)  $V_{CC} = 3\text{ V}$   
(3)  $V_{CC} = 5\text{ V}$

**Fig 6. Output power at 1 dB gain compression as a function of total supply current; typical values**

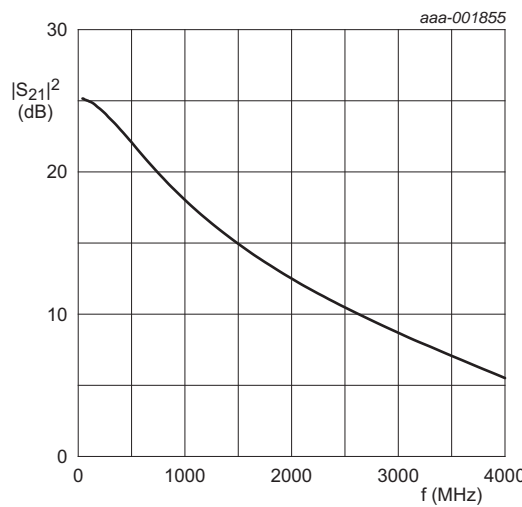

$T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $I_{CC(tot)} = 6\text{ mA}$ ;  $V_{CC} = 3\text{ V}$ ;  $P_i = -30\text{ dBm}$ .

**Fig 7. Insertion power gain ( $|S_{21}|^2$ ) as a function of frequency; typical values**

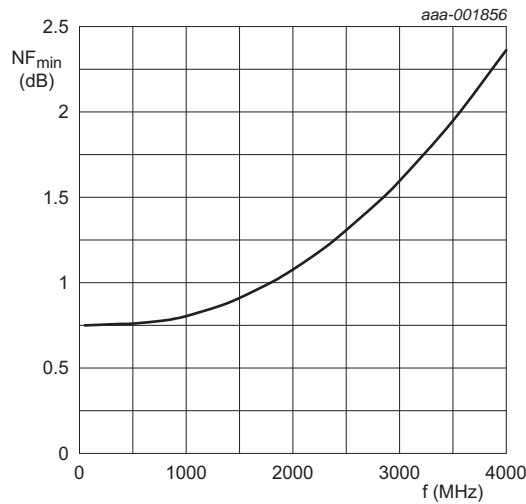

$T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $I_{CC(tot)} = 6\text{ mA}$ ;  $V_{CC} = 3\text{ V}$ .

**Fig 8. Minimum noise figure as a function of frequency; typical values**

10. Package outline

HXSON6: plastic thermal enhanced super thin small outline package; no leads;  
6 terminals; body 2 x 1.3 x 0.35 mm

SOT1209

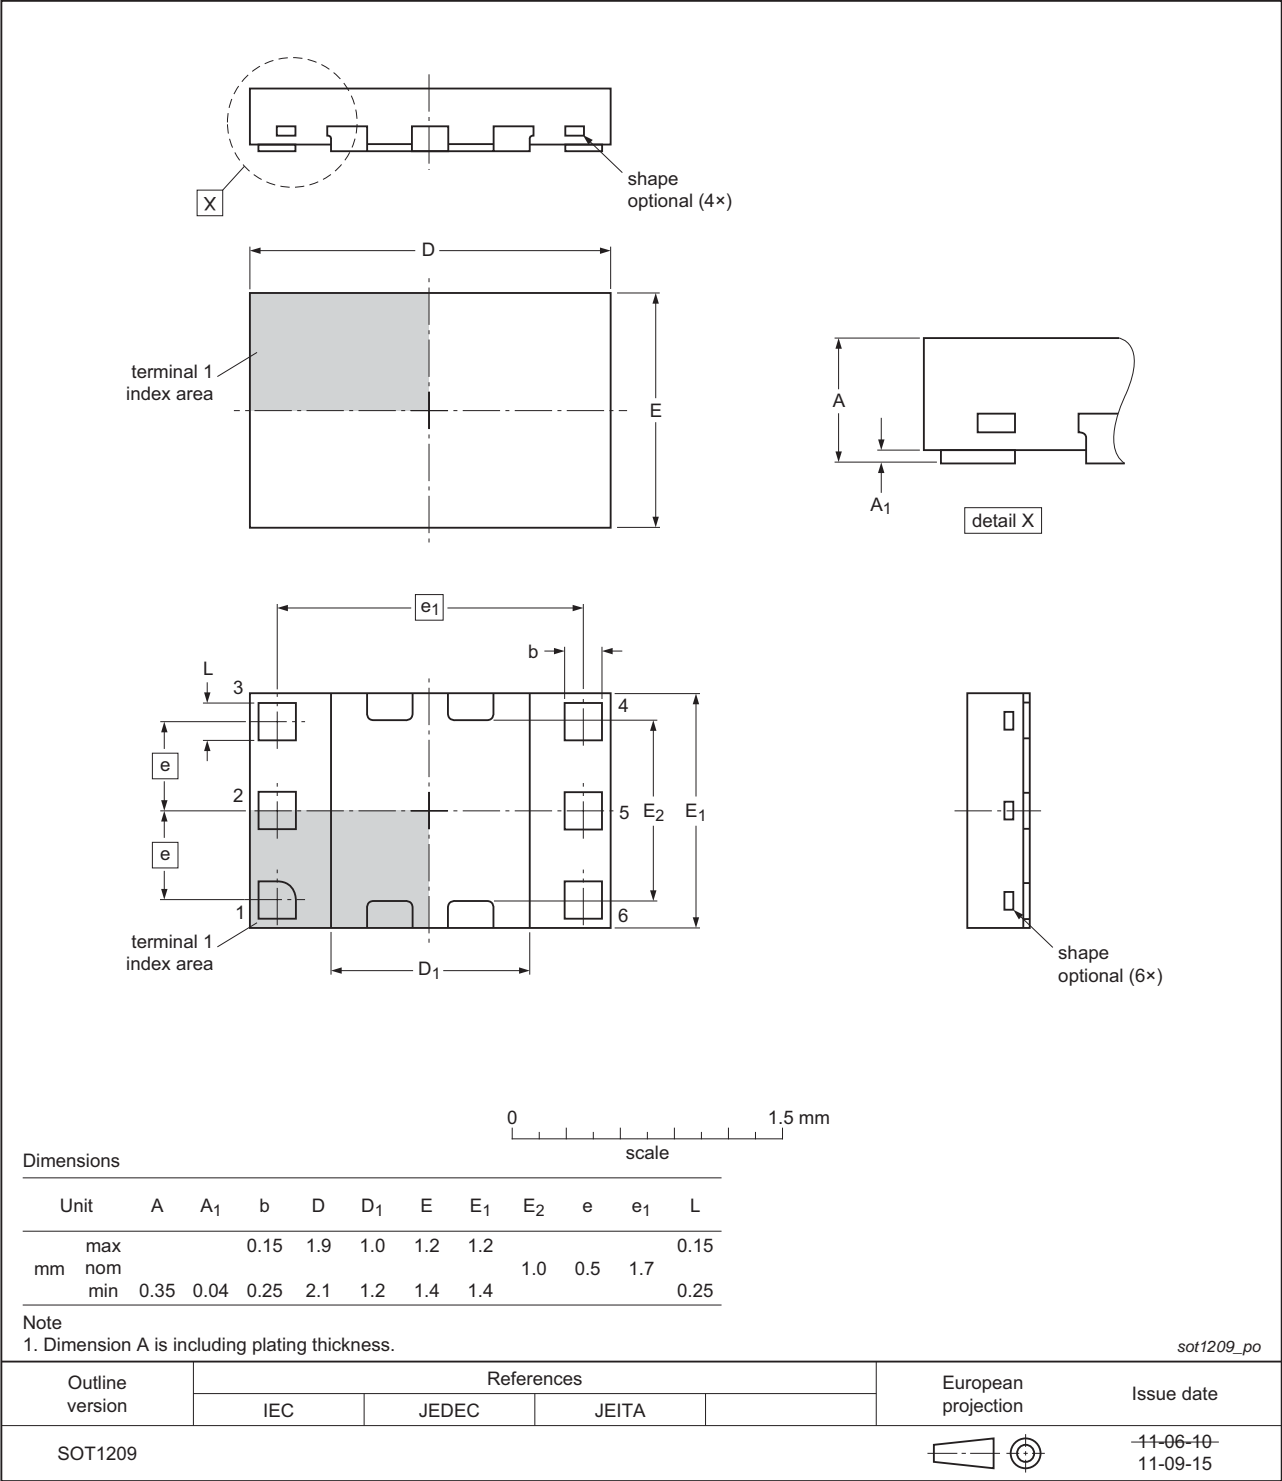


Fig 9. Package outline SOT1209



## 11. Abbreviations

**Table 10. Abbreviations**

| Acronym | Description                             |
|---------|---|
| AC      | Alternating Current                     |
| AMR     | Automated Meter Reading                 |
| CMMB    | China Mobile Multimedia Broadcasting    |
| DC      | Direct Current                          |
| ESD     | ElectroStatic Discharge                 |
| FM      | Frequency Modulation                    |
| ISM     | Industrial Scientific Medical           |
| MMIC    | Monolithic Microwave Integrated Circuit |
| RF      | Radio Frequency                         |
| RKE     | Remote Keyless Entry                    |
| TPMS    | Tire-Pressure Monitoring System         |
| WLAN    | Wireless Local Area Network             |

## 12. Revision history

**Table 11. Revision history**

| Document ID    | Release date   | Data sheet status      | Change notice | Supersedes  |
|----------------|--|------------------------|---------------|-------------|
| BGU6104 v.2    | 20120203   | Product data sheet     | -             | BGU6104 v.1 |
| Modifications: | <ul style="list-style-type: none"><li><a href="#">Section 1 on page 1</a>, <a href="#">Table 2 on page 2</a>, <a href="#">Table 3 on page 2</a>, <a href="#">Table 5 on page 3</a>, <a href="#">Table 8 on page 5</a>: Updated</li><li><a href="#">Section 9 on page 13</a>: Added figures</li></ul> |                        |               |             |
| BGU6104 v.1    | 20110921   | Preliminary data sheet | -             | -           |

## 13. Legal information

### 13.1 Data sheet status

| Document status <sup>[1][2]</sup> | Product status <sup>[3]</sup> | Definition  |
|-----------------------------------|-------------------------------|---|
| Objective [short] data sheet      | Development                   | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet    | Qualification                 | This document contains data from the preliminary specification.                       |
| Product [short] data sheet        | Production                    | This document contains the product specification.                                     |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

### 13.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### 13.3 Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any

liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

## 13.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## 14. Contact information

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

## 15. Contents

|           |  |           |
|-----------|--|-----------|
| <b>1</b>  | <b>Product profile</b> . . . . .         | <b>1</b>  |
| 1.1       | General description . . . . .            | 1         |
| 1.2       | Features and benefits . . . . .          | 1         |
| 1.3       | Applications . . . . .                   | 1         |
| 1.4       | Quick reference data . . . . .           | 1         |
| <b>2</b>  | <b>Pinning information</b> . . . . .     | <b>2</b>  |
| 2.1       | Pinning . . . . .                        | 2         |
| 2.2       | Pin description . . . . .                | 2         |
| <b>3</b>  | <b>Ordering information</b> . . . . .    | <b>2</b>  |
| <b>4</b>  | <b>Marking</b> . . . . .                 | <b>3</b>  |
| <b>5</b>  | <b>Limiting values</b> . . . . .         | <b>3</b>  |
| <b>6</b>  | <b>Thermal characteristics</b> . . . . . | <b>3</b>  |
| <b>7</b>  | <b>Static characteristics</b> . . . . .  | <b>4</b>  |
| <b>8</b>  | <b>Dynamic characteristics</b> . . . . . | <b>5</b>  |
| <b>9</b>  | <b>Enable control</b> . . . . .          | <b>13</b> |
| <b>10</b> | <b>Package outline</b> . . . . .         | <b>16</b> |
| <b>11</b> | <b>Abbreviations</b> . . . . .           | <b>17</b> |
| <b>12</b> | <b>Revision history</b> . . . . .        | <b>17</b> |
| <b>13</b> | <b>Legal information</b> . . . . .       | <b>18</b> |
| 13.1      | Data sheet status . . . . .              | 18        |
| 13.2      | Definitions . . . . .                    | 18        |
| 13.3      | Disclaimers . . . . .                    | 18        |
| 13.4      | Trademarks . . . . .                     | 19        |
| <b>14</b> | <b>Contact information</b> . . . . .     | <b>19</b> |
| <b>15</b> | <b>Contents</b> . . . . .                | <b>20</b> |

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP B.V. 2012.

All rights reserved.

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

Date of release: 3 February 2012

Document identifier: BGU6104