



Standard LED Lamps Round Types

Package	Part No.	Chip		Lens Appearance	Absolute Maximum Ratings				Electro-optical Data(At 20mA)			Viewing Angle 2θ 1/2 (deg)	Drawing No.
		Material/ Emitted Color	Peak Wave Length λp (nm)		Δλ (nm)	Pd (mw)	If (mA)	Peak (mA)	Vf (V)		Iv (mcd)		
									Typ	Max	Typ.		
T1 3/4 Narrow Viewing Angle 1.0" Lead 5.2φ	BL-B5137B	GaP/GaP/ Bright Red	700	Red Diffused	90	40	15	50	2.2	2.6	7.0	40	L-056
	BL-B4537B	GaAsP/GaP/ Hi-Eff Red	635		45	80	30	150	2.0	2.6	90.0		
	BL-B2137B	GaP/GaP/ Green	568	Green Diffused	30	80	30	150	2.2	2.6	90.0		
	BL-B3137B	GaAsP/GaP/ Yellow	585	Yellow Diffused	35	80	30	150	2.1	2.6	80.0		
	BL-B4137B	GaAsP/GaP/ Orange	635	Orange Diffused	45	80	30	150	2.0	2.6	90.0		
	BL-B9137B	GaP/GaP / Pure Green	555	Green Diffused	25	80	30	150	2.2	2.6	2.0		
T1 3/4 Flangeless 1.0" Lead 5.0φ	BL-B4537D	GaAsP/GaP / Hi-Eff Red	635	Red Diffused	45	80	30	150	2.0	2.6	90.0	35	L-057
	BL-B2137D	GaP/GaP/ Green	568	Green Diffused	30	80	30	150	2.2	2.6	90.0		
	BL-B3137D	GaAsP/GaP/ Yellow	585	Yellow Diffused	35	80	30	150	2.1	2.6	80.0		
	BL-B4537D	GaAsP/GaP/ Hi-Eff Red	635	Water Clear	45	80	30	150	2.0	2.6	90.0	20	
	BL-B3337D	GaAsP/GaP/ Yellow	585		35	80	30	150	2.1	2.6	150.0		
	BL-B2337D	GaP/GaP/ Green	568		30	80	30	150	2.2	2.6	180.0		
	BL-B4337D	GaAsP/GaP/ Orange	635		45	80	30	150	2.0	2.6	180.0		
T1 3/4 Flangeless 1.0" Lead 5.2φ	BL-B5137E	GaP/GaP/ Bright Red	700	Red Diffused	90	40	15	50	2.2	2.6	5.0	35	L-058
	BL-B4537E	GaAsP/GaP/ Hi-Eff Red	635		45	80	30	150	2.0	2.6	50.0		
	BL-B2137E	GaP/GaP/ Green	568	Green Diffused	30	80	30	150	2.2	2.6	50.0		
	BL-B3137E	GaAsP/GaP/ Yellow	585	Yellow Diffused	35	80	30	150	2.1	2.6	45.0	15	
	BL-B4137E	GaAsP/GaP/ Orange	635	Orange Diffused	45	80	30	150	2.0	2.6	50.0		
	BL-B9137E	GaP/GaP / Pure Green	555	Green Diffused	25	80	30	150	2.2	2.6	15.0		
T1 3/4 Narrow Viewing Angle 1.0" Lead 5.0φ	BL-B4537M	GaAsP/GaP/ Hi-Eff Red	635	Red Diffused	45	80	30	150	2.0	2.6	90.0	30	L-059
	BL-B2137M	GaP/GaP/ Green	568	Green Diffused	30	80	30	150	2.2	2.6	90.0		
	BL-B3137M	GaAsP/GaP/ Yellow	585	Yellow Diffused	35	80	30	150	2.1	2.6	80.0		
	BL-B4137M	GaAsP/GaP/ Orange	635	Orange Diffused	45	80	30	150	2.0	2.6	90.0	8	
	BL-B3337M	GaAsP/GaP/ Yellow	585	Water Clear	35	80	30	150	2.1	2.6	150.0		
	BL-B2337M	GaP/GaP/ Green	568		30	80	30	150	2.2	2.6	180.0		
	BL-B4337M	GaAsP/GaP/ Orange	635		45	80	30	150	2.0	2.6	180.0		
T1 3/4 1.0" Lead 5.0φ	BL-B5137M-1	GaP/GaP/ Bright Red	700	Red Diffused	90	40	15	50	2.2	2.6	5.0	45	L-060
	BL-B4537M-1	GaAsP/GaP/ Hi-Eff Red	635		45	80	30	150	2.0	2.6	50.0		
	BL-B2137M-1	GaP/GaP/ Green	568	Green Diffused	30	80	30	150	2.2	2.6	50.0		
	BL-B3137M-1	GaAsP/GaP/ Yellow	585	Yellow Diffused	35	80	30	150	2.1	2.6	45.0	20	
	BL-B2337M-1	GaP/GaP/ Green	568	Water Clear	30	80	30	150	2.2	2.6	150.0		
	BL-B4337M-1	GaAsP/GaP/ Orange	635		45	80	30	150	2.0	2.6	150.0		
T1 3/4 Flangeless 1.0" Lead 4.8φ	BL-B4537N	GaAsP/GaP/ Hi-Eff Red	635	Red Diffused	45	80	30	150	2.0	2.6	65.0	45	L-061
	BL-B2137N	GaP/GaP/ Green	568	Green Diffused	30	80	30	150	2.2	2.6	65.0		
	BL-B3137N	GaAsP/GaP/ Yellow	585	Yellow Diffused	35	80	30	150	2.1	2.6	55.0		
	BL-B4137N	GaAsP/GaP/ Orange	635	Orange Diffused	45	80	30	150	2.0	2.6	65.0	20	
	BL-B2337N	GaP/GaP/ Green	568	Water Clear	30	80	30	150	2.2	2.6	100.0		
	BL-B3337N	GaAsP/GaP/ Yellow	585		35	80	30	150	2.1	2.6	80.0		
	BL-B4637N	GaAsP/GaP/ Hi-Eff Red	635	Red Trans	45	80	30	150	2.0	2.6	100.0		
1.0"Lead 4.8φ	BL-B5138	GaP/GaP/ Bright Red	700	Red Diffused	90	40	15	50	2.2	2.6	5.0	40	L-062
	BL-B4538	GaAsP/GaP/ Hi-Eff Red	635		45	80	30	150	2.0	2.6	60.0		
	BL-B2138	GaP/GaP/ Green	568	Green Diffused	30	80	30	150	2.2	2.6	60.0		
	BL-B3138	GaAsP/GaP/ Yellow	585	Yellow Diffused	35	80	30	150	2.1	2.6	55.0	25	
	BL-B2438	GaP/GaP/ Green	568	Green Trans	30	80	30	150	2.0	2.6	90.0		
1.0"Lead 4.6φ	BL-B5138A	GaP/GaP/ Bright Red	700	Red Diffused	90	40	15	50	2.2	2.6	6.0	35	L-063
	BL-B4538A	GaAsP/GaP/ Hi-Eff Red	635		45	80	30	150	2.0	2.6	70.0		
	BL-B2138A	GaP/GaP/ Green	568	Green Diffused	30	80	30	150	2.2	2.6	70.0		
	BL-B3138A	GaAsP/GaP/ Yellow	585	Yellow Diffused	35	80	30	150	2.1	2.6	60.0	20	
	BL-B2438A	GaP/GaP/ Green	568	Green Trans	30	80	30	150	2.0	2.6	100.0		

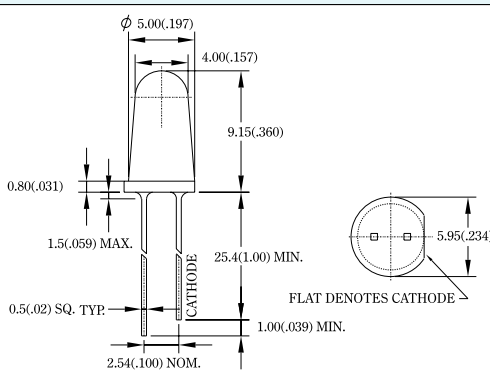
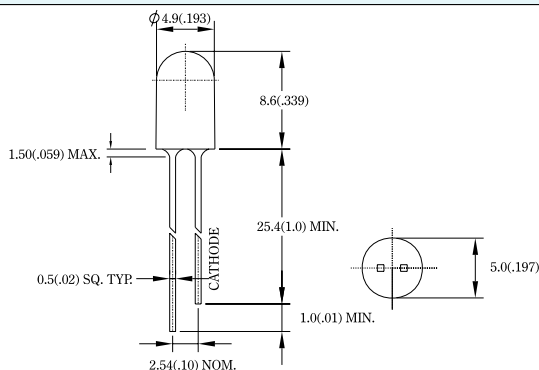
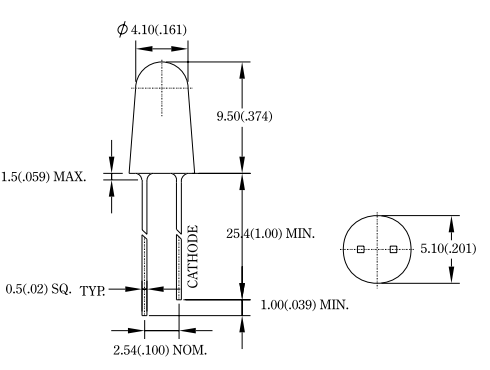
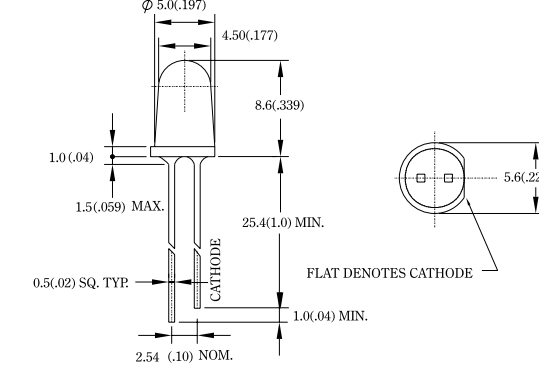
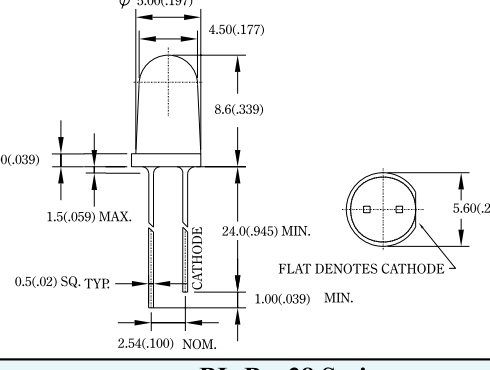
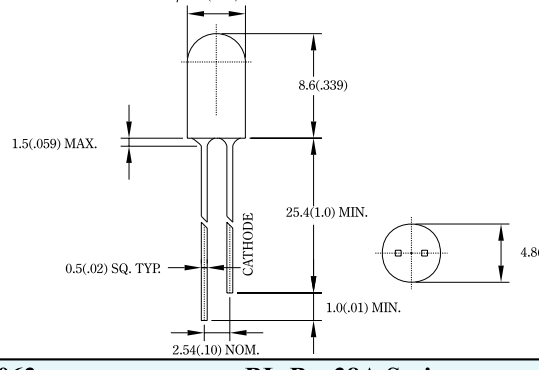
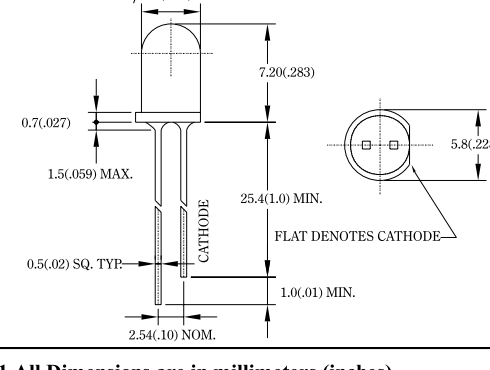
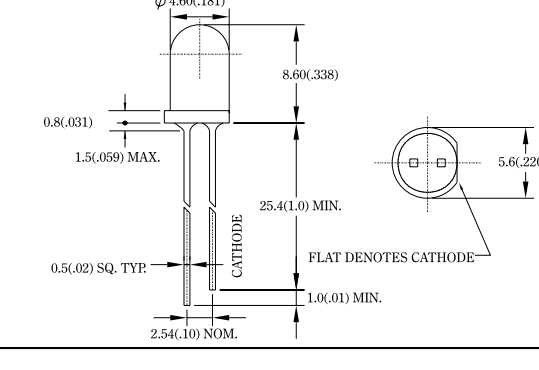
Remark : 1.Hi-Eff Red / High-Efficiency Red.

2. Trans / Transparent.

3. 2θ 1/2 The off-axis angle at which the luminous intensity is half the axial luminous intensity.



Standard LED Lamps Round Types

L-056	BL-Bxx37B Series 	L-057	BL-Bxx37D Series 
L-058	BL-Bxx37E Series 	L-059	BL-Bxx37M Series 
L-060	BL-Bxx37M-1 Series 	L-061	BL-Bxx37N Series 
L-062	BL-Bxx38 Series 	L-063	BL-Bxx38A Series 

Notes 1.All Dimensions are in millimeters (inches).
2.Tolerance is $\pm 0.25\text{mm}$ (.010").