

圖名 (DRAW NAME)

1.0 mm NON ZIF DOUBLE CONTACT FOR SMT TYPE

圖號 (DRAW NUMBER)

BL118 SERIES STRAIGHT 180°

圖檔 (FILE NAME *.DWG)

BL118 STRAIGHT 180° CONTACT



PERFORMANCE CHARACTERISTICS

CURRENT: 0.5A
OPERATING TEMPERATURE: -40°C TO 105°C
CONTACT RESISTANCE: 30 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGAOHMS MIN.
DIELECTRIC STRENGTH: 500 VAC MIN.



MATERIAL

HOUSING: HIGH TEMPERATURE THERMOPLASTIC UL94V-0

CONTACT: COPPER ALLOYS; TIN PLATED OVER NICKEL

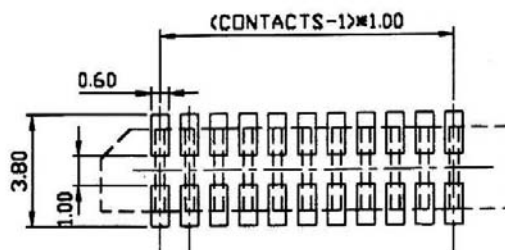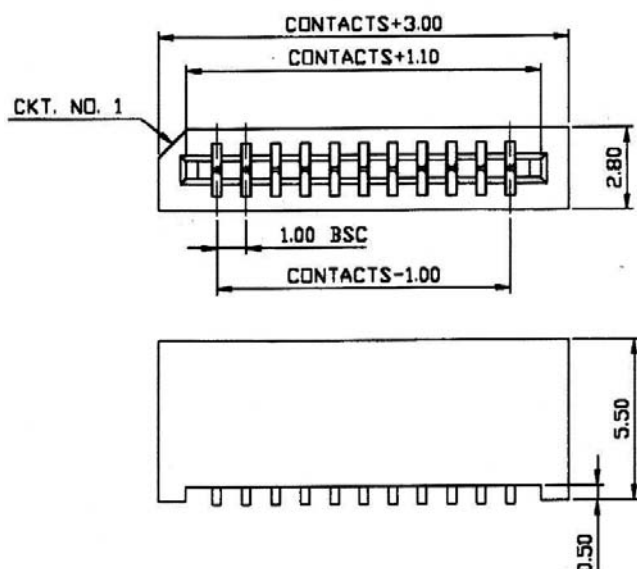

RECOMMENDED PCB LAYOUT

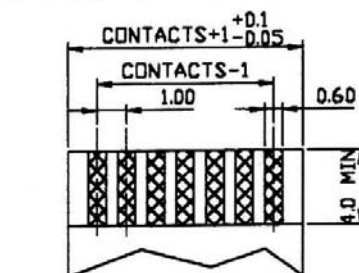

FPC/FFC $t=0.30\pm0.05$

UNIT : mm

ORDERING INFORMATION

BL118 011 S

PRODUCT SERIES

1.00mm NON ZIF
DOUBLE CONTACT
FOR SMT TYPE

NUMBER OF CONTACTS

04P TO 30P

STRAIGHT 180°

