

Description

The BP6903A is a high voltage, high speed halfbridge pre-driver for power MOSFET and IGBT. It has inputs for both high side and low side, and two output channels with internal dead time to avoid cross-conduction.

The input logic level is compatible with 3.3V/5V/15V signal. The floating high side channel can drive a N-channel power MOSFET or IGBT up to 600V.

Features

- Floating channel operation up to 600V
- Robust at negative transient voltage
- Gate drive supply range from 10V to 20V
- 3.3V, 5V and 15V input logic compatible
- Reverse input for low side
- UVLO for both high side and low side
- Built-in dead time
- Available in SOP8 package

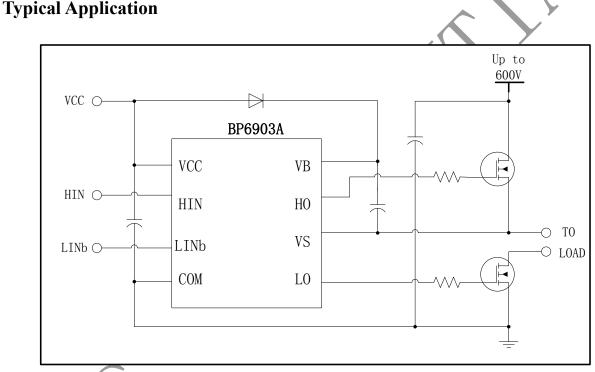


Figure 1. Typical application circuit






Ordering Information

Part Number	Package	Operation Temperature	Package Method	Marking
BP6903A	SOP8	-40 °C to 105 °C	Таре	BP6903 XXXXXYA XXWWX
			4,000 Piece/Roll	

Pin Configuration and Marking Information

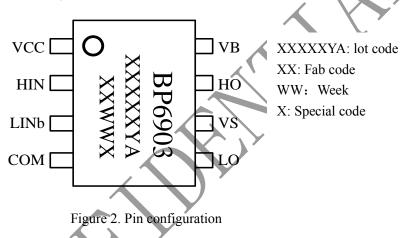

Pin Definition

	Pin No.	Name	Description	
	1	VCC	Low side and logic supply voltage	
	2	HIN	Logic input for high side, in phase with HO	
	3	LINb	Logic input for low side, out of phase with LO	
	4	СОМ	Logic ground and low side driver return	
	5	LO	Low side driver output	
\checkmark	6	VS	High side driver return	
	7	НО	High side driver output	
	8	VB	High side floating supply	



Disclaimer

The information provided in this datasheet is believed to be accurate and reliable. However, Bright Power Semiconductor (BPS) reserves the right to make changes at any time without prior notice.

No license, to any intellectual property right owned by BPS or any other third party, is granted under this document. BPS provides information in this datasheet "AS IS" and with all faults, and makes no warranty, express or implied, including but not limited to, the accuracy of the information provided in this datasheet, merchantability, fitness of a specific purpose, or non-infringement of intellectual property rights of BPS or any other third party. BPS disclaims any and all liabilities arising out of this datasheet or use of this datasheet, including without limitation consequential or incidental damages.