

用途：用于高功率 DC/DC 转换和功率开关。


Purpose: These devices are well suited for high efficiency switching DC/DC converters and switch mode power supplies.

特点：低栅电荷, 低反馈电容, 开关速度快。

Features: Low gate charge, low crss, fast switching.

极限参数/Absolute maximum ratings($T_a=25^\circ\text{C}$)

参数符号 Symbol	数值 Rating	单位 Unit
V_{DSS}	600	V
$I_D(T_c=25^\circ\text{C})$	4.0	A
$I_D(T_c=100^\circ\text{C})$	2.5	A
I_{DM}	16	A
V_{GSS}	± 30	V
E_{AS}	240	mJ
E_{AR}	10	mJ
I_{AR}	4.0	A
$P_D(T_c=25^\circ\text{C})$	33	W
T_J, T_{STG}	-55 to 150	$^\circ\text{C}$

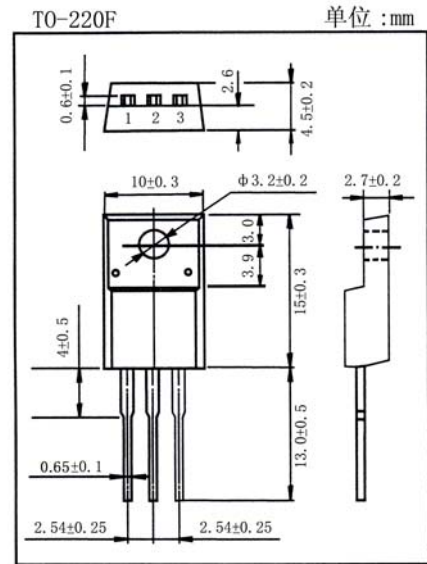

引脚： 1.G 2.D 3.S

电性能参数/Electrical Characteristics($T_a=25^\circ\text{C}$)

参数符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
BV_{DSS}	$V_{GS}=0V$ $I_D=250\mu A$	600			V
I_{DSS}	$V_{DS}=600V$ $V_{GS}=0V$			10	μA
	$V_{DS}=480V$ $T_c=125^\circ\text{C}$			100	μA
I_{GSS}	$V_{GS}=\pm 30V$ $V_{DS}=0V$			± 0.1	μA
$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\mu A$	2.0		4.0	V
$R_{DS(on)}$	$V_{GS}=10V$ $I_D=2.0A$		2.0	2.5	Ω
g_{FS}	$V_{DS}=40V$ $I_D=2.0A$		4.7		S
V_{SD}	$V_{GS}=0V$ $I_S=4.0A$			1.4	V
C_{iss}	$V_{DS}=25V$ $V_{GS}=0V$ $f=1.0\text{MHz}$		545	710	pF
C_{oss}			60	80	pF
C_{rss}			8	11	pF
$t_{d(on)}$	$V_{DD}=300V$ $I_D=4.0A$ $R_G=25\Omega$		10	30	ns
t_r			35	80	ns
$t_{d(off)}$			45	100	ns
t_f			40	90	ns