


FEATURES

- The zener voltage are graded according to the international E24 standard .Other voltage tolerance and higher zener voltage on request.

MECHANICAL DATA

- Case:** DO-35 glass case
- Polarity:** Color band denotes cathode end
- Weight:** Approx. 0.13gram

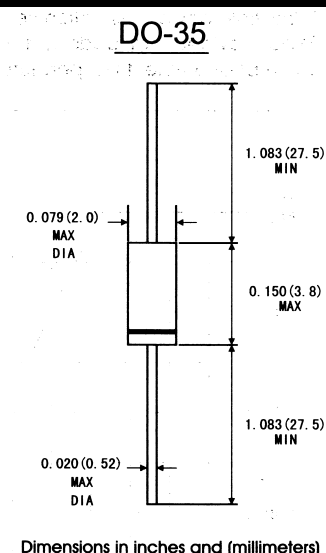

ABSOLUTE MAXIMUM RATINGS(LIMITING VALUES)(TA=25℃)

	Symbols	Value	Units
Zener current see table "Characteristics"			
Power dissipation at TA=50℃	P _{tot}	500 ¹⁾	mW
Junction temperature	T _J	175	℃
Storage temperature range	T _{STG}	-65 to + 175	℃

1)Valid provided that at a distance of 8mm from case are kept at ambient temperature

ELECTRICAL CHARACTERISTICS(TA=25℃)

	Symbols	Min.	Typ.	Max.	Units
Thermal resistance junction to ambient	R θ JA			300 ¹⁾	K/W
Forward voltage at IF=100mA	V _F			1	V

1)Valid provided that leads at a distance of 8mm from case are kept at ambient temperature

BZX55... SILICON PLANAR ZENER DIODES

Type	Zener Voltage Range)			Dynamic resistance			Reverse leakage current			Temp coefficient of zener voltage
	V _{ZNOM}	I _{ZT} for V _{ZT} 2)		r _{zjt} and r _{zjk} at I _{zk}			I _R and I _R 2) at V _R			TK _{vz}
	V	mA	V	Ω	Ω	mA	μ A	μ A	V	%/K
BZX 55/C 0V8 3)	0.8	5	0.73..0.83	<8	<50	1	-	-	-	-0.26...-0.23
BZX 55/C 2V0	2.0		1.9..2.1	<85	<600		<100	<200	<1	-0.09...-0.06
BZX 55/C 2V4	2.4		2.28..2.56				<50	<100		
BZX 55/C 2V7	2.7		2.5..2.9				<10	<50		
BZX 55/C 3V0	3		2.8..3.2				<4	<40		-0.08...-0.05
BZX 55/C 3V3	3.3		3.1..3.5				<2			
BZX 55/C 3V6	3.6		3.4..3.8							
BZX 55/C 3V9	3.9		3.7..4.1				<1	<20		-0.06...-0.03
BZX 55/C 4V3	4.3		4.0..4.6	<75			<10	-0.05...+0.02		
BZX 55/C 4V7	4.7		4.4..5.0	<60			<0.5	<10		-0.02...+0.02
BZX 55/C 5V1	5.1		4.8..5.4	<35	<550		<0.1	<2	2.0	0.03..0.06
BZX 55/C 5V6	5.6		5.2..6.0	<25	<450				3.0	0.03..0.07
BZX 55/C 6V2	6.2		5.8..6.6	<10	<200				5.0	0.03..0.07
BZX 55/C 6V8	6.8		6.4..7.2	<8	<150				6.2	0.03..0.08
BZX 55/C 7V5	7.5		7.0..7.9	<7	<50				6.8	0.03..0.09
BZX 55/C 8V2	8.2		7.7..8.7	<7					7.5	0.03..0.1
BZX 55/C 9V1	9.1		8.5..9.6	<10					8.2	0.03..0.11
BZX 55/C 10	10		9.4..10.6	<15	<70				9.1	
BZX 55/C 11	11		10.4..11.6	<20	<70				10.0	
BZX 55/C 12	12		11.4..12.7	<20	<90				11.0	
BZX 55/C 13	13		12.4..14.1	<26	<110				12	
BZX 55/C 15	15		13.8..15.6	<30	<110				13	
BZX 55/C 16	16		15.3..17.1	<40	<170				15	
BZX 55/C 18	18		16.8..19.1	<50	<170					
BZX 55/C 20	20		18.8..21.2	<55	<220					

BZX55... SILICON PLANAR ZENER DIODES

BZX 55/C 22	22	5	20.8.23.3	<55	<220	1	<0.1	<2	16	0.04.0.12	
BZX 55/C 24	24		22.8.25.6	<80					18		
BZX 55/C 27	27		25.1.28.9	<80					20		
BZX 55/C 30	30		28.32						22		
BZX 55/C 33	33		31..35						24		
BZX 55/C 36	36		34.38						27		
BZX 55/C 39	39	2.5	37.41		<500	0.5		<5	30		0.04.0.12
BZX 55/C 43	43		40.46		<500				33		
BZX 55/C 47	47		44.50		<600				36		
BZX 55/C 51	51		48..54		<700			<1000	39		
BZX 55/C 56	56		52.60		<700				43		
BZX 55/C 62	62		58.66		<1000				47		
BZX 55/C 68	68		64..72						51		
BZX 55/C 75	75		70..79						56		
BZX 55/C 82	82			77..87				<1500	0.25	<10	
BZX 55/C 91	91		85.96		<2000	0.1		68			
BZX 55/C 100	100		94..106		<5000			75			
BZX 55/C 110	110		104..116		<5000			82			
BZX 55/C 120	120		114..127		<5500			91			
BZX 55/C 130	130		124..141		<6000			100			
BZX 55/C 150	150		138..156		<6500			110			
BZX 55/C 160	160		153..171		<7000			120			
BZX 55/C 180	180		168..191		<8500			130			
BZX 55/C 200	200		188..212		<10000			150			


1) Tested with pulses $t_p=20\text{ms}$

2) Valid provided that leads are kept at ambient temperature at a distance of 8mm from case

3) The BZX55-C0V8 is silicon diode with operation in forward direction. Hence, the index of all parameters should be 'F' instead of 'Z'. Connect the cathode lead to the negative pole.

BXZ55... SILICON PLANAR ZENER DIODES

BREAKDOWN CHARACTERISTICS AT $T_J = \text{CONSTANT}$ (PULSED)

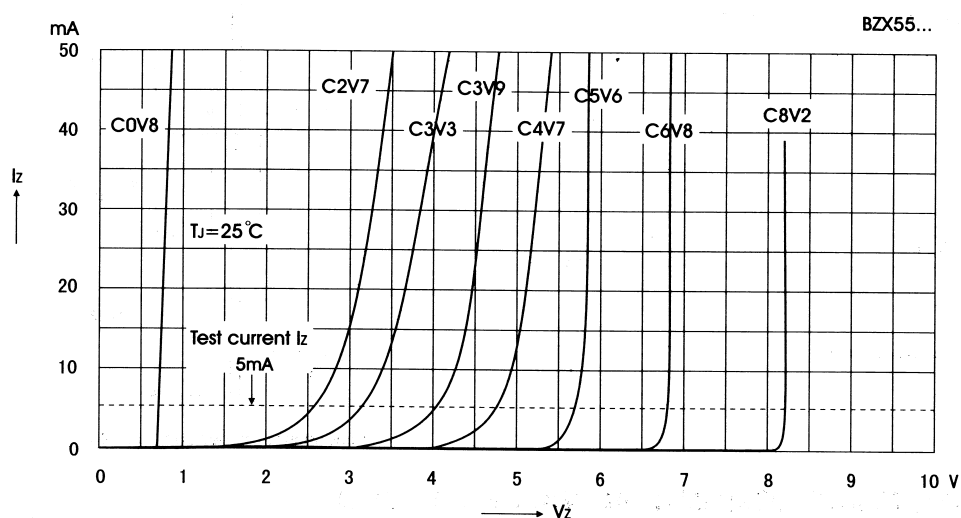

BREAKDOWN CHARACTERISTICS AT $T_J = \text{CONSTANT}$ (PULSED)

