

**2SC3504**

High-Definition CRT Display, Video Output Applications


Features

- High f_T .
- Small reverse transfer capacitance.

Package Dimensions

unit:mm

2006A

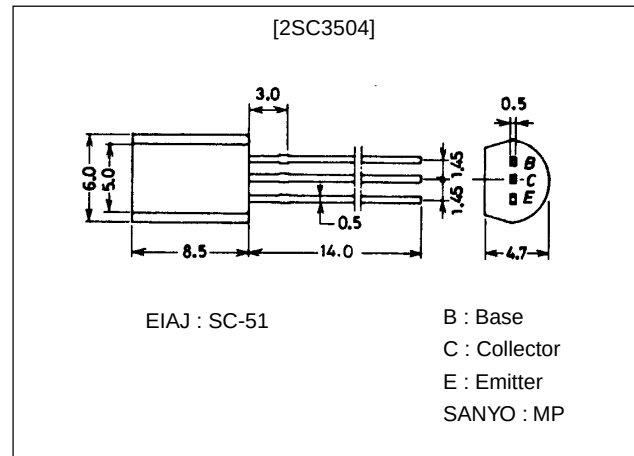

Specifications

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Condition	Rating	Unit
Collector-to-Base Voltage	CBO		70	V
Collector-to-Emitter Voltage	CEO		60	V
Emitter-to-Base Voltage	EBO		4	V
Collector Current	C		50	mA
Collector Current (Pulse)	CP		100	mA
Collector Dissipation	C		900	mW
Junction Temperature	T		150	$^\circ\text{C}$
Storage Temperature	Tst		-55 to +150	$^\circ\text{C}$

Electrical Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings			Unit
			mA	mA	mA	
Collector Cutoff Current	CBO	$V_{CB}=40\text{V}, I_E=0$			0A	μ
Emitter Cutoff Current	EBO	$V_{EB}=3\text{V}, I_C=0$			1A	μ
DC Current Gain	h_{FE}	$V_{CE}=10\text{V}, I_C=10\text{mA}$	60*		320	
Gain-Bandwidth Product	T	$V_{CE}=10\text{V}, I_C=10\text{mA}$	300	50		MHz
Base-to-Collector Time Constant	$h_{b'c}C_c$	$V_{CE}=10\text{V}, I_C=10\text{mA}$		80	2s	p
Reverse Transfer Capacitance	C _{tr}	$C_B=0\text{V}, f=1\text{MHz}$		16	1F	p
Collector-to-Emitter Saturation Voltage	CE(sat)	$I_C=20\text{mA}, I_B=2\text{mA}$			0.5	V
Base-to-Emitter Saturation Voltage	BE(sat)	$I_C=20\text{mA}, I_B=0\text{mA}$			1V	

* : The 2SC3504 is classified by 10mA h_{FE} as follows :

60	D	120	100	E	200	160	F	320
----	---	-----	-----	---	-----	-----	---	-----

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co., Ltd. Semiconductor Business Headquarters

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

N2098HA (KT)/4237AT/3205KI, TS No.1438-1/3

2SC3504

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Collector-to-Base Breakdown Voltage	(BR)CBO	$I_C=10\mu A, I_E=0$	7V			
Collector-to-Emitter Breakdown Voltage	(BR)CEO	$I_C=1mA, R_{BE}=\infty$	6V			
Emitter-to-Base Breakdown Voltage	(BR)EBO	$I_E=10\mu A, I_C=0$				V

