

# CDK1305

## 10-bit, 40 MSPS 175mW A/D Converter

www.datasheet4u.com

### FEATURES

- 40 MSPS converter
- 175mW power dissipation
- On-chip track-and-hold
- Single +5V power supply
- TTL/CMOS outputs
- 5pF input capacitance
- Tri-state output buffers
- High ESD protection: 3,500V minimum
- Selectable +3V or +5V logic I/O

### APPLICATIONS

- All high-speed applications where low power dissipation is required
- Video imaging
- Medical imaging
- Radar receivers
- IR imaging
- Digital communications


### General Description

The CDK1305 is a 10-bit, low power analog-to-digital converter capable of minimum word rates of 40 MSPS. The on-chip track-and-hold function assures very good dynamic performance without the need for external components. The input drive requirements are minimized due to the CDK1305 low input capacitance of only 5pF.

Power dissipation is extremely low at only 175mW typical at 40 MSPS with a power supply of +5.0V. The digital outputs are +3V or +5V, and are user selectable. The CDK1305 is pin-compatible with an entire family of 10-bit, CMOS converters (CDK1304/05/06), which simplifies upgrades. The CDK1305 has incorporated proprietary circuit design\* and CMOS processing technologies to achieve its advanced performance. Inputs and outputs are TTL/CMOS-compatible to interface with TTL/CMOS logic systems. Output data format is straight binary.

The CDK1305 is available in 28-lead SOIC and 32-lead small (7mm square) TQFP packages over the commercial temperature range.

### Block Diagram

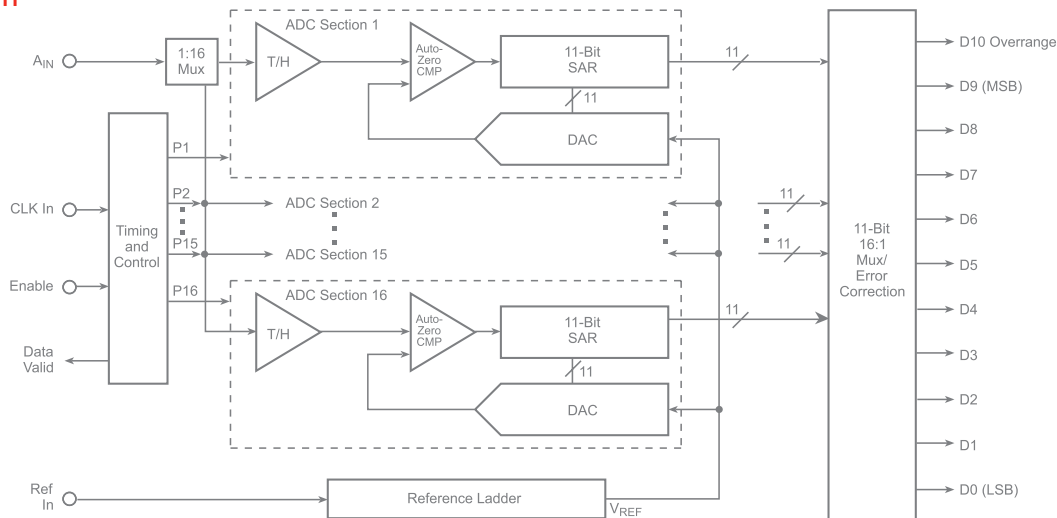

### Ordering Information

| Part Number    | Package | Pb-Free | RoHS Compliant | Operating Temperature Range | Packaging Method |
|----------------|---------|---------|----------------|-----------------------------|------------------|
| CDK1305CSO28   | SOIC-28 | Yes     | Yes            | 0°C to +70°C                | Rail             |
| CDK1305CSO28_Q | SOIC-28 | No      | No             | 0°C to +70°C                | Rail             |
| CDK1305CTQ32   | TQFP-32 | Yes     | Yes            | 0°C to +70°C                | Rail             |
| CDK1305CTQ32_Q | TQFP-32 | No      | No             | 0°C to +70°C                | Rail             |



Moisture sensitivity level for SOIC-28 is MSL-1 and TQFP is MSL-3.



Pin Configuration

SOIC-28

TQFP-32

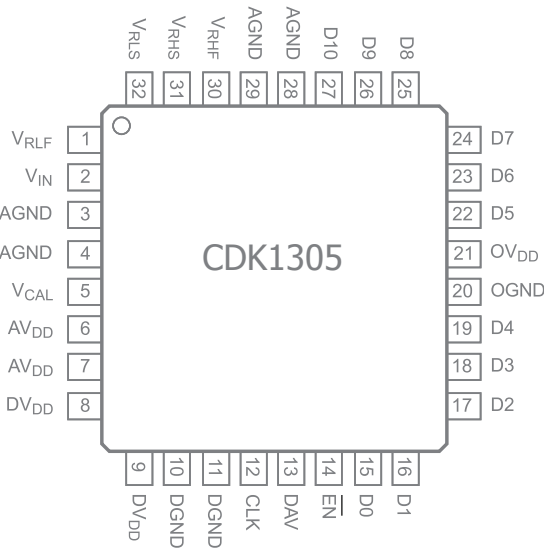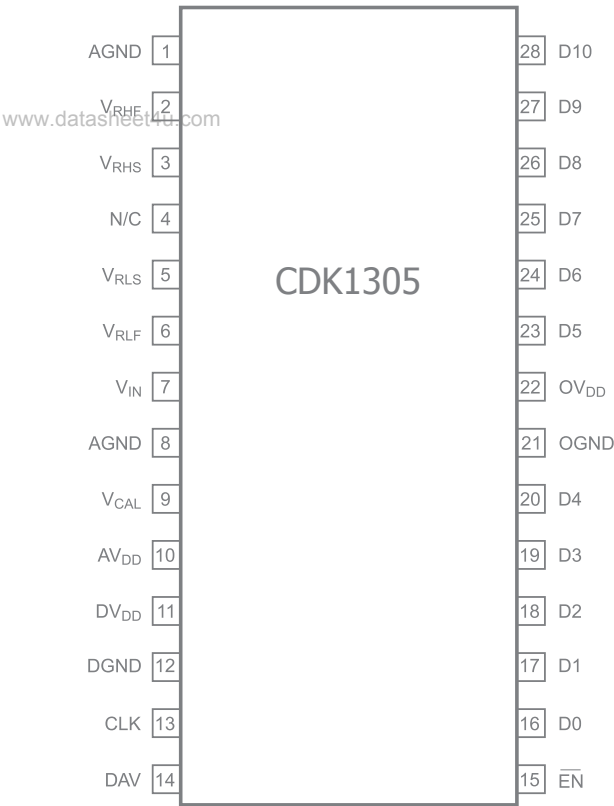

Pin Assignments

| SOIC-28         | TQFP-32         | Pin Name | Description                       |
|-----------------|-----------------|----------|-----------------------------------|
| 1,8             | 3,4,28,29       | AGND     | Analog Ground                     |
| 2               | 30              | VRHF     | Reference High Force              |
| 3               | 31              | VRHS     | Reference High Sense              |
| 5               | 32              | VRLS     | Reference Low Sense               |
| 6               | 1               | VRLF     | Reference Low Force               |
| 9               | 5               | Vcal     | Calibration Reference             |
| 7               | 2               | VIN      | Analog Input                      |
| 10              | 6,7             | AVDD     | Analog VDD                        |
| 11              | 8,9             | DVDD     | Digital VDD                       |
| 12              | 10,11           | DGND     | Digital Ground                    |
| 13              | 12              | CLK      | Input Clock $f_{CLK} = FS$ (TTL)  |
| 15              | 14              | EN       | Output Enable                     |
| 16-20,<br>23-27 | 15-19,<br>22-26 | D0-D9    | Tri-State Data Output, (D0 = LSB) |
| 28              | 27              | D10      | Tri-State Output Overrange        |
| 14              | 13              | DAV      | Data Valid Output                 |
| 22              | 21              | OVDD     | Digital Output Supply             |
| 21              | 20              | OGND     | Digital Output Ground             |
| 4               | —               | N/C      | No Connect                        |



## Absolute Maximum Ratings

The safety of the device is not guaranteed when it is operated above the "Absolute Maximum Ratings". The device should not be operated at these "absolute" limits. Adhere to the "Recommended Operating Conditions" for proper device function. The information contained in the Electrical Characteristics tables and Typical Performance plots reflect the operating conditions noted on the tables and plots.

www.datasheet4u.com

| Parameter           | Min  | Max             | Unit |
|---------------------|------|-----------------|------|
| Supply Voltages     |      |                 |      |
| $AV_{DD}$           |      | +6              | V    |
| $DV_{DD}$           |      | +6              | V    |
| Input Voltages      |      |                 |      |
| Analog input        | -0.5 | $AV_{DD} + 0.5$ | V    |
| $V_{Ref}$           | 0    | $AV_{DD}$       | V    |
| CLK input           |      | $V_{DD}$        | V    |
| $AV_{DD} - DV_{DD}$ | -100 | 100             | mV   |
| AGND – DGND         | -100 | 100             | mV   |
| Digital Outputs     |      | 10              | mA   |

## Reliability Information

| Parameter                 | Min | Typ | Max  | Unit |
|---------------------------|-----|-----|------|------|
| Storage Temperature Range | -65 |     | +150 | °C   |

## Recommended Operating Conditions

| Parameter                               | Min | Typ | Max  | Unit |
|---|-----|-----|------|------|
| Operating Temperature Range             | 0   |     | +70  | °C   |
| Junction Temperature Range              |     |     | +175 | °C   |
| Lead Temperature (soldering 10 seconds) |     |     | +300 | °C   |



## Electrical Characteristics

( $T_A = T_{Min}$  to  $T_{Max}$ ,  $AV_{DD} = DV_{DD} = OV_{DD} = +5V$ ,  $V_{IN} = 0$  to  $4V$ ,  $f_{clk} = 40$  MSPS,  $V_{RHS} = 4V$ ,  $V_{RLS} = 0V$ ; unless otherwise noted)

| Symbol                     | Parameter                                   | Conditions   | Min              | Typ  | Max              | Units            |
|----------------------------|---|--|------------------|------|------------------|------------------|
|                            | Resolution                                  |  | 10               |      |                  | bits             |
| DC Performance             |   |  |                  |      |                  |                  |
| DLE                        | Differential Linearity Error <sup>(1)</sup> |  | -0.5             |      | +0.5             | LSB              |
| ILE                        | Integral Linearity Error <sup>(1)</sup>     |  | -1.0             |      | +1.0             | LSB              |
|                            | No Missing Codes                            |  | Guaranteed       |      |                  |                  |
| Analog Input               |   |  |                  |      |                  |                  |
|                            | Input Voltage Range <sup>(1)</sup>          |  | V <sub>RLS</sub> |      | V <sub>RHS</sub> | V                |
|                            | Input Resistance <sup>(2)</sup>             |  | 50               |      |                  | kΩ               |
|                            | Input Capacitance                           |  |                  | 5    |                  | pF               |
|                            | Input Bandwidth                             | Small Signal   |                  | 250  |                  | MHz              |
|                            | Gain Error                                  |  |                  | ±2.0 |                  | LSB              |
|                            | Offset Error                                |  |                  | ±2.0 |                  | LSB              |
| Reference Input            |   |  |                  |      |                  |                  |
|                            | Resistance <sup>(1)</sup>                   |  | 300              | 500  | 600              | Ω                |
|                            | Bandwidth                                   | Small Signal   |                  | 150  |                  | MHz              |
|                            | Voltage Range                               | V <sub>RLS</sub> <sup>(2)</sup>  | 0                |      | 2.0              | V                |
|                            |   | V <sub>RHS</sub> <sup>(2)</sup>  | 3.0              |      | AV <sub>DD</sub> | V                |
|                            |   | V <sub>RHS</sub> − V <sub>RLS</sub>  |                  | 4.0  |                  | V                |
|                            |   | Δ (V <sub>RHF</sub> − V <sub>RHS</sub> )   |                  | 90   |                  | mV               |
|                            |   | Δ (V <sub>RLS</sub> − V <sub>RLF</sub> )   |                  | 75   |                  | mV               |
| Reference Settling Time    |   |  |                  |      |                  |                  |
|                            | V <sub>RHS</sub>                            |  |                  | 15   |                  | CLK Cycle        |
|                            | V <sub>RLS</sub>                            |  |                  | 20   |                  | CLK Cycle        |
| Conversion Characteristics |   |  |                  |      |                  |                  |
|                            | Maximum Conversion Rate <sup>(1)</sup>      |  | 40               |      |                  | MHz              |
|                            | Minimum Conversion Rate <sup>(2)</sup>      |  | 2                |      |                  | MHz              |
|                            | Pipeline Delay (Latency) <sup>(2)</sup>     |  |                  |      | 12               | CLK Cycle        |
|                            | Aperture Delay Time                         |  |                  | 4.0  |                  | ns               |
|                            | Aperture Jitter Time                        |  |                  | 30   |                  | ps <sub>pp</sub> |
| Dynamic Performance        |   |  |                  |      |                  |                  |
| ENOB                       | Effective Number of Bits                    | f <sub>IN</sub> = 3.58MHz  |                  | 8.5  |                  | Bits             |
|                            |   | f <sub>IN</sub> = 10.3MHz  |                  | 8.3  |                  | Bits             |
| SNR                        | Signal-to-Noise Ratio w/o Harmonics         | f <sub>IN</sub> = 3.58MHz <sup>(1)</sup>   | 52               | 54   |                  | dB               |
|                            |   | f <sub>IN</sub> = 10.3MHz <sup>(1)</sup>   | 51               | 52   |                  | dB               |
| THD                        | Total Harmonic Distortion                   | f <sub>IN</sub> = 3.58MHz <sup>(1)</sup> ,<br>9 distortion bins from 1024 pt FFT | 55               | 61   |                  | dB               |
|                            |   | f <sub>IN</sub> = 10.3MHz <sup>(1)</sup> ,<br>9 distortion bins from 1024 pt FFT | 52               | 53   |                  | dB               |
| SINAD                      | Signal-to-Noise and Distortion              | f <sub>IN</sub> = 3.58MHz <sup>(1)</sup>   | 51               | 54   |                  | dB               |
|                            |   | f <sub>IN</sub> = 10.3MHz <sup>(1)</sup>   | 49               | 52   |                  | dB               |

### Notes:

- 100% production tested at +25°C.
- Parameter is guaranteed (but not tested) by design and characterization data.



## Electrical Characteristics

( $T_A = T_{Min}$  to  $T_{Max}$ ,  $AV_{DD} = DV_{DD} = OV_{DD} = +5V$ ,  $V_{IN} = 0$  to  $4V$ ,  $f_{clk} = 40$  MSPS,  $V_{RHS} = 4V$ ,  $V_{RLS} = 0V$ ; unless otherwise noted)

| Symbol                    | Parameter                                 | Conditions                       | Min  | Typ  | Max  | Units            |
|---------------------------|---|----------------------------------|------|------|------|------------------|
| SFDR                      | Spurious Free Dynamic Range               | $f_{IN} = 1\text{MHz}$           |      | 63   |      | ps <sub>pp</sub> |
|                           | Differential Phase                        |                                  |      | ±0.3 |      | deg              |
|                           | Differential Gain                         |                                  |      | ±0.3 |      | %                |
| Digital Inputs            |   |                                  |      |      |      |                  |
|                           | Logic "1" Voltage <sup>(1)</sup>          |                                  | 2.0  |      |      | V                |
|                           | Logic "0" Voltage <sup>(1)</sup>          |                                  |      |      | 0.8  | V                |
|                           | Maximum Input Current Low <sup>(1)</sup>  |                                  | -10  |      | +10  | μA               |
|                           | Maximum Input Current High <sup>(1)</sup> |                                  | -10  |      | +10  | μA               |
|                           | Input Capacitance                         |                                  |      | +5   |      | pF               |
| Digital Outputs           |   |                                  |      |      |      |                  |
|                           | Logic "1" Voltage <sup>(1)</sup>          | I <sub>OH</sub> = 0.5mA          | 3.5  |      |      | V                |
|                           | Logic "0" Voltage <sup>(1)</sup>          | I <sub>OL</sub> = 1.6mA          |      |      | 0.4  | V                |
| T <sub>R</sub>            | Rise Time                                 | 15pF load                        |      | 10   |      | ns               |
| T <sub>F</sub>            | Fall Time                                 | 15pF load                        |      | 10   |      | ns               |
|                           | Output Enable to Data Output Delay        | 20pF load, T <sub>A</sub> = 25°C |      | 10   |      | ns               |
|                           |   | 50pF load over temp              |      | 22   |      | ns               |
| Power Supply Requirements |   |                                  |      |      |      |                  |
| OV <sub>DD</sub>          | Digital Voltage Supply <sup>(2)</sup>     |                                  | 3.0  |      | 5.0  | V                |
| DV <sub>DD</sub>          |   |                                  | 4.75 | 5.0  | 5.25 | V                |
| AV <sub>DD</sub>          |   |                                  | 4.75 | 5.0  | 5.25 | V                |
| AI <sub>DD</sub>          | Digital Voltage Current <sup>(1)</sup>    |                                  |      | 17   | 22   | mA               |
| DI <sub>DD</sub>          |   |                                  |      | 18   | 23   | mA               |
|                           | Power Dissipation <sup>(1)</sup>          |                                  |      | 175  | 225  | mW               |

### Notes:


- 100% production tested at +25°C.
- Parameter is guaranteed (but not tested) by design and characterization data.




## Typical Performance Characteristics

( $T_A = T_{Min}$  to  $T_{Max}$ ,  $AV_{DD} = DV_{DD} = OV_{DD} = +5V$ ,  $V_{IN} = 0$  to  $4V$ ,  $f_{clk} = 40$  MSPS,  $V_{RHS} = 4V$ ,  $V_{RLS} = 0V$ ; unless otherwise noted)


### Performance vs. Sample Rate

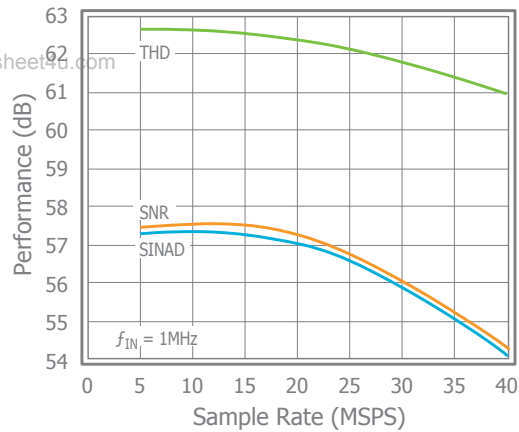


### SNR, THD, SINAD vs. Input Freq.

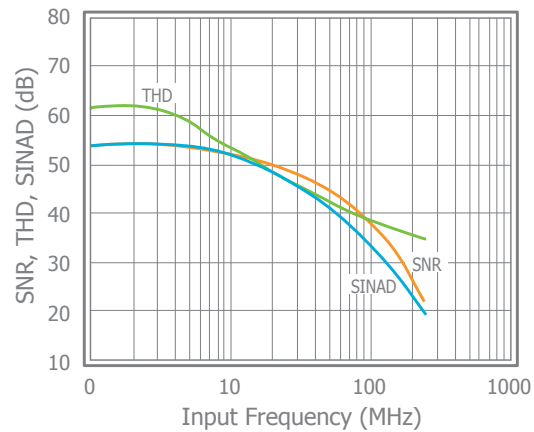


### SNR, THD vs. Input Range

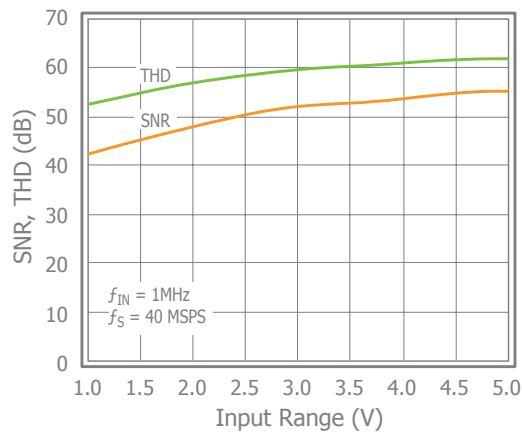


### Power Dissipation vs. Sample Rate

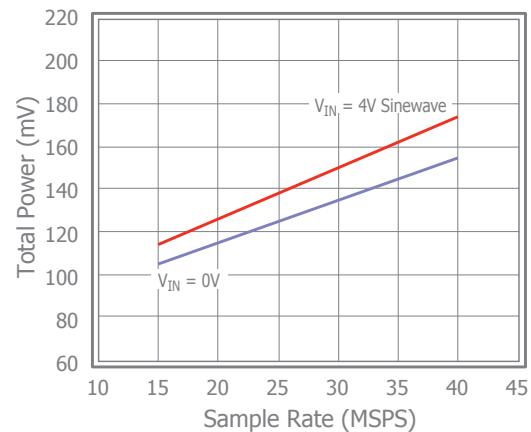

### Spectral Response

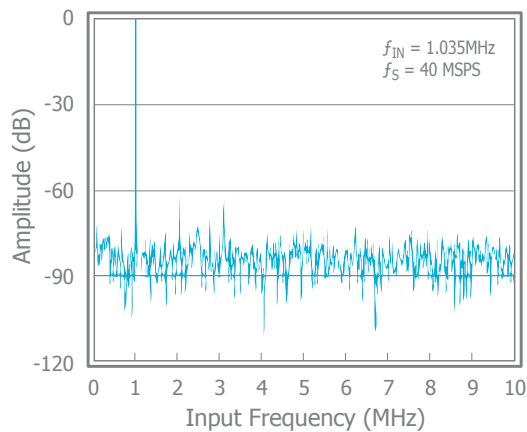

### Performance vs. Temperature

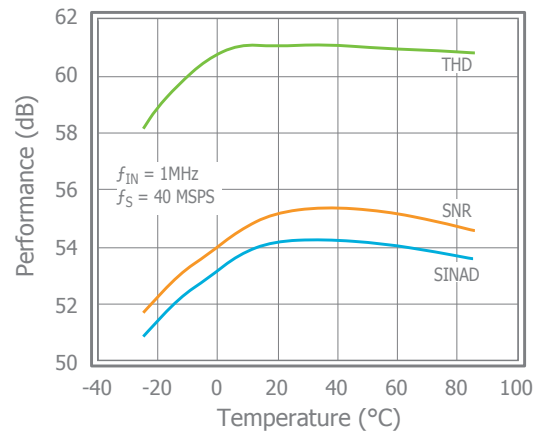



## Specification Definitions

### Aperture Delay

Aperture delay represents the point in time, relative to the rising edge of the CLOCK input, that the analog input is sampled.

www.datasheet4u.com

### Aperture Jitter

The variations in aperture delay for successive samples.

### Differential Gain (DG)

A signal consisting of a sine wave superimposed on various DC levels is applied to the input. Differential gain is the maximum variation in the sampled sine wave amplitudes at these DC levels.

### Differential Phase (DP)

A signal consisting of a sine wave superimposed on various DC levels is applied to the input. Differential phase is the maximum variation in the sampled sine wave phases at these DC levels.

### Effective Number Of Bits (ENOB)

$SINAD = 6.02N + 1.76$ , where N is equal to the effective number of bits.

$$N = \frac{SINAD - 1.76}{6.02}$$

### Input Bandwidth

Small signal (50mV) bandwidth (3dB) of analog input stage.

### Differential Linearity Error (DLE)

Error in the width of each code from its theoretical value.  
(Theoretical =  $V_{FS}/2^N$ )

### Integral Linearity Error (ILE)

Linearity error refers to the deviation of each individual code (normalized) from a straight line drawn from -FS through +FS. The deviation is measured from the edge of each particular code to the true straight line.

### Output Delay

Time between the clock's triggering edge and output data valid.

### Overvoltage Recovery Time

The time required for the ADC to recover to full accuracy after an analog input signal 125% of full scale is reduced to 50% of the full-scale value.

### Signal-To-Noise Ratio (SNR)

The ratio of the fundamental sinusoid power to the total noise power. Harmonics are excluded.

### Signal-To-Noise And Distortion (SINAD)

The ratio of the fundamental sinusoid power to the total noise and distortion power.

### Total Harmonic Distortion (THD)

The ratio of the total power of the first 9 harmonics to the power of the measured sinusoidal signal.

### Spurious Free Dynamic Range (SFDR)

The ratio of the fundamental sinusoidal amplitude to the single largest harmonic or spurious signal.

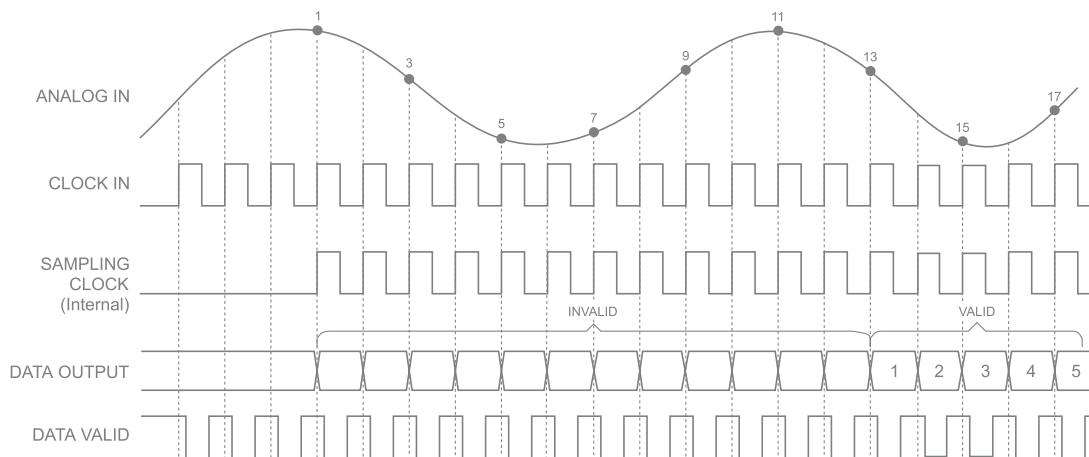


Figure 1. Timing Diagram 1

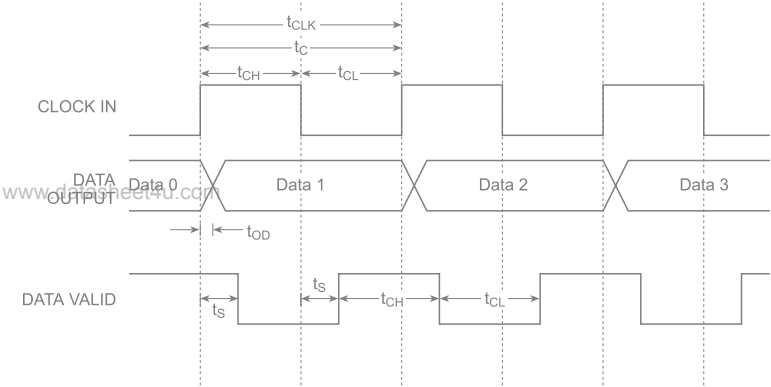


Figure 2. Timing Diagram 2

Table 1. Timing Parameters

| Description                     | Sym       | Min       | Typ | Max | Units |
|---------------------------------|-----------|-----------|-----|-----|-------|
| Conversion Time                 | $t_C$     | $t_{CLK}$ |     |     | ns    |
| CLK Period                      | $t_{CLK}$ | 40        |     |     | ns    |
| CLK High Duty Cycle             | $t_{CH}$  | 40        | 50  | 60  | %     |
| CLK Low Duty Cycle              | $t_{CL}$  | 40        | 50  | 60  | %     |
| CLK to Output Delay (15pF load) | $t_{OD}$  |           | 17  |     | ns    |
| CLK to DAV                      | $t_S$     |           | 10  |     | ns    |

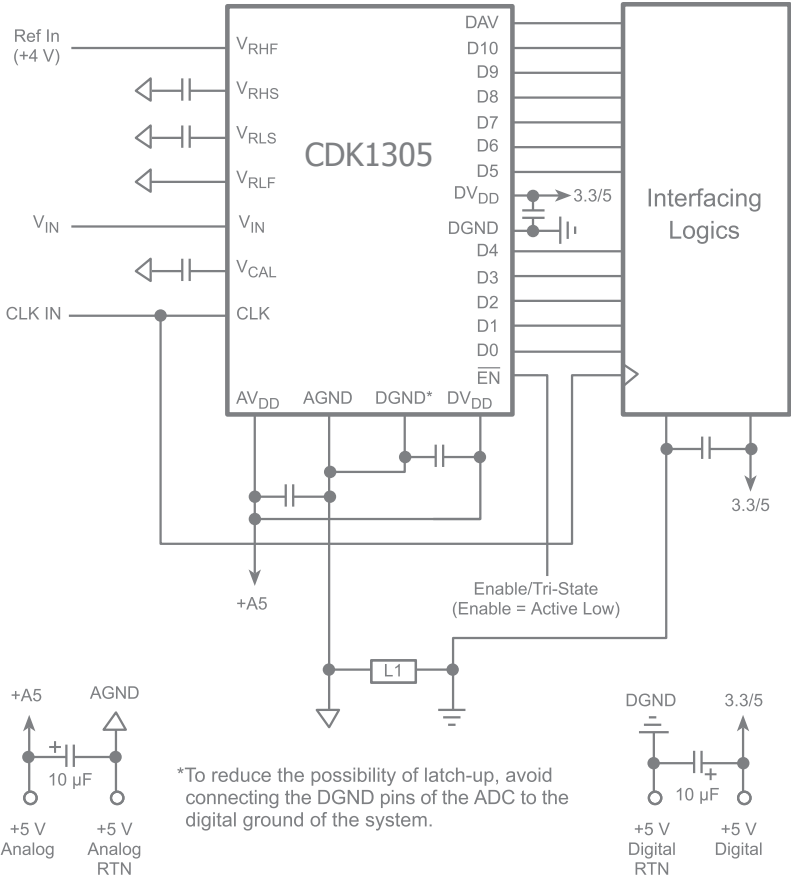


Figure 3. Typical Interface Circuit Diagram





## Typical Interface Circuit

Very few external components are required to achieve the stated device performance. Figure 2 shows the typical interface requirements when using the CDK1305 in normal circuit operation. The following sections provide descriptions of the major functions and outline critical performance criteria to consider for achieving the optimal device performance.

## Power Supplies And Grounding

Cadeka suggests that both the digital and the analog supply voltages on the CDK1305 be derived from a single analog supply as shown in Figure 2. A separate digital supply should be used for all interface circuitry. Cadeka suggests using this power supply configuration to prevent a possible latch-up condition on powerup.

## Operating Description

The general architecture for the CMOS ADC is shown in the Block Diagram. The design contains 16 identical successive approximation ADC sections, all operating in parallel, a 16-phase clock generator, an 11-bit 16:1 digital output multiplexer, correction logic, and a voltage reference generator that provides common reference levels for each ADC section.

The high sample rate is achieved by using multiple SAR ADC sections in parallel, each of which samples the input signal in sequence. Each ADC uses 16 clock cycles to complete a conversion. The clock cycles are allocated as shown in Table 2.

Table 2. Clock Cycles

| Clock | Operation                 |
|-------|---------------------------|
| 1     | Reference zero sampling   |
| 2     | Auto-zero comparison      |
| 3     | Auto-calibrate comparison |
| 4     | Input sample              |
| 5-15  | 11-bit SAR conversion     |
| 16    | Data transfer             |

The 16-phase clock, which is derived from the input clock, synchronizes these events. The timing signals for adjacent ADC sections are shifted by one clock cycle so that the analog input is sampled on every cycle of the input clock by exactly one ADC section. After 16 clock periods, the timing cycle repeats. The latency from analog input sample to the corresponding digital output is 12 clock cycles.

- Since only 16 comparators are used, a huge power savings is realized.
- The auto-zero operation is done using a closed loop system that uses multiple samples of the comparator's response to a reference zero.
- The auto-calibrate operation, which calibrates the gain of the MSB reference and the LSB reference, is also done with a closed loop system. Multiple samples of the gain error are integrated to produce a calibration voltage for each ADC section.
- Capacitive displacement currents, which can induce sampling error, are minimized since only one comparator samples the input during a clock cycle.
- The total input capacitance is very low since sections of the converter that are not sampling the signal are isolated from the input by transmission gates.

## Voltage Reference

The CDK1305 requires the use of a single external voltage reference for driving the high side of the reference ladder. It must be within the range of 3V to 5V. The lower side of the ladder is typically tied to AGND (0.0V), but can be run up to 2.0V with a second reference. The analog input voltage range will track the total voltage difference measured between the ladder sense lines, VRHS and VRLS.

Force and sense taps are provided to ensure accurate and stable setting of the upper and lower ladder sense line voltages across part-to-part and temperature variations. By using the configuration shown in Figure 4, offset and gain errors of less than  $\pm 2$  LSB can be obtained.

In cases where wider variations in offset and gain can be tolerated, VREF can be tied directly to VRHF, and AGND can be tied directly to VRLF as shown in Figure 5. Decouple force and sense lines to AGND with a 0.01 $\mu$ F capacitor (chip cap preferred) to minimize high-frequency noise injection.

If this simplified configuration is used, the following considerations should be taken into account. The reference ladder circuit shown in Figure 5 is a simplified representation of the actual reference ladder with force and sense taps shown. Due to the actual internal structure of the ladder, the voltage drop from VRHF to VRHS is not equivalent to the voltage drop from VRLF to VRLS.

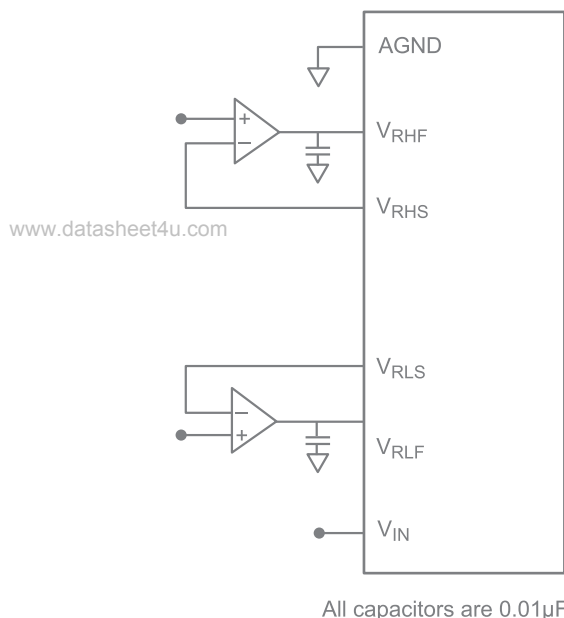


Figure 4. Ladder Force/Sense Circuit

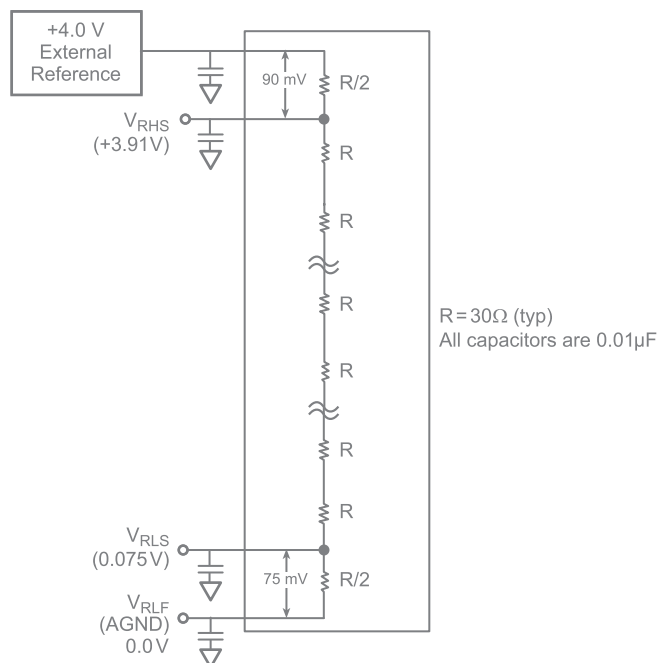


Figure 5. Reference Ladder Circuit

Typically, the top side voltage drop for  $V_{RHF}$  to  $V_{RHS}$  will equal:

$$V_{RHF} - V_{RHS} = 2.25 \% \text{ of } (V_{RHF} - V_{RLF}) \text{ (typical)}$$

and the bottom side voltage drop for  $V_{RLS}$  to  $V_{RLF}$  will equal:

$$V_{RLS} - V_{RLF} = 1.9 \% \text{ of } (V_{RHF} - V_{RLF}) \text{ (typical)}$$

Figure 5 shows an example of expected voltage drops for

a specific case.  $V_{REF}$  of 4.0V is applied to  $V_{RHF}$ , and  $V_{RLF}$  is tied to AGND. A 90mV drop is seen at  $V_{RHS}$  ( $= 3.91V$ ), and a 75mV increase is seen at  $V_{RLS}$  ( $= 0.075V$ ).

## Analogue Input

$V_{IN}$  is the analogue input. The input voltage range is from  $V_{RLS}$  to  $V_{RHS}$  (typically 4.0V) and will scale proportionally with respect to the voltage reference. (See Voltage Reference section.)

The drive requirements for the analogue inputs are very minimal when compared to most other converters due to the CDK1305 extremely low input capacitance of only 5pF and very high input resistance of 50kΩ.

The analogue input should be protected through a series resistor and diode clamping circuit as shown in Figure 7.

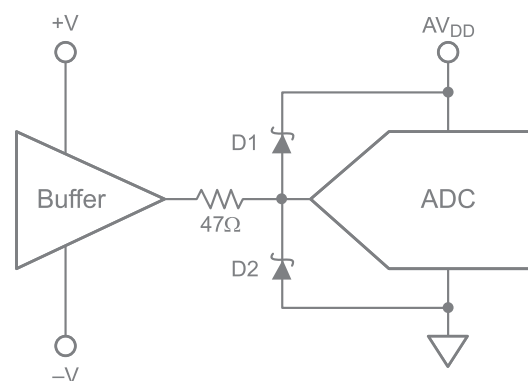


Figure 6. Recommended Input Protection Circuit

## Calibration

The CDK1305 uses an auto-calibration scheme to ensure 10-bit accuracy over time and temperature. Gain and offset errors are continually adjusted to 10-bit accuracy during device operation. This process is completely transparent to the user.

Upon powerup, the CDK1305 begins its calibration algorithm. In order to achieve the calibration accuracy required, the offset and gain adjustment step size is a fraction of a 10-bit LSB. Since the calibration algorithm is an oversampling process, a minimum of 10,000 clock cycles are required. This results in a minimum calibration time upon powerup of 250µs (for a 40MHz clock). Once calibrated, the CDK1305 remains calibrated over time and temperature.

Since the calibration cycles are initiated on the rising edge of the clock, the clock must be continuously applied for the CDK1305 to remain in calibration.



Input Protection

All I/O pads are protected with an on-chip protection circuit shown in Figure 6. This circuit provides ESD robustness to 3.5kV and prevents latch-up under severe discharge conditions without degrading analog transition times.

www.datasheet4u.com

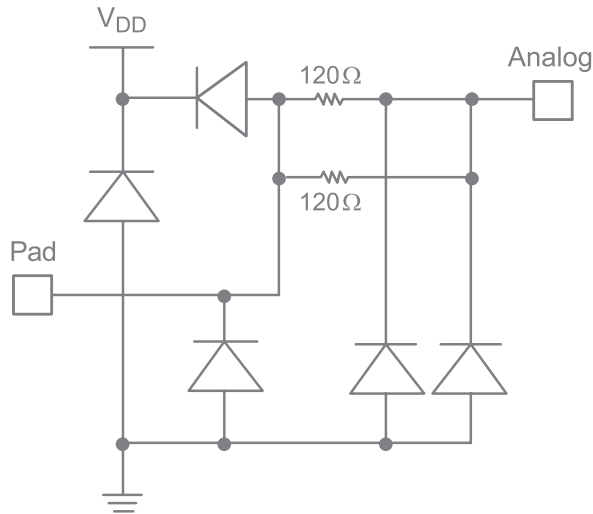


Figure 7. On-Chip Protection Circuit

Power Supply Sequencing Considerations

All logic inputs should be held low until power to the device has settled to the specific tolerances. Avoid power decoupling networks with large time constants that could delay VDD power to the device.

Clock Input

The CDK1305 is driven from a single-ended TTL-input clock. Because the pipelined architecture operates on the rising edge of the clock input, the device can operate over a wide range of input clock duty cycles without degrading the dynamic performance.

Digital Outputs

The digital outputs (D0–D10) are driven by a separate supply (OVDD) ranging from +3 V to +5 V. This feature makes it possible to drive the CDK1305 TTL/CMOS compatible outputs with the user’s logic system supply. The format of the output data (D0–D9) is straight binary. (See Table 3.) The outputs are latched on the rising edge of CLK. These outputs can be switched into a tri-state mode by bringing EN high.

Table 3. Output Data Information

| Analog Input    | Overrange D10 | Output Code D9-D0   |
|-----------------|---------------|---------------------|
| +F.S. + 1/2 LSB | 1             | 1 1 1 1 1 1 1 1 1 1 |
| +F.S. –1/2 LSB  | 0             | 1 1 1 1 1 1 1 1 1 0 |
| +1/2 F.S.       | 0             | 0 0 0 0 0 0 0 0 0 0 |
| +1/2 LSB        | 0             | 0 0 0 0 0 0 0 0 0 0 |
| 0.0V            | 0             | 0 0 0 0 0 0 0 0 0 0 |

(Ø indicates the flickering bit between logic 0 and 1.)

Overrange Output


The Overrange Output (D10) is an indication that the analog input signal has exceeded the positive fullscale input voltage by 1 LSB. When this condition occurs, D10 will switch to logic 1. All other data outputs (D0 to D9) will remain at logic 1 as long as D10 remains at logic 1.

This feature makes it possible to include the CDK1305 in higher resolution systems.

Evaluation Board


The TBD evaluation board is available to aid designers in demonstrating the full performance of the CDK1305. This board includes a reference circuit, clock driver circuit, output data latches, and an on-board reconstruction of the digital data. An application note describing the operation of this board, as well as information on the testing of the CDK1305, is also available. Contact the factory for price and availability.

CDK1305 10-bit, 40 MSps 175mW A/D Converter REV 1A




Mechanical Dimensions

SOIC-28 Package

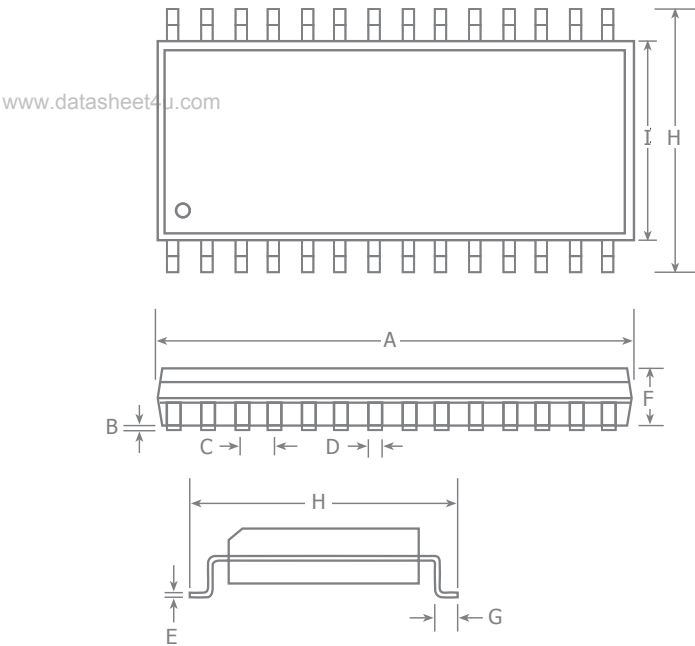

| Symbol | Inches    |        | Millimeters |       |
|--------|-----------|--------|-------------|-------|
|        | Min       | Max    | Min         | Max   |
| A      | 0.699     | 0.709  | 17.75       | 18.01 |
| B      | 0.005     | 0.011  | 0.13        | 0.28  |
| C      | 0.050 Typ |        | 1.27 BSC    |       |
| D      | 0.018 Typ |        | 0.46 BSC    |       |
| E      | 0.0077    | 0.0083 | 0.20        | 0.21  |
| F      | 0.090     | 0.096  | 2.29        | 2.44  |
| G      | 0.031     | 0.039  | 0.79        | 0.99  |
| H      | 0.396     | 0.416  | 10.06       | 10.57 |
| I      | 0.286     | 0.292  | 7.26        | 7.42  |

TQFP-32 Package

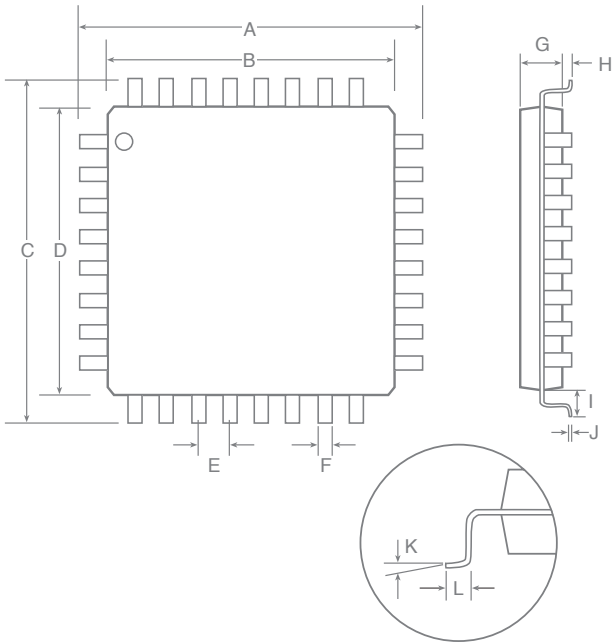

| Symbol | Inches    |       | Millimeters |      |
|--------|-----------|-------|-------------|------|
|        | Min       | Max   | Min         | Max  |
| A      | 0.346     | 0.362 | 8.80        | 9.20 |
| B      | 0.272     | 0.280 | 6.90        | 7.10 |
| C      | 0.346     | 0.362 | 8.80        | 9.20 |
| D      | 0.272     | 0.280 | 6.90        | 7.10 |
| E      | 0.031 Typ |       | 0.80 BSC    |      |
| F      | 0.012     | 0.016 | 0.30        | 0.40 |
| G      | 0.053     | 0.057 | 1.35        | 1.45 |
| H      | 0.002     | 0.006 | 0.05        | 0.15 |
| I      | 0.037     | 0.041 | 0.95        | 1.05 |
| J      | 0.007     |       | 0.17        |      |
| K      | 0°        | 7°    | 0°          | 7°   |
| L      | 0.020     | 0.030 | 0.50        | 0.75 |

For additional information regarding our products, please visit CADEKA at: [cadeka.com](http://cadeka.com)

**CADEKA Headquarters** Loveland, Colorado  
T: 970.663.5452  
T: 877.663.5452 (toll free)

CADEKA, the CADEKA logo design, COMLINEAR and the COMLINEAR logo design are trademarks or registered trademarks of CADEKA Microcircuits LLC. All other brand and product names may be trademarks of their respective companies.

CADEKA reserves the right to make changes to any products and services herein at any time without notice. CADEKA does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by CADEKA; nor does the purchase, lease, or use of a product or service from CADEKA convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual property rights of CADEKA or of third parties.

Copyright ©2008 by CADEKA Microcircuits LLC. All rights reserved.

