

SMD Power Inductor CDRH70D43DMN



sumida

Under Development



Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 7.3 × 7.3 × 4.5 mm Max.
- Product weight: 0.75g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -40°C~+105°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+105°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging



Applications

- Ideally used in Hard disk-related, power supply for TV and game machine etc.


Dimension - [mm]

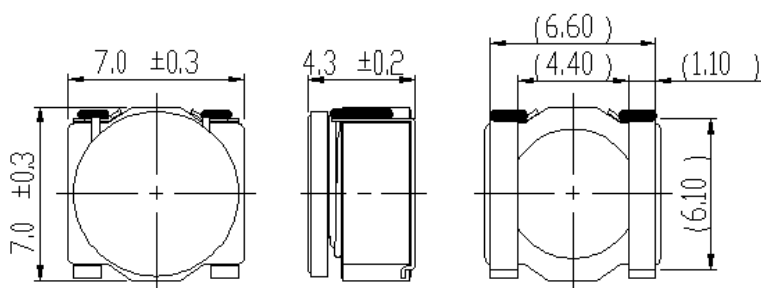

Land pattern and Schematics - [mm]




(1.2 μH~10 μH)



(15 μH~47 μH)

SMD Power Inductor

CDRH70D43DMN



Under Development

Electrical Characteristics


Part Name	Stamp	Inductance [within] ※ 1	D.C.R. (mΩ) [Max.] (Typ.)	Saturation current (A) ※2		Temperature rise Current (A) ※3
				at 20℃	at 105℃	
CDRH70D43DMNNP-1R2PC	1R2	1.2 μH ± 25%	13.7(11)	11.40	9.00	7.80
CDRH70D43DMNNP-2R4PC	2R4	2.4 μH ± 25%	15.6(12.5)	8.30	6.60	6.50
CDRH70D43DMNNP-3R3PC	3R3	3.3 μH ± 25%	19.4(15.5)	7.20	5.80	5.60
CDRH70D43DMNNP-4R3PC	4R3	4.3 μH ± 25%	23.8(19)	6.40	5.00	4.70
CDRH70D43DMNNP-6R2MC	6R2	6.2 μH ± 20%	35.0(28)	5.10	4.20	3.80
CDRH70D43DMNNP-100MC	100	10.0 μH ± 20%	52.5(42)	4.00	3.10	2.80
CDRH70D43DMNNP-150MC	150	15.0 μH ± 20%	72.5(58)	3.30	2.70	2.30
CDRH70D43DMNNP-220MC	220	22.0 μH ± 20%	106(85)	2.70	2.20	1.80
CDRH70D43DMNNP-330MC	330	33.0 μH ± 20%	137(110)	2.20	1.70	1.60
CDRH70D43DMNNP-470MC	470	47.0 μH ± 20%	200(160)	1.85	1.50	1.30

※1. Inductance Measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 70% of it's nominal value.

※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t = 40^{\circ}\text{C}$ ($T_a = 20^{\circ}\text{C}$).

SMD Power Inductor CDRH70D43DMN













sumida

Under Development

Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

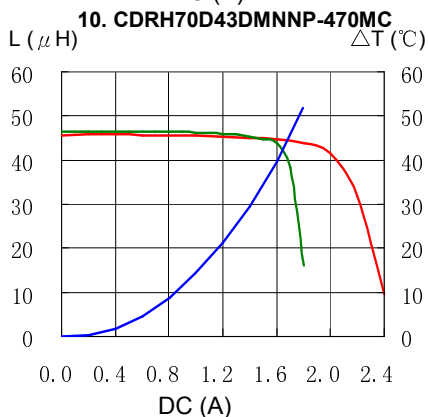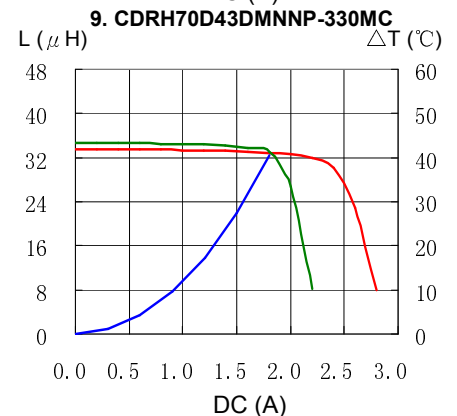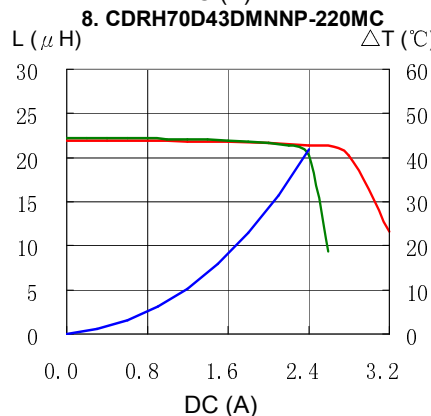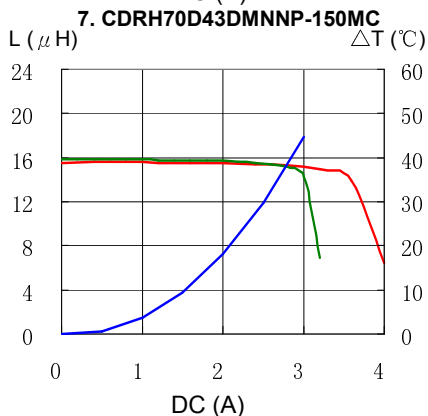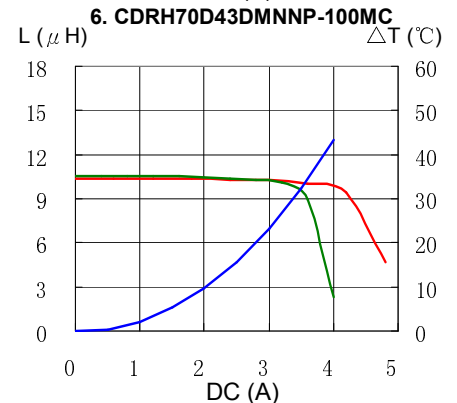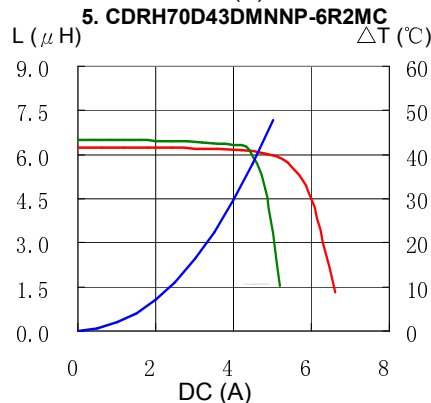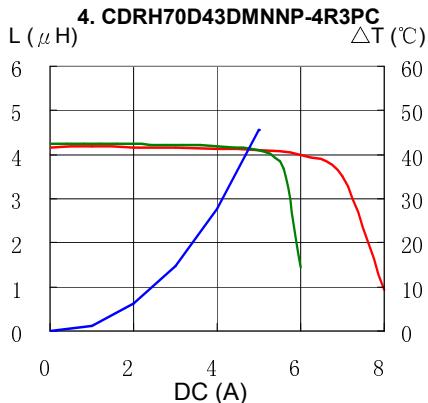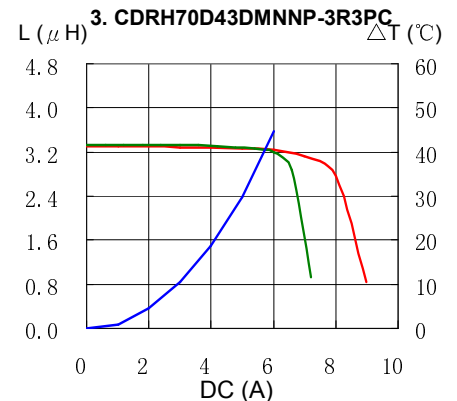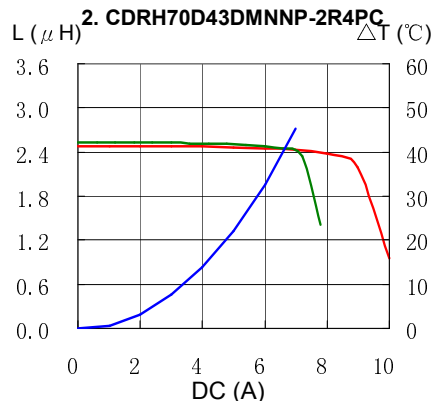
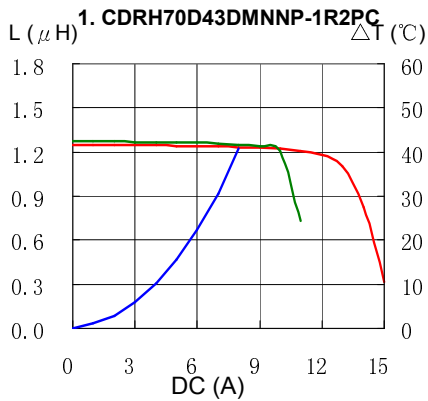


SMD Power Inductor CDRH70D43DMN



Under Development

Solder Reflow Condition

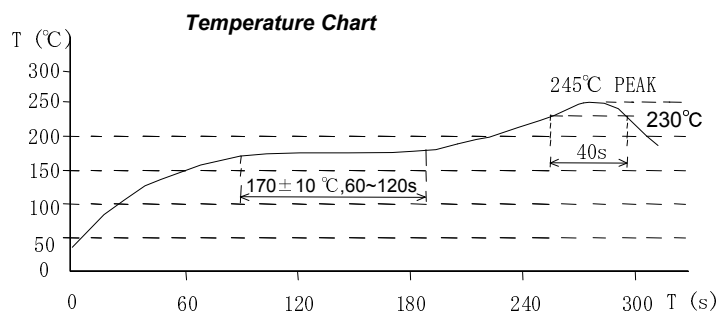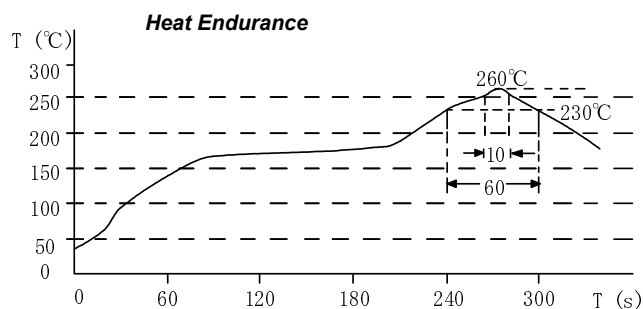

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel. +852-2880-6688
FAX. +852-2565-9600
sales@hk.sumida.com

Tokyo

Tel. +81-3-5202-7112
FAX. +81-3-5202-7105
sales@jp.sumida.com

Chicago

Tel. +1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel. +86-021-5836-3299
FAX. +86-021-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel. +82-2-6237-0777
FAX. +82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel. +49-8591-937-0
FAX. +49-8591-937-103
contact@sumida-eu.com

Shenzhen

Tel. +86-755-8291-0228
FAX. +86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel. +65-6296-3388
FAX. +65-6296-3390
sales@sg.sumida.com

Neumarkt

Tel. +49-9181-4509-110
FAX. +49-9181-4509-310
info@comp@eu.sumida.com

Taipei

Tel. +886-2-8751-2737
FAX. +886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel. +1-408-321-9660
FAX. +1-408-321-9308
sales@us.sumida.com