



# CEP06N7/CEB06N7 CEF06N7




## N-Channel Enhancement Mode Field Effect Transistor

PRELIMINARY

### FEATURES

| Type    | V <sub>DSS</sub> | R <sub>DS(ON)</sub> | I <sub>D</sub>  | @V <sub>GS</sub> |
|---------|------------------|---------------------|-----------------|------------------|
| CEP06N7 | 700V             | 2Ω                  | 6A              | 10V              |
| CEB06N7 | 700V             | 2Ω                  | 6A              | 10V              |
| CEF06N7 | 700V             | 2Ω                  | 6A <sup>d</sup> | 10V              |

- Super high dense cell design for extremely low R<sub>DS(ON)</sub>.
- High power and current handling capability.
- Lead-free plating ; RoHS compliant.



### ABSOLUTE MAXIMUM RATINGS $T_C = 25^{\circ}\text{C}$ unless otherwise noted

| Parameter                                                                    | Symbol                            | Limit      |                 | Units |
|------------------------------------------------------------------------------|-----------------------------------|------------|-----------------|-------|
|                                                                              |                                   | TO-220/263 | TO-220F         |       |
| Drain-Source Voltage                                                         | V <sub>DS</sub>                   | 700        |                 | V     |
| Gate-Source Voltage                                                          | V <sub>GS</sub>                   | ±30        |                 | V     |
| Drain Current-Continuous @ T <sub>C</sub> = 25 C<br>@ T <sub>C</sub> = 100°C | I <sub>D</sub>                    | 6          | 6               | A     |
|                                                                              |                                   | 4          | 4 <sup>d</sup>  | A     |
| Drain Current-Pulsed <sup>a</sup>                                            | I <sub>DM</sub> <sup>e</sup>      | 24         | 24 <sup>d</sup> | A     |
| Maximum Power Dissipation @ T <sub>C</sub> = 25°C<br>- Derate above 25°C     | P <sub>D</sub>                    | 150        | 48              | W     |
|                                                                              |                                   | 1          | 0.3             | W/°C  |
| Single Pulsed Avalanche Energy <sup>h</sup>                                  | E <sub>AS</sub>                   | 125        |                 | mJ    |
| Single Pulsed Avalanche Current <sup>h</sup>                                 | I <sub>AS</sub>                   | 5          |                 | A     |
| Operating and Store Temperature Range                                        | T <sub>J</sub> , T <sub>stg</sub> | -55 to 175 |                 | °C    |

### Thermal Characteristics

| Parameter                               | Symbol           | Limit |     | Units |
|-----------------------------------------|------------------|-------|-----|-------|
| Thermal Resistance, Junction-to-Case    | R <sub>θJC</sub> | 1     | 3.1 | °C/W  |
| Thermal Resistance, Junction-to-Ambient | R <sub>θJA</sub> | 62.5  | 65  | °C/W  |

This is preliminary information on a new product in development now .  
Details are subject to change without notice .

Rev 1. 2012.May  
<http://www.cetsemi.com>



# CEP06N7/CEB06N7


## CEF06N7

### Electrical Characteristics $T_C = 25^\circ\text{C}$ unless otherwise noted


| Parameter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Symbol       | Test Condition                                                   | Min | Typ  | Max  | Units    |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------------------------------------------------------------------|-----|------|------|----------|
| Off Characteristics                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |              |                                                                  |     |      |      |          |
| Drain-Source Breakdown Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | $BV_{DSS}$   | $V_{GS} = 0V, I_D = 250\mu A$                                    | 700 |      |      | V        |
| Zero Gate Voltage Drain Current                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | $I_{DSS}$    | $V_{DS} = 700V, V_{GS} = 0V$                                     |     |      | 1    | $\mu A$  |
| Gate Body Leakage Current, Forward                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | $I_{GSSF}$   | $V_{GS} = 30V, V_{DS} = 0V$                                      |     |      | 100  | nA       |
| Gate Body Leakage Current, Reverse                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | $I_{GSSR}$   | $V_{GS} = -30V, V_{DS} = 0V$                                     |     |      | -100 | nA       |
| On Characteristics <sup>b</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |              |                                                                  |     |      |      |          |
| Gate Threshold Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | $V_{GS(th)}$ | $V_{GS} = V_{DS}, I_D = 250\mu A$                                | 2   |      | 4    | V        |
| Static Drain-Source On-Resistance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | $R_{DS(on)}$ | $V_{GS} = 10V, I_D = 3A$                                         |     | 1.65 | 2    | $\Omega$ |
| Gate input resistance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | $R_g$        | f=1MHz, open Drain                                               |     | 2    |      | $\Omega$ |
| Dynamic Characteristics <sup>c</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |              |                                                                  |     |      |      |          |
| Input Capacitance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | $C_{iss}$    | $V_{DS} = 25V, V_{GS} = 0V,$<br>f = 1.0 MHz                      |     | 1470 |      | pF       |
| Output Capacitance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | $C_{oss}$    |                                                                  |     | 110  |      | pF       |
| Reverse Transfer Capacitance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | $C_{rss}$    |                                                                  |     | 15   |      | pF       |
| Switching Characteristics <sup>c</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |              |                                                                  |     |      |      |          |
| Turn-On Delay Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | $t_{d(on)}$  | $V_{DD} = 560V, I_D = 6A,$<br>$V_{GS} = 10V, R_{GEN} = 25\Omega$ |     | 27   | 54   | ns       |
| Turn-On Rise Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | $t_r$        |                                                                  |     | 73   | 146  | ns       |
| Turn-Off Delay Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | $t_{d(off)}$ |                                                                  |     | 87   | 174  | ns       |
| Turn-Off Fall Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | $t_f$        |                                                                  |     | 79   | 158  | ns       |
| Total Gate Charge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | $Q_g$        | $V_{DS} = 560V, I_D = 6A,$<br>$V_{GS} = 10V$                     |     | 29   | 38   | nC       |
| Gate-Source Charge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | $Q_{gs}$     |                                                                  |     | 5    |      | nC       |
| Gate-Drain Charge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | $Q_{gd}$     |                                                                  |     | 9    |      | nC       |
| Drain-Source Diode Characteristics and Maximun Ratings                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |              |                                                                  |     |      |      |          |
| Drain-Source Diode Forward Current                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | $I_S^f$      |                                                                  |     |      | 6    | A        |
| Drain-Source Diode Forward Voltage <sup>b</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | $V_{SD}$     | $V_{GS} = 0V, I_S = 6A^g$                                        |     |      | 1.5  | V        |
| Notes :<br>a.Repetitive Rating : Pulse width limited by maximum junction temperature .<br>b.Pulse Test : Pulse Width $\leq 300\mu s$ , Duty Cycle $\leq 2\%$ .<br>c.Guaranteed by design, not subject to production testing.<br>d.Limited only by maximum temperature allowed .<br>e.Pulse width limited by safe operating area .<br>f.Full package $I_{S(max)} = 3.3A$ .<br>g.Full package $V_{SD}$ test condition $I_S = 3.3A$ .<br>h.L = 10mH, $I_{AS} = 5A, V_{DD} = 50V, R_G = 25\Omega$ , Starting $T_J = 25\text{ }^{\circ}C$ . |              |                                                                  |     |      |      |          |




# CEP06N7/CEB06N7 CEF06N7

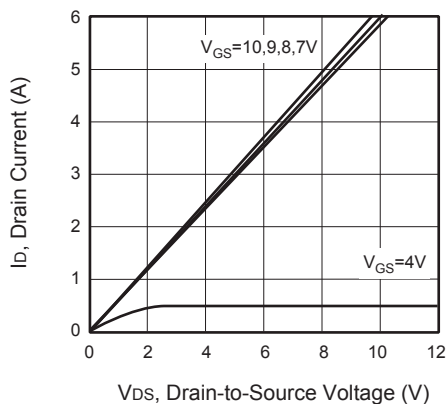


**Figure 1. Output Characteristics**

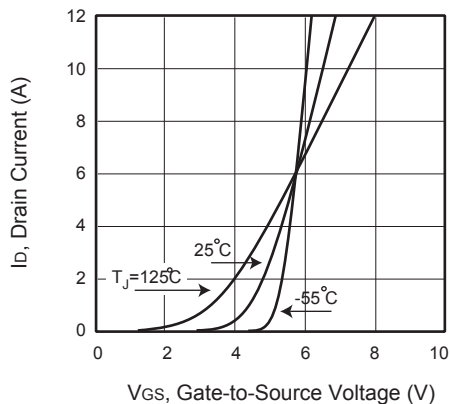


**Figure 2. Transfer Characteristics**

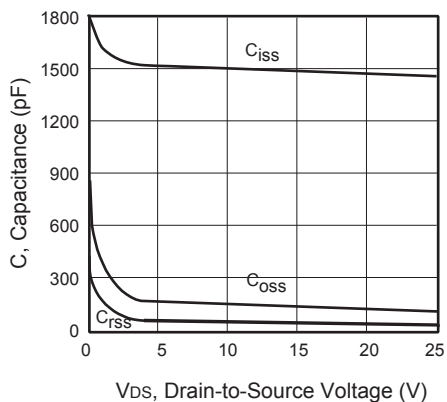


**Figure 3. Capacitance**

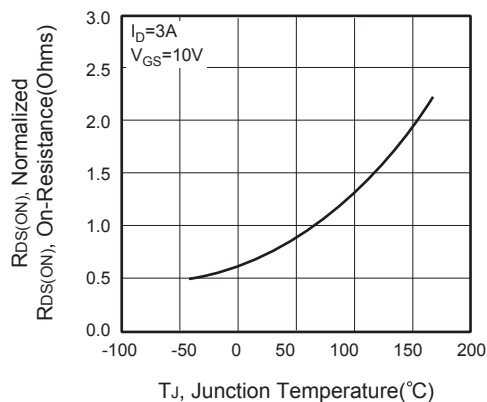

**Figure 4. On-Resistance Variation with Temperature**

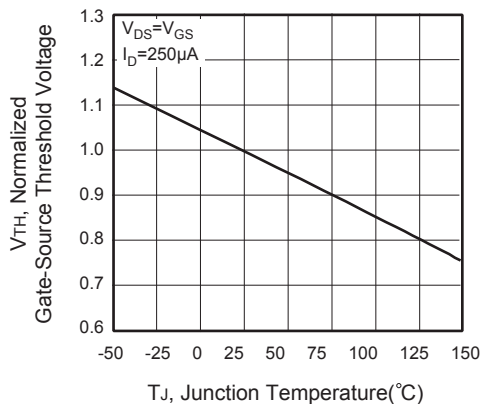

**Figure 5. Gate Threshold Variation with Temperature**

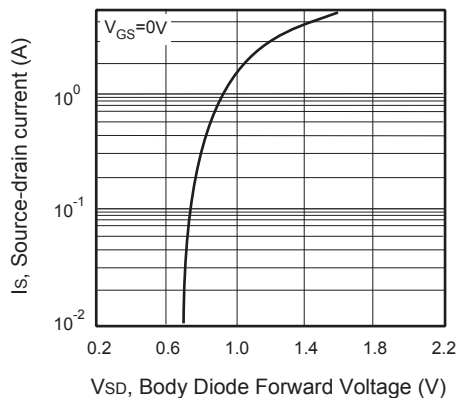

**Figure 6. Body Diode Forward Voltage Variation with Source Current**



# CEP06N7/CEB06N7 CEF06N7

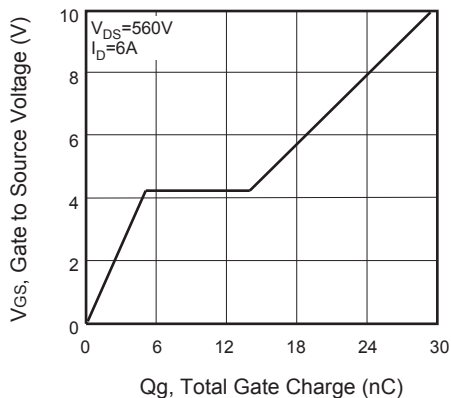


Figure 7. Gate Charge

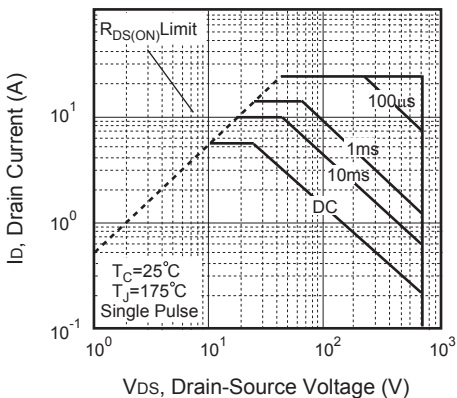


Figure 8. Maximum Safe Operating Area

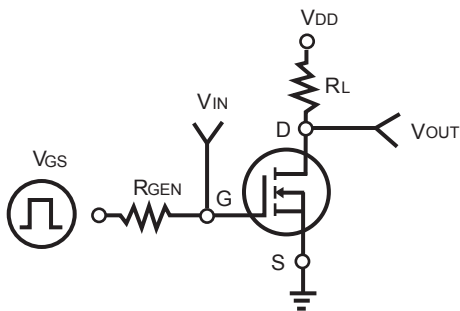


Figure 9. Switching Test Circuit

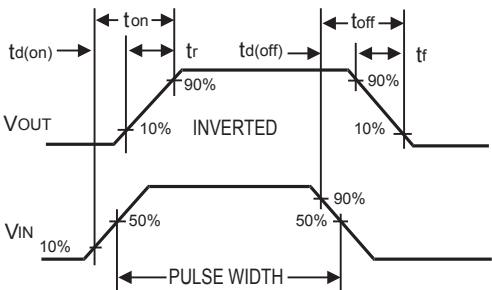


Figure 10. Switching Waveforms

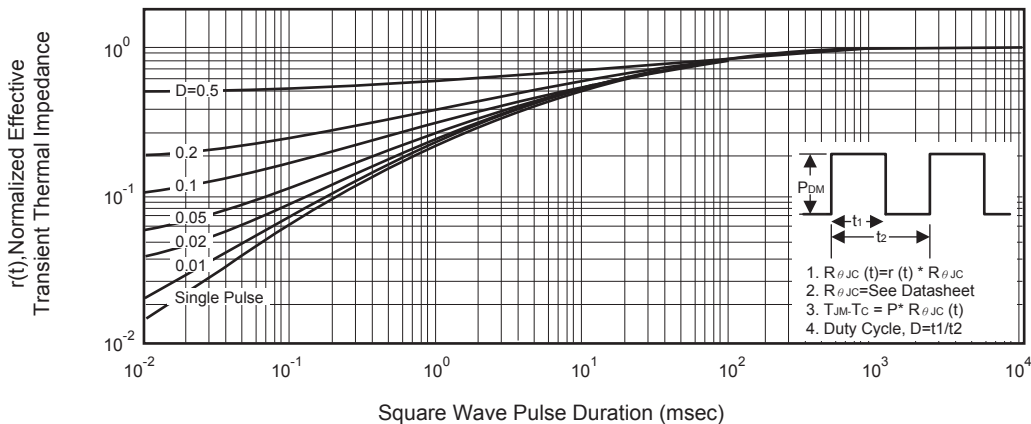


Figure 11. Normalized Thermal Transient Impedance Curve