

## OVERVIEW

The CF5015 series are 2.5V operation crystal oscillator ICs. They are available for frequencies up to 60MHz. The product lineup consists of AL× series for 2.5V exclusive use and BL× series compliant with 2.5V to 5V. The built-in oscillator capacitor of AL× series is large, so that AL× series contribute to improve the frequency stability. For the BL× series, the current consumption and drive level reduced so that they can realize the characteristics easier to design small-sized crystal oscillators. The oscillator circuit of each version is simply constructed, so that it can realize the crystal oscillator with excellent phase noise characteristics. Even if the valued characteristics differ due to the application or the purpose, the selecting from these series for different purposes allows the optimization.

## FEATURES

- Operating supply voltage range
  - CF5015AL×: 2.25 to 2.75V
  - CF5015BL×: 2.25 to 5.5V
- Up to 60MHz oscillation frequency range
- – 40 to 85°C operating temperature range
- Oscillation capacitors built-in
  - CF5015AL×:  $C_G = 18\text{pF}$ ,  $C_D = 18\text{pF}$
  - CF5015BL×:  $C_G = 4\text{pF}$ ,  $C_D = 8\text{pF}$
- Inverter amplifier feedback resistor built-in
- Standby function
  - High impedance in standby mode, oscillator stops
- Low standby current
  - Power-saving pull-up resistor built-in
- $f_O$ ,  $f_O/2$ ,  $f_O/4$ ,  $f_O/8$ , or  $f_O/16$  output frequency, determined by internal connection
- CMOS output duty level (1/2VDD)
- Molybdenum-gate CMOS process
- Chip form (CF5015×L×)

## SERIES CONFIGURATION

Version	Operating supply voltage range [V]	Recommended oscillation frequency range <sup>*1</sup> [MHz]					Built-in capacitance [pF]		Output frequency	Standby mode	
		2.5V operation		3V operation		5V operation				Oscillator stop function	Output state
		C <sub>L</sub> = 15pF	C <sub>L</sub> = 30pF	C <sub>L</sub> = 15pF	C <sub>L</sub> = 30pF	C <sub>L</sub> = 30pF	C <sub>G</sub>	C <sub>D</sub>			
CF5015AL1	2.25 to 2.75	4 to 60	4 to 50	–	–	–	18	18	f <sub>O</sub> <sup>*2</sup>	Yes	Hi-Z
CF5015AL2									f <sub>O</sub> /2		
CF5015AL3									f <sub>O</sub> /4		
CF5015AL4									f <sub>O</sub> /8		
CF5015AL5									f <sub>O</sub> /16		
CF5015BL1	2.25 to 3.6 4.5 to 5.5	12 to 60	12 to 50	12 to 60	12 to 50	12 to 60	4	8	f <sub>O</sub> <sup>*2</sup>	Yes	Hi-Z
CF5015BL2									f <sub>O</sub> /2		
CF5015BL3									f <sub>O</sub> /4		
CF5015BL4									f <sub>O</sub> /8		
CF5015BL5									f <sub>O</sub> /16		

\*1. The recommended oscillation frequency is a yardstick value derived from the crystal used for NPC characteristics authentication. However, the oscillator frequency band is not guaranteed. Specifically, the characteristics can vary greatly due to crystal characteristics and mounting conditions, so the oscillation characteristics of components must be carefully evaluated.

\*2. Oscillation frequency


## ORDERING INFORMATION

Device	Package
CF5015×L×–2	Chip form

PAD LAYOUT

(Unit:  $\mu\text{m}$ )


www.datasheet4u.com

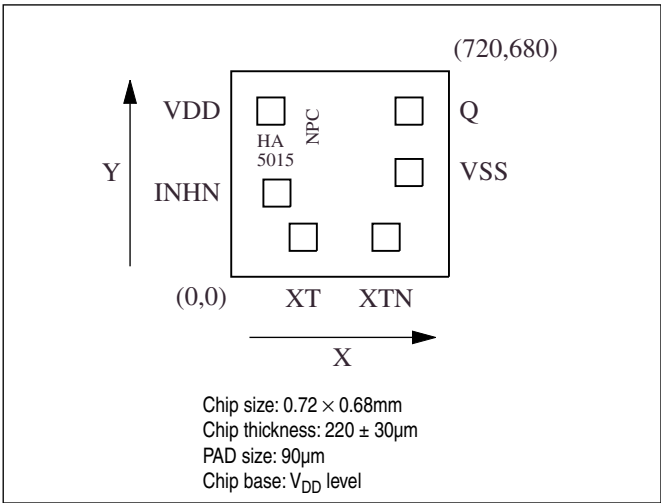

PIN DESCRIPTION and PAD DIMENSIONS

Name	I/O	Description	Pad dimensions [ $\mu\text{m}$ ]	
			X	Y
INHN	I	Output state control input. High impedance when LOW (oscillator stops). Power-saving pull-up resistor built-in.	151	277
XT	I	Amplifier input	238	131
XTN	O	Amplifier output	512	131
VSS	-	Ground	588	345
Q	O	Output. Output frequency ( $f_0$ , $f_0/2$ , $f_0/4$ , $f_0/8$ , $f_0/16$ ) determined by internal connection	588	548
VDD	-	Supply voltage	131	548

BLOCK DIAGRAM

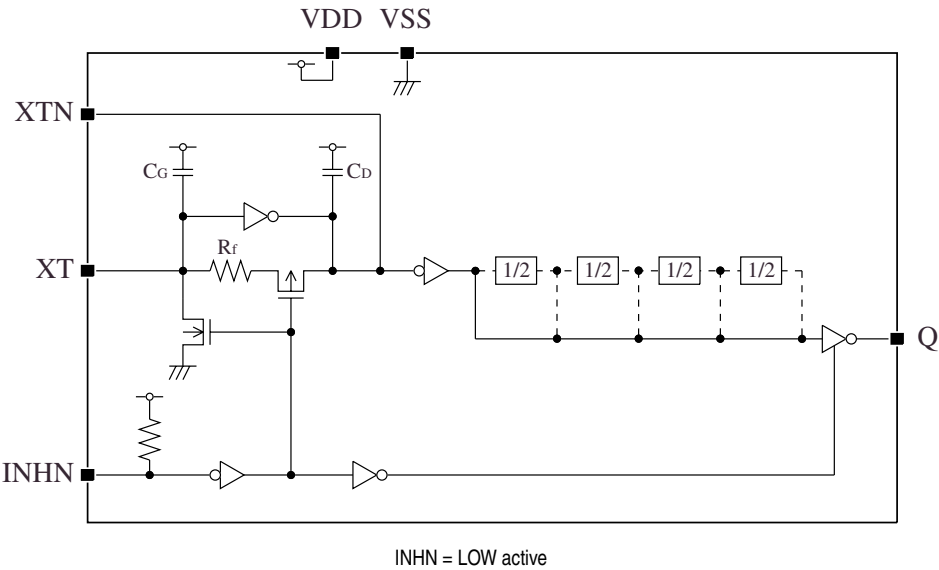

## SPECIFICATIONS

### Absolute Maximum Ratings

 $V_{SS} = 0V$ 
[www.datasheet4u.com](http://www.datasheet4u.com)

Parameter	Symbol	Condition	Rating	Unit
Supply voltage range	$V_{DD}$		-0.5 to +7.0	V
Input voltage range	$V_{IN}$		-0.5 to $V_{DD} + 0.5$	V
Output voltage range	$V_{OUT}$		-0.5 to $V_{DD} + 0.5$	V
Operating temperature range	$T_{opr}$		-40 to +85	°C
Storage temperature range	$T_{STG}$		-65 to +150	°C
Output current	$I_{OUT}$		12	mA

### Recommended Operating Conditions

#### 2.5V operation (CF5015AL×/CF5015BL×)

 $V_{SS} = 0V$ 

Parameter	Symbol	Condition		Rating	Unit
Supply voltage range	V <sub>DD</sub>			2.25 to 2.75	V
Input voltage range	V <sub>IN</sub>			V <sub>SS</sub> to V <sub>DD</sub>	V
Operating temperature range	T <sub>OPR</sub>			−40 to +85	°C
Oscillation frequency range	f <sub>O</sub>	CF5015AL×		4 to 60	MHz
		CF5015BL×		12 to 60	MHz
Output frequency range	f <sub>OUT</sub>	CF5015AL×	C <sub>L</sub> ≤ 15pF	0.25 to 60	MHz
			C <sub>L</sub> ≤ 30pF	0.25 to 50	MHz
		CF5015BL×	C <sub>L</sub> ≤ 15pF	0.75 to 60	MHz
			C <sub>L</sub> ≤ 30pF	0.75 to 50	MHz

#### 3V operation (CF5015BL×)

 $V_{SS} = 0V$ 

Parameter	Symbol	Condition	Rating	Unit
Supply voltage range	$V_{DD}$		2.7 to 3.6	V
Input voltage range	$V_{IN}$		$V_{SS}$ to $V_{DD}$	V
Operating temperature range	$T_{OPR}$		-40 to +85	°C
Oscillation frequency range	$f_O$		12 to 60	MHz
Output frequency range	$f_{OUT}$	$C_L \leq 15pF$	0.75 to 60	MHz
		$C_L \leq 30pF$	0.75 to 50	MHz

#### 5V operation (CF5015BL×)

 $V_{SS} = 0V$ 

Parameter	Symbol	Condition	Rating	Unit
Supply voltage range	$V_{DD}$		4.5 to 5.5	V
Input voltage range	$V_{IN}$		$V_{SS}$ to $V_{DD}$	V
Operating temperature range	$T_{OPR}$		-40 to +85	°C
Oscillation frequency range	$f_O$		12 to 60	MHz
Output frequency range	$f_{OUT}$	$C_L \leq 30pF$	0.75 to 60	MHz

## Electrical Characteristics

## 2.5V operation (CF5015AL×/CF5015BL×)

$V_{DD} = 2.25$  to  $2.75V$ ,  $V_{SS} = 0V$ ,  $T_a = -40$  to  $+85^{\circ}C$  unless otherwise noted.

www.datasheet4u.com

Parameter	Symbol	Condition	Rating			Unit
			min	typ	max	
HIGH-level output voltage	$V_{OH}$	Q: Measurement cct 1, $V_{DD} = 2.25V$ , $I_{OH} = 4mA$	1.65	1.95	–	V
LOW-level output voltage	$V_{OL}$	Q: Measurement cct 1, $V_{DD} = 2.25V$ , $I_{OL} = 4mA$	–	0.3	0.4	V
HIGH-level input voltage	$V_{IH}$	INH N	$0.7V_{DD}$	–	–	V
LOW-level input voltage	$V_{IL}$	INH N	–	–	$0.3V_{DD}$	V
Output leakage current	$I_Z$	Q: Measurement cct 2, INHN = LOW	$V_{OH} = V_{DD}$	–	–	10 $\mu A$
			$V_{OL} = V_{SS}$	–	–	10 $\mu A$
Current consumption	$I_{DD}$	Measurement cct 3, load cct 1, INHN = open, $C_L = 15pF$ , $f = 60MHz$	CF5015AL1	–	5.5	11 mA
			CF5015AL2	–	4	8 mA
			CF5015AL3	–	3	6 mA
			CF5015AL4	–	2.5	5 mA
			CF5015AL5	–	2	4 mA
			CF5015BL1	–	4.5	9 mA
			CF5015BL2	–	3	6 mA
			CF5015BL3	–	2	4 mA
			CF5015BL4	–	1.5	3 mA
			CF5015BL5	–	1	2 mA
Standby current	$I_{ST}$	Measurement cct 3, INHN = LOW	–	–	3	$\mu A$
INH N pull-up resistance	$R_{UP1}$	Measurement cct 4	2	6	12	$M\Omega$
	$R_{UP2}$		20	100	200	$k\Omega$
Feedback resistance	$R_f$	Measurement cct 5	100	300	600	$k\Omega$
Built-in capacitance	$C_G$	Design value. A monitor pattern on a wafer is tested.	CF5015AL×	15.3	18	20.7 pF
			CF5015BL×	3.4	4	4.6 pF
	$C_D$	Design value. A monitor pattern on a wafer is tested.	CF5015AL×	15.3	18	20.7 pF
			CF5015BL×	6.8	8	9.2 pF

## CF5015 series

### 3V operation (CF5015BL×)

$V_{DD} = 2.7$  to  $3.6V$ ,  $V_{SS} = 0V$ ,  $T_a = -40$  to  $+85^{\circ}C$  unless otherwise noted.

Parameter	Symbol	Condition	Rating			Unit
			min	typ	max	
HIGH-level output voltage	$V_{OH}$	Q: Measurement cct 1, $V_{DD} = 2.7V$ , $I_{OH} = 4mA$	2.1	2.4	–	V
LOW-level output voltage	$V_{OL}$	Q: Measurement cct 1, $V_{DD} = 2.7V$ , $I_{OL} = 4mA$	–	0.3	0.4	V
HIGH-level input voltage	$V_{IH}$	INH N	$0.7V_{DD}$	–	–	V
LOW-level input voltage	$V_{IL}$	INH N	–	–	$0.3V_{DD}$	V
Output leakage current	$I_Z$	Q: Measurement cct 2, INH N = LOW	$V_{OH} = V_{DD}$	–	–	10 $\mu A$
			$V_{OL} = V_{SS}$	–	–	10 $\mu A$
Current consumption	$I_{DD}$	Measurement cct 3, load cct 1, INH N = open, $C_L = 15pF$ , $f = 60MHz$	CF5015BL1	–	5.5	11 mA
			CF5015BL2	–	3	6 mA
			CF5015BL3	–	2	4 mA
			CF5015BL4	–	1.5	3 mA
			CF5015BL5	–	1	2 mA
Standby current	$I_{ST}$	Measurement cct 3, INH N = LOW	–	–	5	$\mu A$
INH N pull-up resistance	$R_{UP1}$	Measurement cct 4	1	4	10	$M\Omega$
	$R_{UP2}$		20	100	200	$k\Omega$
Feedback resistance	$R_f$	Measurement cct 5	100	300	600	$k\Omega$
Built-in capacitance	$C_G$	Design value. A monitor pattern on a wafer is tested.	3.4	4	4.6	pF
	$C_D$		6.8	8	9.2	pF

### 5V operation (CF5015BL×)

$V_{DD} = 4.5$  to  $5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = -40$  to  $+85^{\circ}C$  unless otherwise noted.

Parameter	Symbol	Condition	Rating			Unit
			min	typ	max	
HIGH-level output voltage	$V_{OH}$	Q: Measurement cct 1, $V_{DD} = 4.5V$ , $I_{OH} = 8mA$	3.9	4.2	–	V
LOW-level output voltage	$V_{OL}$	Q: Measurement cct 1, $V_{DD} = 4.5V$ , $I_{OL} = 8mA$	–	0.3	0.4	V
HIGH-level input voltage	$V_{IH}$	INH N	$0.7V_{DD}$	–	–	V
LOW-level input voltage	$V_{IL}$	INH N	–	–	$0.3V_{DD}$	V
Output leakage current	$I_Z$	Q: Measurement cct 2, INH N = LOW	$V_{OH} = V_{DD}$	–	–	10 $\mu A$
			$V_{OL} = V_{SS}$	–	–	10 $\mu A$
Current consumption	$I_{DD}$	Measurement cct 3, load cct 1, INH N = open, $C_L = 30pF$ , $f = 60MHz$	CF5015BL1	–	15	30 mA
			CF5015BL2	–	9.5	19 mA
			CF5015BL3	–	6.5	13 mA
			CF5015BL4	–	5	10 mA
			CF5015BL5	–	4	8 mA
Standby current	$I_{ST}$	Measurement cct 3, INH N = LOW	–	–	10	$\mu A$
INH N pull-up resistance	$R_{UP1}$	Measurement cct 4	0.5	2	8	$M\Omega$
	$R_{UP2}$		10	50	150	$k\Omega$
Feedback resistance	$R_f$	Measurement cct 5	100	300	600	$k\Omega$
Built-in capacitance	$C_G$	Design value. A monitor pattern on a wafer is tested.	3.4	4	4.6	pF
	$C_D$		6.8	8	9.2	pF

## Switching Characteristics

### 2.5V operation (CF5015AL×/CF5015BL×)

$V_{DD} = 2.25$  to  $2.75V$ ,  $V_{SS} = 0V$ ,  $T_a = -40$  to  $+85^\circ C$  unless otherwise noted.

www.datasheet4u.com

Parameter	Symbol	Condition		Rating			Unit
				min	typ	max	
Output rise time	$t_{r1}$	Measurement cct 3, load cct 1, $0.1V_{DD}$ to $0.9V_{DD}$	$C_L = 15pF$	–	3	6	ns
	$t_{r2}$		$C_L = 30pF$	–	5	10	
Output fall time	$t_{f1}$	Measurement cct 3, load cct 1, $0.9V_{DD}$ to $0.1V_{DD}$	$C_L = 15pF$	–	3	6	ns
	$t_{f2}$		$C_L = 30pF$	–	5	10	
Output duty cycle <sup>*1</sup>	Duty1	Measurement cct 3, load cct 1, $V_{DD} = 2.5V$ , $T_a = 25^\circ C$	$C_L = 15pF$ $f = 60MHz$	45	–	55	%
	Duty2		$C_L = 30pF$ $f = 50MHz$	45	–	55	%
Output disable delay time <sup>*2</sup>	$t_{PLZ}$	Measurement cct 6, load cct 1, $V_{DD} = 2.5V$ , $T_a = 25^\circ C$ , $C_L = 15pF$		–	–	100	ns
Output enable delay time <sup>*2</sup>	$t_{PZL}$			–	–	100	ns

\*1. The duty cycle characteristic is checked the sample chips of each production lot.

\*2. Oscillator stop function is built-in. When INHN goes LOW, normal output stops. When INHN goes HIGH, normal output is not resumed until after the oscillator start-up time has elapsed.

### 3V operation (CF5015BL×)

$V_{DD} = 2.7$  to  $3.6V$ ,  $V_{SS} = 0V$ ,  $T_a = -40$  to  $+85^\circ C$  unless otherwise noted.

Parameter	Symbol	Condition		Rating			Unit
				min	typ	max	
Output rise time	$t_{r1}$	Measurement cct 3, load cct 1, $0.1V_{DD}$ to $0.9V_{DD}$	$C_L = 15pF$	–	2.5	5	ns
	$t_{r2}$		$C_L = 30pF$	–	4	8	
Output fall time	$t_{f1}$	Measurement cct 3, load cct 1, $0.9V_{DD}$ to $0.1V_{DD}$	$C_L = 15pF$	–	2.5	5	ns
	$t_{f2}$		$C_L = 30pF$	–	4	8	
Output duty cycle <sup>*1</sup>	Duty1	Measurement cct 3, load cct 1, $V_{DD} = 3.0V$ , $T_a = 25^\circ C$	$C_L = 15pF$ $f = 60MHz$	45	–	55	%
	Duty2		$C_L = 30pF$ $f = 50MHz$	45	–	55	%
Output disable delay time <sup>*2</sup>	$t_{PLZ}$	Measurement cct 6, load cct 1, $V_{DD} = 3.0V$ , $T_a = 25^\circ C$ , $C_L = 15pF$		–	–	100	ns
Output enable delay time <sup>*2</sup>	$t_{PZL}$			–	–	100	ns

\*1. The duty cycle characteristic is checked the sample chips of each production lot.

\*2. Oscillator stop function is built-in. When INHN goes LOW, normal output stops. When INHN goes HIGH, normal output is not resumed until after the oscillator start-up time has elapsed.


**5V operation (CF5015BL×)**

$V_{DD} = 4.5$  to  $5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = -40$  to  $+85^{\circ}C$  unless otherwise noted.

Parameter	Symbol	Condition		Rating			Unit
				min	typ	max	
Output rise time	t <sub>r1</sub>	Measurement cct 3, load cct 1, 0.1V <sub>DD</sub> to 0.9V <sub>DD</sub>	C <sub>L</sub> = 15pF	–	1.7	3.4	ns
	t <sub>r2</sub>		C <sub>L</sub> = 30pF	–	3	6	
Output fall time	t <sub>f1</sub>	Measurement cct 3, load cct 1, 0.9V <sub>DD</sub> to 0.1V <sub>DD</sub>	C <sub>L</sub> = 15pF	–	1.7	3.4	ns
	t <sub>f2</sub>		C <sub>L</sub> = 30pF	–	3	6	
Output duty cycle* <sup>1</sup>	Duty1	Measurement cct 3, load cct 1, V <sub>DD</sub> = 5.0V, Ta = 25°C	C <sub>L</sub> = 30pF f = 60MHz	45	–	55	%
Output disable delay time* <sup>2</sup>	t <sub>PLZ</sub>	Measurement cct 6, load cct 1, V <sub>DD</sub> = 5.0V, Ta = 25°C, C <sub>L</sub> = 15pF		–	–	100	ns
Output enable delay time* <sup>2</sup>	t <sub>PZL</sub>			–	–	100	ns

\*1. The duty cycle characteristic is checked the sample chips of each production lot.

\*2. Oscillator stop function is built-in. When INHN goes LOW, normal output stops. When INHN goes HIGH, normal output is not resumed until after the oscillator start-up time has elapsed.

**Current consumption and Output waveform with NPC's standard crystal**

f [MHz]	R [ $\Omega$ ]	L [mH]	Ca [fF]	Cb [pF]
50	16.12	6.88	1.48	1.18
60*	–	–	–	–

\* The 60MHz crystal parameter is confidential.

**FUNCTIONAL DESCRIPTION****Standby Function**

When INHN goes LOW, the oscillator stops and the oscillator output on Q becomes high impedance.

INHN	Q	Oscillator
HIGH (or open)	Any $f_O$ , $f_O/2$ , $f_O/4$ , $f_O/8$ or $f_O/16$ output frequency	Normal operation
LOW	High impedance	Stopped

**Power-saving Pull-up Resistor**

The INHN pull-up resistance changes in response to the input level (HIGH or LOW). When INHN goes LOW (standby state), the pull-up resistance becomes large to reduce the current consumption during standby.







## Switching Time Measurement Waveform

### Output duty level

www.datasheet4u.com

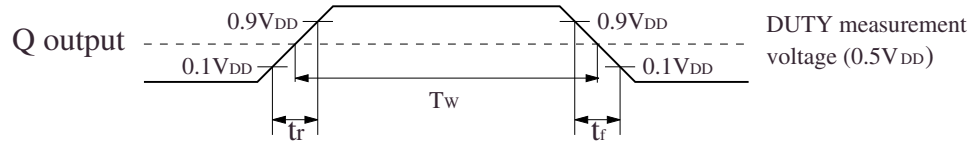


### Output duty cycle

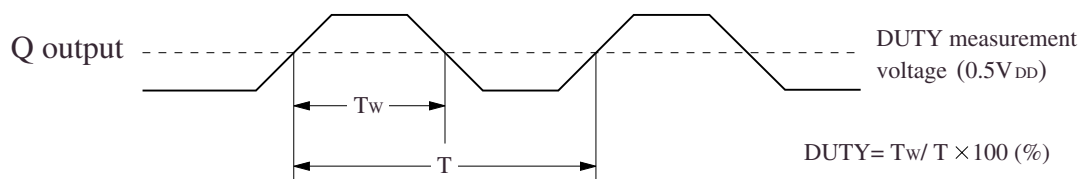

### Output Enable/Disable Delay

when the device is in standby, the oscillator stops. When standby is released, the oscillator starts and stable oscillator output occurs after a short delay.

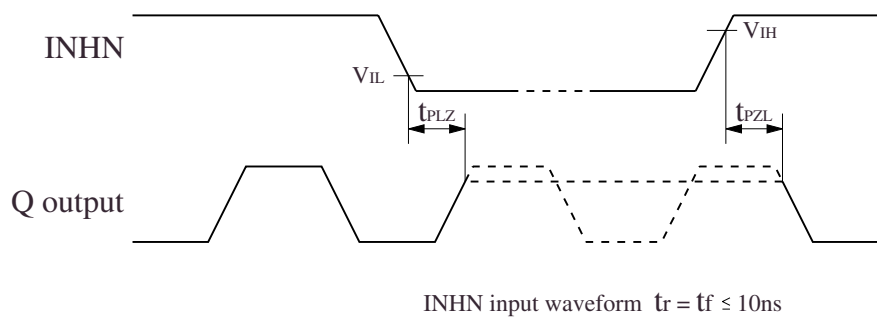

Please pay your attention to the following points at time of using the products shown in this document.

The products shown in this document (hereinafter "Products") are not intended to be used for the apparatus that exerts harmful influence on human lives due to the defects, failure or malfunction of the Products. Customers are requested to obtain prior written agreement for such use from SEIKO NPC CORPORATION (hereinafter "NPC"). Customers shall be solely responsible for, and indemnify and hold NPC free and harmless from, any and all claims, damages, losses, expenses or lawsuits, due to such use without such agreement. NPC reserves the right to change the specifications of the Products in order to improve the characteristic or reliability thereof. NPC makes no claim or warranty that the contents described in this document dose not infringe any intellectual property right or other similar right owned by third parties. Therefore, NPC shall not be responsible for such problems, even if the use is in accordance with the descriptions provided in this document. Any descriptions including applications, circuits, and the parameters of the Products in this document are for reference to use the Products, and shall not be guaranteed free from defect, inapplicability to the design for the mass-production products without further testing or modification. Customers are requested not to export or re-export, directly or indirectly, the Products to any country or any entity not in compliance with or in violation of the national export administration laws, treaties, orders and regulations. Customers are requested appropriately take steps to obtain required permissions or approvals from appropriate government agencies.

**SEIKO NPC CORPORATION**

15-6, Nihombashi-kabutocho, Chuo-ku,  
Tokyo 103-0026, Japan  
Telephone: +81-3-6667-6601  
Facsimile: +81-3-6667-6611  
<http://www.npc.co.jp/>  
Email: [sales@npc.co.jp](mailto:sales@npc.co.jp)

NC0206CE 2007.02