

## OVERVIEW

The CF5016 series are 1.8V operation crystal oscillator ICs. They are available for frequencies up to 50MHz. They employ a recently developed low-voltage process optimized for operation at 1.8V, resulting in stable operation at low voltages while maintaining the same output duty stability of existing devices. They are ideally suited for battery-operated electronic equipment applications where small size, low-voltage operation, and low power dissipation are essential.

## FEATURES

- 1.6 to 2.0V operating supply voltage range
- Up to 50MHz oscillation frequency range
- – 40 to 85°C operating temperature range
- Oscillation capacitors built-in
  - $C_G = 18\text{pF}$ ,  $C_D = 18\text{pF}$
- Inverter amplifier feedback resistor built-in
- Standby function
  - High impedance in standby mode, oscillator stops
- Low standby current
  - Power-saving pull-up resistor built-in
- $f_O$ ,  $f_O/2$ ,  $f_O/4$ ,  $f_O/8$ , or  $f_O/16$  output frequency, determined by internal connection
- CMOS output duty level (1/2VDD)
- Molybdenum-gate CMOS process
- Chip form (CF5016AL×)

## SERIES CONFIGURATION

Version	Recommended operating frequency range <sup>1</sup> [MHz]		Built-in capacitance [pF]		Output frequency	Standby function
	$C_L = 15\text{pF}$	$C_L = 30\text{pF}$	$C_G$	$C_D$		
CF5016AL1	4 to 50	4 to 30	18	18	$f_O$	Yes
CF5016AL2					$f_O/2$	Yes
CF5016AL3					$f_O/4$	Yes
CF5016AL4					$f_O/8$	Yes
CF5016AL5					$f_O/16$	Yes

1. The recommended operating frequency is a yardstick value derived from the crystal used for NPC characteristics authentication. However, the oscillator frequency band is not guaranteed. Specifically, the characteristics can vary greatly due to crystal characteristics and mounting conditions, so the oscillation characteristics of components must be carefully evaluated.


## ORDERING INFORMATION

Device	Package
CF5016AL×-2	Chip form

PAD LAYOUT

(Unit:  $\mu\text{m}$ )


www.datasheet4u.com

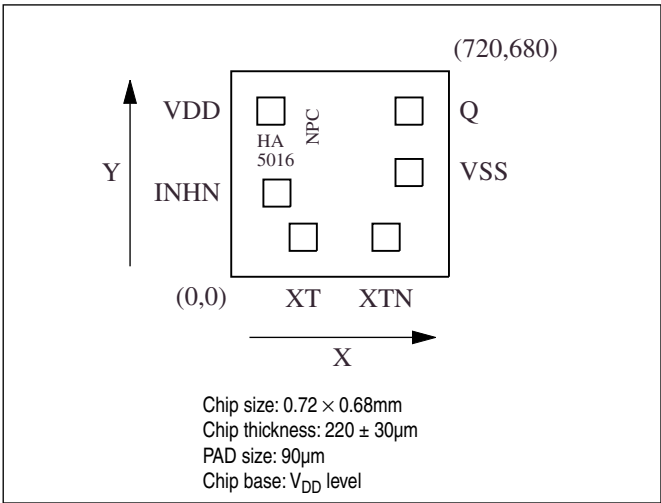

PIN DESCRIPTION and PAD DIMENSIONS

Name	I/O	Description	Pad dimensions [ $\mu\text{m}$ ]	
			X	Y
INHN	I	Output state control input. High impedance when LOW (oscillator stops). Power-saving pull-up resistor built-in.	151	277
XT	I	Amplifier input	238	131
XTN	O	Amplifier output	512	131
VSS	–	Ground	588	345
Q	O	Output. Output frequency ( $f_O$ , $f_O/2$ , $f_O/4$ , $f_O/8$ , $f_O/16$ ) determined by internal connection	588	548
VDD	–	Supply voltage	131	548

BLOCK DIAGRAM

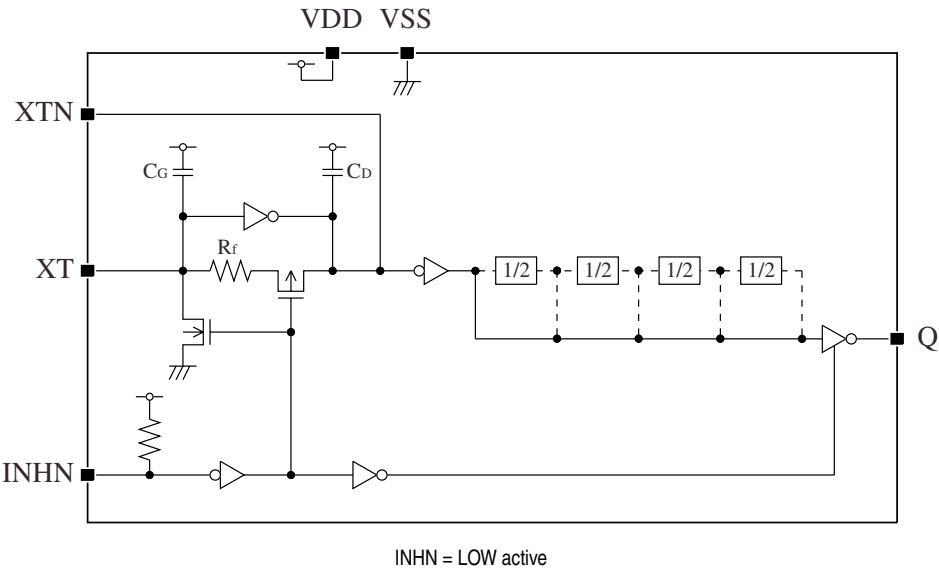

## SPECIFICATIONS

### Absolute Maximum Ratings

 $V_{SS} = 0V$ 
[www.datasheet4u.com](http://www.datasheet4u.com)

Parameter	Symbol	Condition	Rating	Unit
Supply voltage range	$V_{DD}$		-0.5 to +3.6	V
Input voltage range	$V_{IN}$		-0.5 to $V_{DD} + 0.5$	V
Output voltage range	$V_{OUT}$		-0.5 to $V_{DD} + 0.5$	V
Operating temperature range	$T_{opr}$		-40 to +85	°C
Storage temperature range	$T_{STG}$		-65 to +150	°C
Output current	$I_{OUT}$		12	mA

### Recommended Operating Conditions

 $V_{SS} = 0V$ 

Parameter	Symbol	Condition	Rating	Unit
Supply voltage range	$V_{DD}$		1.6 to 2.0	V
Input voltage range	$V_{IN}$		$V_{SS}$ to $V_{DD}$	V
Operating temperature range	$T_{OPR}$		-40 to +85	°C
Operating frequency range	$f_{OSC}$	$C_L \leq 15pF$	4 to 50 <sup>*1</sup>	MHz
		$C_L \leq 30pF$	4 to 30	MHz

\*1. When the operating frequency is over 45MHz, the duty variation tends to increase.

## Electrical Characteristics

$V_{DD} = 1.6$  to  $2.0V$ ,  $V_{SS} = 0V$ ,  $T_a = -40$  to  $+85^{\circ}C$  unless otherwise noted.

Parameter	Symbol	Condition		Rating			Unit
				min	typ	max	
HIGH-level output voltage	V <sub>OH</sub>	Q: Measurement cct 1, V <sub>DD</sub> = 1.6V, I <sub>OH</sub> = 2.8mA		1.1	1.4	–	V
LOW-level output voltage	V <sub>OL</sub>	Q: Measurement cct 1, V <sub>DD</sub> = 1.6V, I <sub>OL</sub> = 2.8mA		–	0.3	0.4	V
HIGH-level input voltage	V <sub>IH</sub>	INH N		0.7V <sub>DD</sub>	–	–	V
LOW-level input voltage	V <sub>IL</sub>	INH N		–	–	0.3V <sub>DD</sub>	V
Output leakage current	I <sub>Z</sub>	Q: Measurement cct 2, INHN = LOW	V <sub>OH</sub> = V <sub>DD</sub>	–	–	10	μA
			V <sub>OL</sub> = V <sub>SS</sub>	–	–	10	μA
Current consumption	I <sub>DD</sub>	Measurement cct 3, load cct 1, INHN = open, C <sub>L</sub> = 15pF, f = 50MHz	CF5016AL1	–	3.5	7	mA
			CF5016AL2	–	2.5	5	mA
			CF5016AL3	–	2	4	mA
			CF5016AL4	–	1.5	3	mA
			CF5016AL5	–	1	2	mA
Standby current	I <sub>ST</sub>	Measurement cct 3, INHN = LOW		–	–	10	μA
INH N pull-up resistance	R <sub>UP1</sub>	Measurement cct 4		2	6	12	MΩ
	R <sub>UP2</sub>			30	150	300	kΩ
Feedback resistance	R <sub>f</sub>	Measurement cct 5		100	300	600	kΩ
Built-in capacitance	C <sub>G</sub>	Design value. A monitor pattern on a wafer is tested.		15.3	18	20.7	pF
	C <sub>D</sub>			15.3	18	20.7	pF

## Switching Characteristics


$V_{DD} = 1.6$  to  $2.0V$ ,  $V_{SS} = 0V$ ,  $T_a = -40$  to  $+85^{\circ}C$  unless otherwise noted.

Parameter	Symbol	Condition		Rating			Unit
				min	typ	max	
Output rise time	t <sub>r1</sub>	Measurement cct 3, load cct 1, 0.2V <sub>DD</sub> to 0.8V <sub>DD</sub>	C <sub>L</sub> = 15pF	–	2.5	5.0	ns
	t <sub>r2</sub>		C <sub>L</sub> = 30pF	–	4.0	8.0	
Output fall time	t <sub>f1</sub>	Measurement cct 3, load cct 1, 0.8V <sub>DD</sub> to 0.2V <sub>DD</sub>	C <sub>L</sub> = 15pF	–	2.5	5.0	ns
	t <sub>f2</sub>		C <sub>L</sub> = 30pF	–	4.0	8.0	
Output duty cycle <sup>1</sup>	Duty1	Measurement cct 3, load cct 1, V <sub>DD</sub> = 1.8V, Ta = 25°C	C <sub>L</sub> = 15pF f = 45MHz	45	–	55	%
	Duty2		C <sub>L</sub> = 15pF f = 50MHz	40	–	60	%
	Duty3		C <sub>L</sub> = 30pF f = 30MHz	45	–	55	%
Output disable delay time <sup>2</sup>	t <sub>PLZ</sub>	Measurement cct 6, load cct 1, V <sub>DD</sub> = 1.8V, Ta = 25°C, C <sub>L</sub> = 15pF		–	–	200	ns
Output enable delay time <sup>2</sup>	t <sub>PZL</sub>			–	–	200	ns

1. The duty cycle characteristic is checked the sample chips of each production lot.

2. Oscillator stop function is built-in. When INHN goes LOW, normal output stops. When INHN goes HIGH, normal output is not resumed until after the oscillator start-up time has elapsed.

## Current consumption and Output waveform with NPC's standard crystal



f [MHz]	R [ $\Omega$ ]	L [mH]	Ca [fF]	Cb [pF]
30	5.26	2.82	9.99	2.68
40	8.24	5.72	2.77	2.22
50	16.12	6.88	1.43	1.18

## FUNCTIONAL DESCRIPTION

### Standby Function

When INHN goes LOW, the oscillator stops and the oscillator output on Q becomes high impedance.

INHN	Q	Oscillator
HIGH (or open)	Any $f_O$ , $f_O/2$ , $f_O/4$ , $f_O/8$ or $f_O/16$ output frequency	Normal operation
LOW	High impedance	Stopped


### Power-saving Pull-up Resistor

The INHN pull-up resistance changes in response to the input level (HIGH or LOW). When INHN goes LOW (standby state), the pull-up resistance becomes large to reduce the current consumption during standby.

## MEASUREMENT CIRCUITS


### Measurement cct 1

www.datasheet4u.com

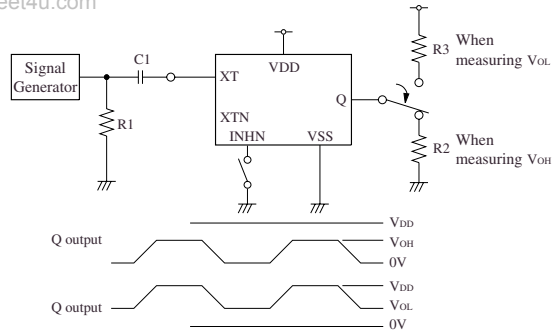


1Vp-p, 10MHz sine wave input signal  
 $C1: 0.001\mu F$   
 $R1: 50\Omega$   
 $R2: 393\Omega$   
 $R3: 429\Omega$


### Measurement cct 4

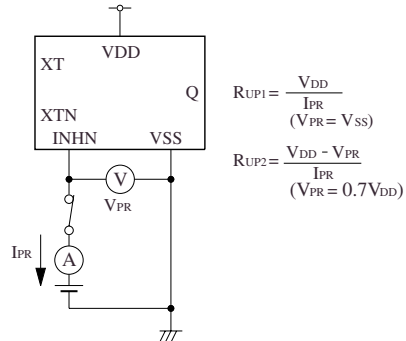


### Measurement cct 5

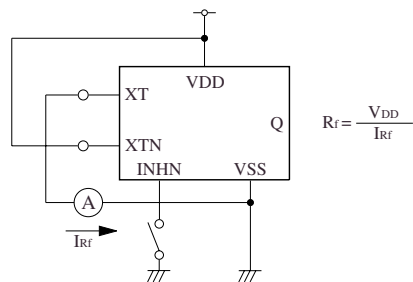

### Measurement cct 2

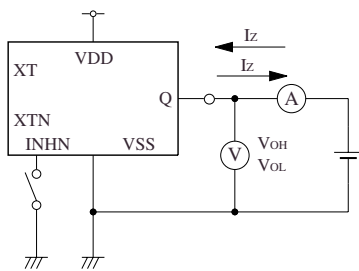


### Measurement cct 6

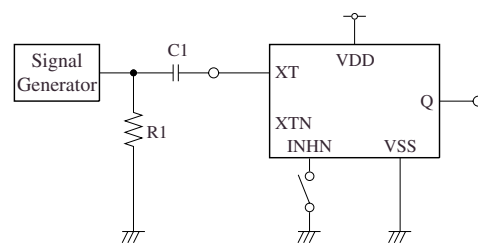


1Vp-p, 10MHz sine wave input signal  
 $C1: 0.001\mu F$   
 $R1: 50\Omega$

### Measurement cct 3




### Load cct 1

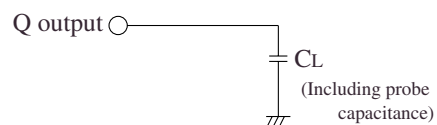


## Switching Time Measurement Waveform

### Output duty level

www.datasheet4u.com

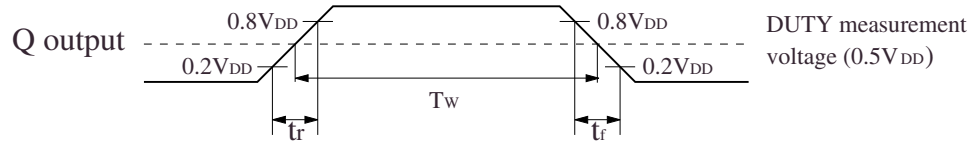


### Output duty cycle

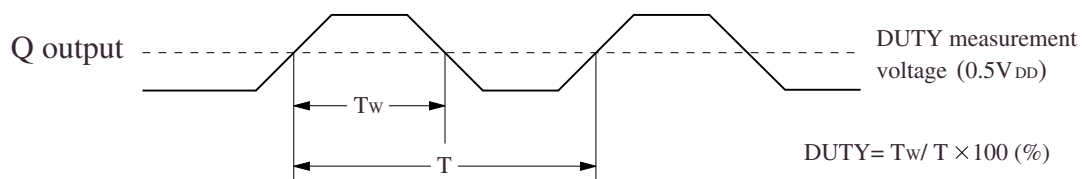

### Output Enable/Disable Delay

when the device is in standby, the oscillator stops. When standby is released, the oscillator starts and stable oscillator output occurs after a short delay.

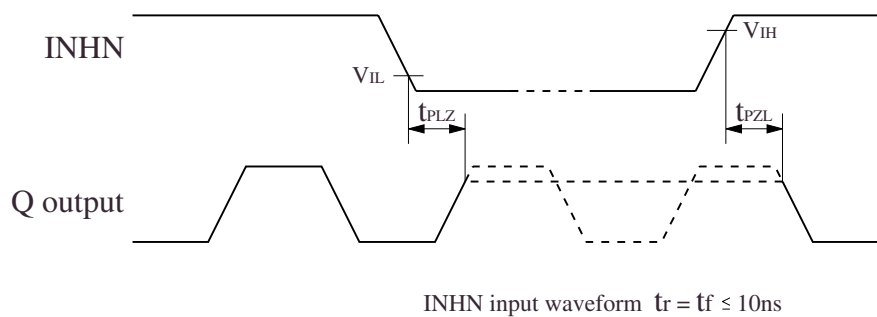

Please pay your attention to the following points at time of using the products shown in this document.

The products shown in this document (hereinafter "Products") are not intended to be used for the apparatus that exerts harmful influence on human lives due to the defects, failure or malfunction of the Products. Customers are requested to obtain prior written agreement for such use from SEIKO NPC CORPORATION (hereinafter "NPC"). Customers shall be solely responsible for, and indemnify and hold NPC free and harmless from, any and all claims, damages, losses, expenses or lawsuits, due to such use without such agreement. NPC reserves the right to change the specifications of the Products in order to improve the characteristic or reliability thereof. NPC makes no claim or warranty that the contents described in this document dose not infringe any intellectual property right or other similar right owned by third parties. Therefore, NPC shall not be responsible for such problems, even if the use is in accordance with the descriptions provided in this document. Any descriptions including applications, circuits, and the parameters of the Products in this document are for reference to use the Products, and shall not be guaranteed free from defect, inapplicability to the design for the mass-production products without further testing or modification. Customers are requested not to export or re-export, directly or indirectly, the Products to any country or any entity not in compliance with or in violation of the national export administration laws, treaties, orders and regulations. Customers are requested appropriately take steps to obtain required permissions or approvals from appropriate government agencies.

The logo for NPC (Nihombashi Kabutocho) is displayed in a large, bold, black sans-serif font.**SEIKO NPC CORPORATION**

15-6, Nihombashi-kabutocho, Chuo-ku,  
Tokyo 103-0026, Japan  
Telephone: +81-3-6667-6601  
Facsimile: +81-3-6667-6611  
<http://www.npc.co.jp/>  
Email: [sales@npc.co.jp](mailto:sales@npc.co.jp)

NC0207BE 2006.04