

ISSUE 3; August 2016

### Description

- 32.768kHz output crystal oscillator in a ceramic package, hermetically sealed with a seam sealed metal lid
- Suitable for real time clock applications

### Frequency Parameters

- Frequency 32.768kHz
- Frequency Stability  $\pm 20.00\text{ppm}$  to  $\pm 50.00\text{ppm}$
- Ageing  $\pm 3\text{ppm}$  max per year

### Electrical Parameters

- Supply Voltage 2.5V  $\pm 5\%$

### Operating Temperature Ranges

- 20 to 70°C
- 10 to 70°C
- 40 to 85°C

### Output Details

- Output Compatibility CMOS
- Drive Capability 15pF max

### Output Control

- Logic '1' (>70% VS) to pad 1 enables oscillator output
- Logic '0' (<30% VS) to pad 1 disables oscillator output; when disabled the oscillator output goes to the high impedance state
- No connection to pad 1 enables oscillator output

### Environmental Parameters

- Storage Temperature Range: -55 to 125°C
- Shock: MIL-STD-883F, Method 2002.4: 1500G, 0.5ms, 3 times in each of 3 mutually perpendicular planes
- Vibration: MIL-STD-883F, Method 2007.3: 20G (20Hz-2000Hz), 1.52mm amplitude, 20mins in 3 mutually perpendicular planes (total 4hrs)

### Ordering Information


- Frequency\*
- Model\*
- Output
- Frequency Stability\*
- Operating Temperature Range\*
- Supply Voltage (\*minimum required)
- Example
- 32.768kHz CFPS-103
- CMOS  $\pm 50\text{ppm}$  -10 to 70C 2.5V

### Compliance


- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable



### Outline (mm)

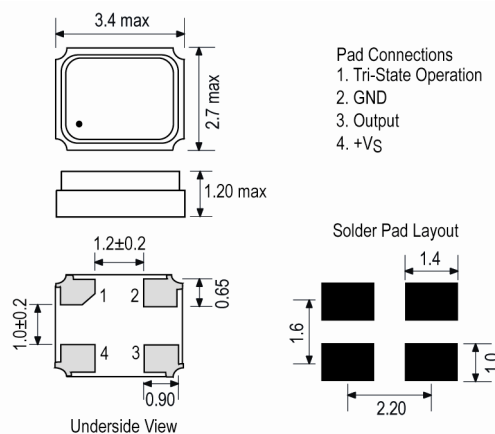

### Test Circuit

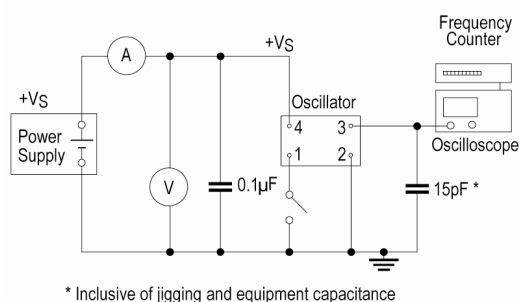

### Sales Office Contact Details:

UK: +44 (0)1460 270200  
Germany: 0800 1808 443


France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

### Packaging Details

- Pack Style: Cutt      In tape, cut from a reel  
Pack Size: 1
- Pack Style: Reel      Tape & reel in accordance with EIA-481-D  
Pack Size: 1,000

### Wave Form

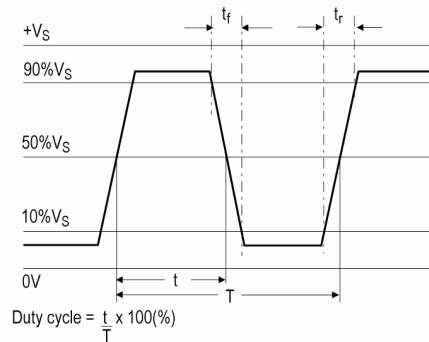

### Electrical Specification - maximum limiting values 2.50V ±5%

| Frequency<br>Min | Temperature Range | Stability<br>(Min) | Current<br>Draw | Rise and Fall<br>Time | Duty Cycle |
|------------------|-------------------|--------------------|-----------------|-----------------------|------------|
|                  | °C                | ppm                | mA              | ns                    | %          |
| 32.768000kHz     | -40 to 85         | ±25.00             | 2.5             | 50                    | 40/60%     |
|                  | -20 to 70         | ±20.00             | 2.5             | 50                    | 40/60%     |
|                  | -10 to 70         | ±20.00             | 2.5             | 50                    | 40/60%     |

*This document was correct at the time of printing; please contact your local sales office for the latest version.*

[Click to view latest version on our website.](#)

### Sales Office Contact Details:

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)