

CGJ6P3X7S1H685K250AB

TDK Item Description : CGJ6P3X7S1H685KT***




Application & Main Feature

High Reliability Grade (General (Up to 50V))

Series

CGJ6(3225) [EIA CC1210]



Dimensions

L 3.20mm +/-0.4mm
W 2.50mm +/-0.3mm
T 2.50mm +/-0.3mm
B 0.20mm Min.
G

Temperature Characteristic

X7S (-55 to 125 degC +/-22%)

Rated Voltage

1H (50Vdc)

Capacitance

6.8uF

Capacitance Tolerance

K (+/-10%)

Dissipation Factor

5% Max.


Insulation Resistance

73Mohm Min.


AEC-Q200

Yes


DC Bias Characteristic

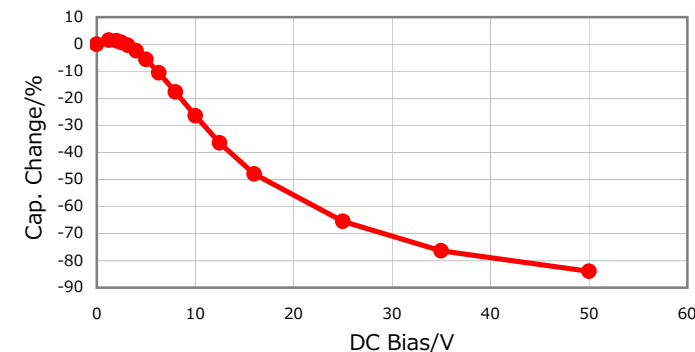


|Z|, ESR vs. Freq. Characteristics

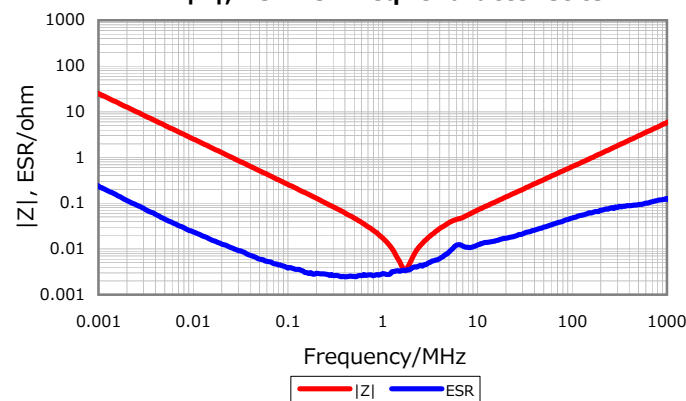


Temperature Characteristics

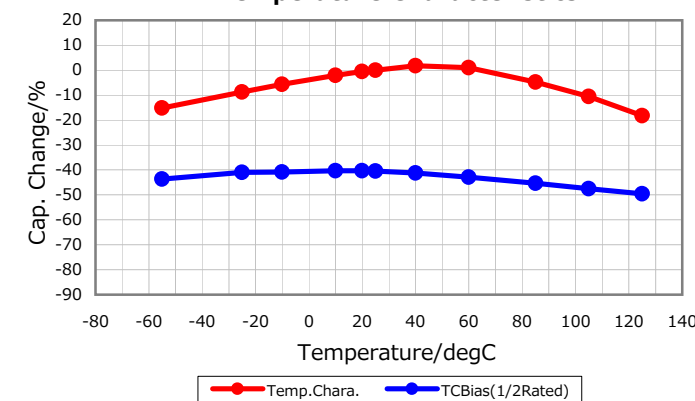

Cap. vs. Freq. Characteristic

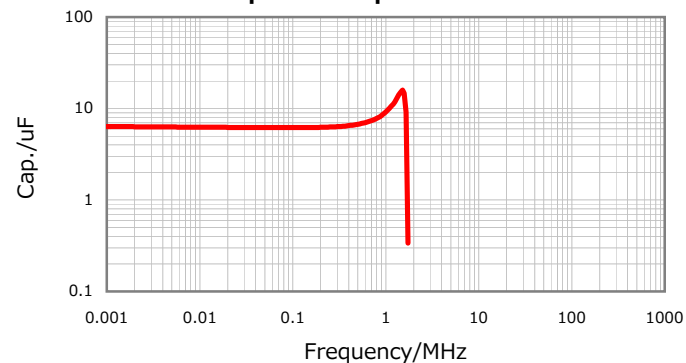

Ripple Temperature Rise Characteristics

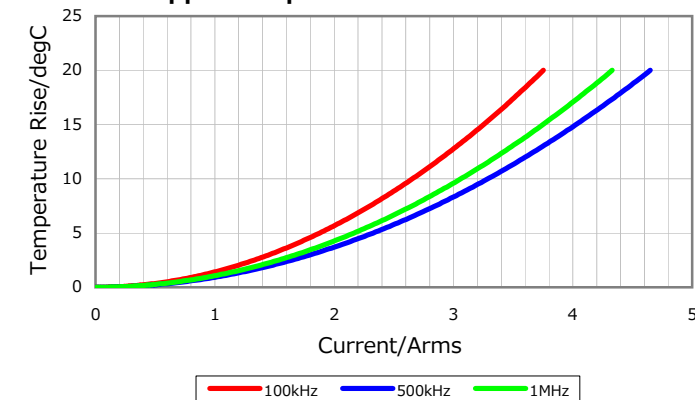

All specifications are subject to change without notice.

January 4, 2016