

# SMD General Purpose Rectifier

**COMCHIP**  
www.comchip.com.tw

## CGRB201 Thru CGRB207

Glass Passivated Type

Reverse Voltage: 50 - 1000 Volts

Forward Current: 2.0 Amp



### Features

Ideal for surface mount applications

Easy pick and place

Plastic package has Underwriters Lab.  
flammability classification 94V-0

Built-in strain relief

High surge current capability

### Mechanical data


Case: JEDEC DO-214AA molded plastic

Terminals: solderable per MIL-STD-750,  
method 2026

Polarity: Color band denotes cathode end

Mounting position: Any

Approx. Weight: 0.093 gram

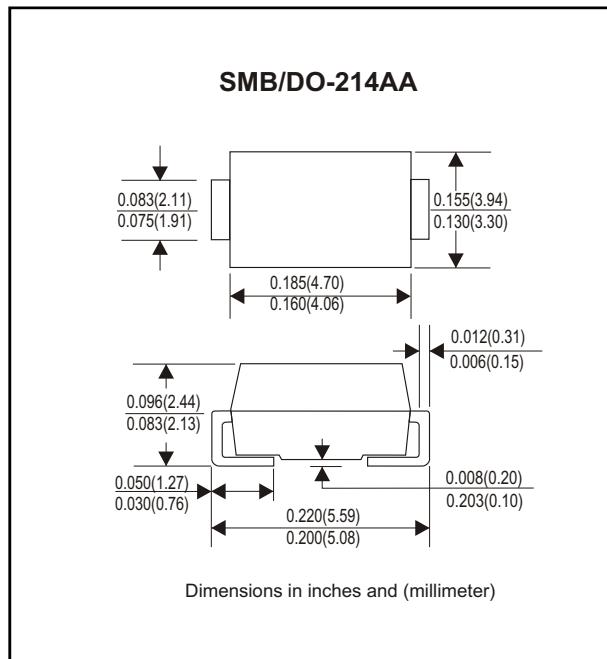

### Maximum Ratings and Electrical Characteristics

Parameter	Symbol	CGRB 201	CGRB 202	CGRB 203	CGRB 204	CGRB 205	CGRB 206	CGRB 207	Unit
Max. Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Max. DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Max. RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Peak Surge Forward Current 8.3ms single halfsine-wave superimposed on rateload ( JEDEC method )	I <sub>FSM</sub>				60				A
Max. Average Forward Current	I <sub>o</sub>				2.0				A
Max. Instantaneous Forward Current at 2.0 A	V <sub>F</sub>				1.1				V
Max. DC Reverse Current at Rated DC Blocking Voltage      Ta=25°C Ta=100°C	I <sub>R</sub>				5 50				μA
Max. Thermal Resistance (Note 1)	R <sub>θJL</sub>				16				°C/W
Operating Junction Temperature	T <sub>j</sub>				-55 to +150				°C
Storage Temperature	T <sub>STG</sub>				-55 to +150				°C

Note 1: Thermal resistance from junction to lead 8.0x8.0mm square (0.13mm thick) land areas.

## Rating and Characteristic Curves (CGRB201 Thru CGRB207)

Fig. 1 - Reverse Characteristics

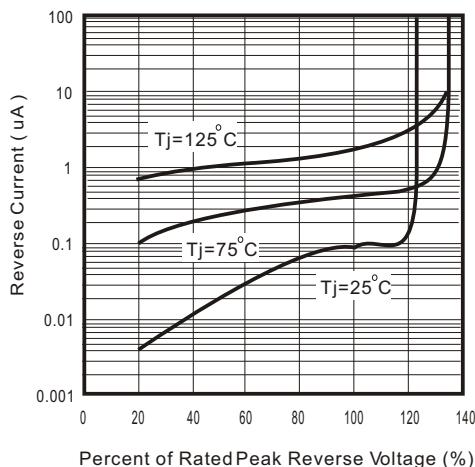


Fig.2 - Forward Characteristics

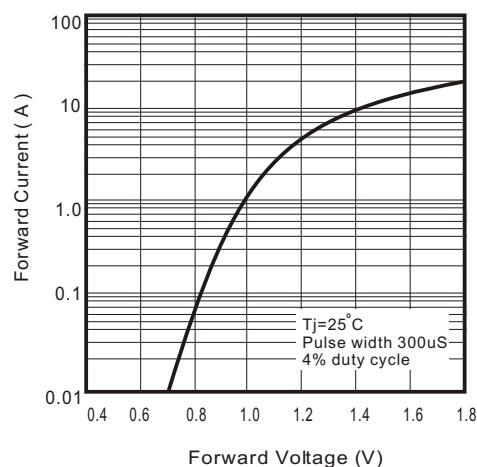


Fig. 3 - Junction Capacitance

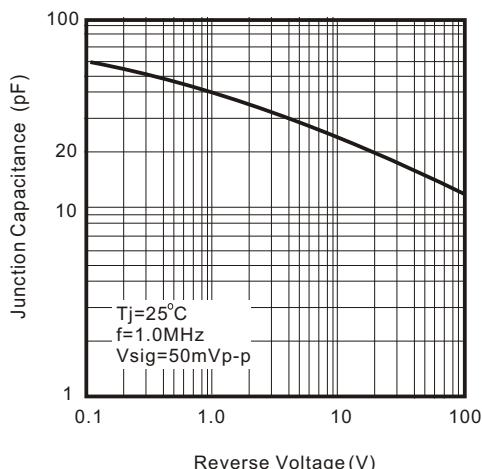


Fig. 4 - Current Derating Curve

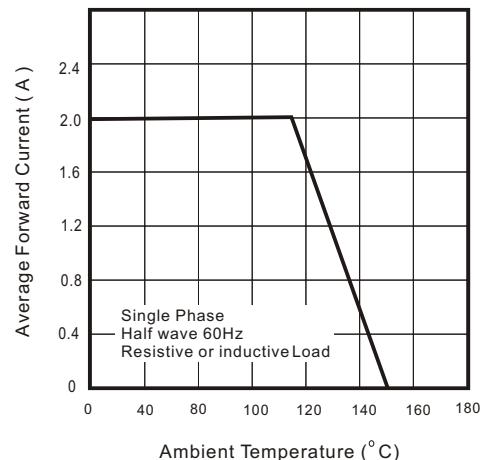


Fig. 5 - Non Repetitive Forward Surge Current

