



CHENMKO ENTERPRISE CO.,LTD

SURFACE MOUNT

Dual Enhancement Mode Field Effect Transistor

N-channel: VOLTAGE 20 Volts CURRENT 8.3 Ampere

P-channel: VOLTAGE 20 Volts CURRENT 5 Ampere

CHM4501JPT

Lead free devices

APPLICATION

- * Servo motor control.
- * Power MOSFET gate drivers.
- * Other switching applications.

FEATURE

- * Small flat package. (SO-8)
- * Super high dense cell design for extremely low $R_{DS(ON)}$.
- * Lead free product is acquired.
- * High power and current handling capability.



CONSTRUCTION

- * N-Channel & P-Channel Enhancement in the package



SO-8

CIRCUIT

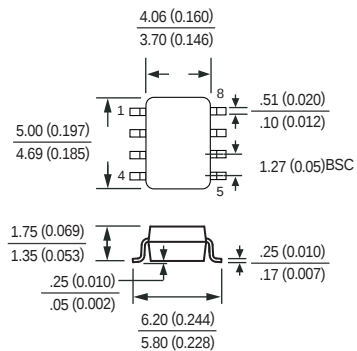

SO-8

Absolute Maximum Ratings $T_A = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	N-Channel	P-Channel	Units
V_{DS}	Drain-Source Voltage	20	-20	V
V_{GS}	Gate-Source Voltage	± 12	± 12	V
I_D	Maximum Drain Current - Continuous	8.3	-5	A
	- Pulsed (Note 3)	30	-20	
P_D	Maximum Power Dissipation	2000		mW
T_J	Operating Temperature Range	-55 to 150		$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to 150		$^\circ\text{C}$

- Note : 1. Surface Mounted on FR4 Board , $t \leq 10\text{sec}$
 2. Pulse Test , Pulse width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$
 3. Repetitive Rating , Pulse width limited by maximum junction temperature
 4. Guaranteed by design , not subject to production trsting

Thermal characteristics

$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient (Note 1)	62.5	$^\circ\text{C/W}$
-----------------	--	------	--------------------

2006-02

RATING CHARACTERISTIC CURVES (CHM4501JPT)

N-Channel Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
--------	-----------	------------	-----	-----	-----	-------

OFF CHARACTERISTICS

BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}, I_D = 250\text{ }\mu\text{A}$	20			V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 20\text{ V}, V_{GS} = 0\text{ V}$			1	μA
I_{GSSF}	Gate-Body Leakage	$V_{GS} = 12\text{ V}, V_{DS} = 0\text{ V}$			+100	nA
I_{GSSR}	Gate-Body Leakage	$V_{GS} = -12\text{ V}, V_{DS} = 0\text{ V}$			-100	nA

ON CHARACTERISTICS (Note 2)

$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\text{ }\mu\text{A}$	0.5		1.5	V
$R_{DS(on)}$	Static Drain-Source On-Resistance	$V_{GS}=4.5\text{ V}, I_D=8.3\text{ A}$		14	18	$\text{m}\Omega$
		$V_{GS}=2.5\text{ V}, I_D=5.2\text{ A}$		22	30	
g_{FS}	Forward Transconductance	$V_{DS}=10\text{ V}, I_D = 8.3\text{ A}$		19		S

SWITCHING CHARACTERISTICS (Note 4)

Q_g	Total Gate Charge	$V_{DS}=10\text{ V}, I_D=8.3\text{ A}$ $V_{GS}=4.5\text{ V}$		18	26	nC
Q_{gs}	Gate-Source Charge			3.8		
Q_{gd}	Gate-Drain Charge			4.8		
t_{on}	Turn-On Time	$V_{DD}=15\text{ V}$ $I_D = 1.5\text{ A}, V_{GS} = 4.5\text{ V}$ $R_{GEN}=10\text{ }\Omega$		22	45	nS
t_r	Rise Time			16	40	
t_{off}	Turn-Off Time			34	70	
t_f	Fall Time			75	135	

DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS

I_S	Drain-Source Diode Forward Current	(Note 1)			1.8	A
V_{SD}	Drain-Source Diode Forward Voltage	$I_S = 1.8\text{ A}, V_{GS} = 0\text{ V}$ (Note 2)			1.3	V

RATING CHARACTERISTIC CURVES (CHM4501JPT)

P-Channel Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
--------	-----------	------------	-----	-----	-----	-------

OFF CHARACTERISTICS

BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}, I_D = -250\text{ }\mu\text{A}$	-20			V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = -20\text{ V}, V_{GS} = 0\text{ V}$			-1	μA
I_{GSSF}	Gate-Body Leakage	$V_{GS} = 12\text{ V}, V_{DS} = 0\text{ V}$			+100	nA
I_{GSSR}	Gate-Body Leakage	$V_{GS} = -12\text{ V}, V_{DS} = 0\text{ V}$			-100	nA

ON CHARACTERISTICS (Note 2)

$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = -250\text{ }\mu\text{A}$	-0.5		-1.5	V
$R_{DS(on)}$	Static Drain-Source On-Resistance	$V_{GS} = -4.5\text{ V}, I_D = -5\text{ A}$		35	42	$\text{m}\Omega$
		$V_{GS} = -2.5\text{ V}, I_D = -4\text{ A}$		68	86	
g_{FS}	Forward Transconductance	$V_{DS} = -10\text{ V}, I_D = -5\text{ A}$		11		S

SWITCHING CHARACTERISTICS (Note 4)

Q_g	Total Gate Charge	$V_{DS} = -15\text{ V}, I_D = -5\text{ A}$ $V_{GS} = -4.5\text{ V}$		20	26	nC
Q_{gs}	Gate-Source Charge			3.4		
Q_{gd}	Gate-Drain Charge			6.3		
t_{on}	Turn-On Time	$V_{DD} = -10\text{ V}$ $I_D = -1.0\text{ A}, V_{GS} = -4.5\text{ V}$ $R_{GEN} = 6\text{ }\Omega$		23	50	nS
t_r	Rise Time			14	40	
t_{off}	Turn-Off Time			99	150	
t_f	Fall Time			42	75	

DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS

I_S	Drain-Source Diode Forward Current	(Note 1)			-1.8	A
V_{SD}	Drain-Source Diode Forward Voltage	$I_S = -1.8\text{ A}, V_{GS} = 0\text{ V}$ (Note 2)			-1.3	V