

SOT-323 Plastic-Encapsulate MOSFETS

CJ2102 N-Channel 20-V(D-S) MOSFET


FEATURE

- TrenchFET Power MOSFET

APPLICATIONS

- Load Switch for Portable Devices
- DC/DC Converter

MARKING: TS2

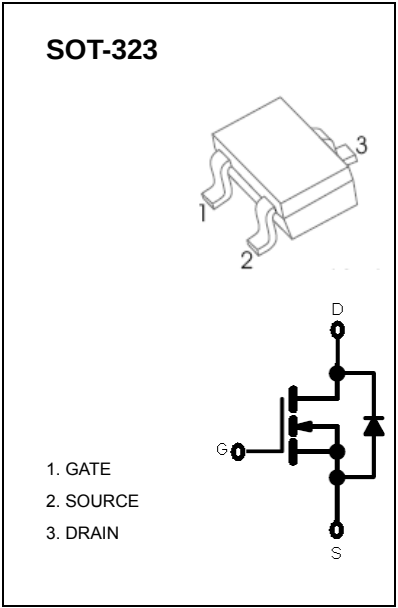

Maximum ratings (T_a=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V _{DS}	20	V
Gate-Source Voltage	V _{GS}	±8	
Continuous Drain Current	I _D	2.1	A
Continuous Source-Drain Current(Diode Conduction)	I _S	0.6	
Power Dissipation	P _D	0.2	W
Thermal Resistance from Junction to Ambient (t≤5s)	R _{θJA}	625	°C/W
Operating Junction	T _J	150	°C
Storage Temperature	T _{STG}	-55 ~+150	

Electrical characteristics (T_a=25°C unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static Characteristics						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D =10μA	20			V
Gate-threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =50μA	0.65	0.95	1.2	
Gate-body leakage	I _{GSS}	V _{DS} =0V, V _{GS} =±8V			±100	nA
Zero gate voltage drain current	I _{DSS}	V _{DS} =20V, V _{GS} =0V			1	μA
Drain-source on-resistance ¹	R _{DS(on)}	V _{GS} =4.5V, I _D =3.6A		0.045	0.060	Ω
		V _{GS} =2.5V, I _D =3.1A		0.070	0.115	
Forward transconductance ¹	g _{fs}	V _{DS} =5V, I _D =3.6A		8		S
Diode forward voltage	V _{SD}	I _S =0.94A,V _{GS} =0V		0.76	1.2	V
Dynamic Characteristics						
Total gate charge	Q _g	V _{DS} =10V,V _{GS} =4.5V,I _D =3.6A		4.0	10	nC
Gate-source charge	Q _{gs}			0.65		
Gate-drain charge	Q _{gd}			1.5		
Input capacitance ²	C _{iss}	V _{DS} =10V,V _{GS} =0V,f=1MHz		300		pF
Output capacitance ²	C _{oss}			120		
Reverse transfer capacitance ²	C _{rss}			80		
Switching Characteristics ²						
Turn-on delay time	t _{d(on)}	V _{DD} =10V, R _L =5.5Ω, I _D ≈3.6A, V _{GEN} =4.5V,R _g =6Ω		7	15	ns
Rise time	t _r			55	80	
Turn-off delay time	t _{d(off)}			16	60	
Fall time	t _f			10	25	

Notes :

1. Pulse Test : Pulse width ≤ 300μs, duty cycle ≤ 2%.
2. These parameters have no way to verify.