




## PDFNWB5×6-8L Plastic-Encapsulate MOSFETS

### CJAC35N03 N-Channel Power MOSFET

| $V_{(BR)DSS}$ | $R_{DS(on)MAX}$ | $I_D$ |
|---------------|-----------------|-------|
| 30V           | 7mΩ@10V         | 35A   |
|               | 12mΩ@4.5V       |       |

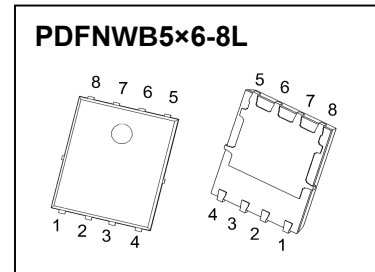

#### DESCRIPTION

The CJAC35N03 uses advanced trench technology and design to provide excellent  $R_{DS(ON)}$  with low gate charge. It can be used in a wide variety of applications

#### FEATURES

- High density cell design for ultra low  $R_{DS(ON)}$
- Fully characterized avalanche voltage and current
- Good stability and uniformity with high  $E_{AS}$
- Excellent package for good heat dissipation
- Special process technology for high ESD capability

#### APPLICATIONS


- High side switch in POL DC/DC converter
- Secondary side synchronous rectifier

#### MARKING



CJAC35N03 = Part No.  
Solid dot=Pin1 indicator  
XXX=Date Code

#### EQUIVALENT CIRCUIT



#### MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ unless otherwise noted )

| Parameter                                                       | Symbol                | Limit      | Unit               |
|-----------------------------------------------------------------|-----------------------|------------|--------------------|
| Drain-Source Voltage                                            | $V_{DS}$              | 30         | V                  |
| Gate-Source Voltage                                             | $V_{GS}$              | $\pm 20$   | V                  |
| Continuous Drain Current                                        | $I_D^{(1)}$           | 35         | A                  |
| Pulsed Drain Current                                            | $I_{DM}$              | 120        | A                  |
| Single Pulsed Avalanche Energy                                  | $E_{AS}^{(2)}$        | 150        | mJ                 |
| Power Dissipation                                               | $P_D$                 | 2          | W                  |
| Thermal Resistance from Junction to Ambient                     | $R_{\theta JA}^{(1)}$ | 62.5       | $^\circ\text{C/W}$ |
| Junction Temperature                                            | $T_J$                 | 150        | $^\circ\text{C}$   |
| Storage Temperature Range                                       | $T_{stg}$             | -55 ~ +150 | $^\circ\text{C}$   |
| Lead Temperature for Soldering Purposes(1/8" from case for 10s) | $T_L$                 | 260        | $^\circ\text{C}$   |

(1).Mounted on a glass epoxy board of 25.4 mm x 25.4 mm x 0.8 mm

(2). $E_{AS}$  condition:  $V_{DD}=15\text{V}$ ,  $L=0.1\text{mH}$ ,  $R_G=25\Omega$ , Starting  $T_J = 25^\circ\text{C}$

## MOSFET ELECTRICAL CHARACTERISTICS







$T_a=25^{\circ}\text{C}$  unless otherwise specified

| Parameter                                            | Symbol                | Test Condition                                                                       | Min | Typ  | Max  | Unit |
|------------------------------------------------------|-----------------------|--------------------------------------------------------------------------------------|-----|------|------|------|
| Off characteristics                                  |                       |                                                                                      |     |      |      |      |
| Drain-source breakdown voltage                       | V <sub>(BR) DSS</sub> | V <sub>GS</sub> = 0V, I <sub>D</sub> =250μA                                          | 30  |      |      | V    |
| Zero gate voltage drain current                      | I <sub>DSS</sub>      | V <sub>DS</sub> =30V, V <sub>GS</sub> =0V                                            |     |      | 1    | μA   |
| Gate-body leakage current                            | I <sub>GSS</sub>      | V <sub>DS</sub> =0V, V <sub>GS</sub> =±20V                                           |     |      | ±100 | nA   |
| On characteristics (note1)                           |                       |                                                                                      |     |      |      |      |
| Gate-threshold voltage                               | V <sub>GS(th)</sub>   | V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250μA                             | 1.0 | 1.6  | 3.0  | V    |
| Static drain-source on-sate resistance               | R <sub>DS(on)</sub>   | V <sub>GS</sub> =4.5V, I <sub>D</sub> =10A                                           |     | 8.2  | 12   | mΩ   |
|                                                      |                       | V <sub>GS</sub> =10V, I <sub>D</sub> =12A                                            |     | 5.0  | 7.0  | mΩ   |
| Forward transconductance                             | g <sub>FS</sub>       | V <sub>DS</sub> =10V, I <sub>D</sub> =12A                                            | 30  |      |      | S    |
| Dynamic characteristics (note 2)                     |                       |                                                                                      |     |      |      |      |
| Input capacitance                                    | C <sub>iss</sub>      | V <sub>DS</sub> =15V,V <sub>GS</sub> =0V,<br>f =1MHz                                 |     | 1265 |      | pF   |
| Output capacitance                                   | C <sub>oss</sub>      |                                                                                      |     | 600  |      |      |
| Reverse transfer capacitance                         | C <sub>rss</sub>      |                                                                                      |     | 130  |      |      |
| Switching characteristics (note 2)                   |                       |                                                                                      |     |      |      |      |
| Total gate charge                                    | Q <sub>g</sub>        | V <sub>DS</sub> =15V, V <sub>GS</sub> =10V,<br>I <sub>D</sub> =12A                   |     | 19   |      | nC   |
| Gate-source charge                                   | Q <sub>gs</sub>       |                                                                                      |     | 2.7  |      |      |
| Gate-drain charge                                    | Q <sub>gd</sub>       |                                                                                      |     | 2.5  |      |      |
| Turn-on delay time                                   | t <sub>d(on)</sub>    | V <sub>DD</sub> =15V,I <sub>D</sub> =12A,<br>V <sub>GS</sub> =10V,R <sub>G</sub> =6Ω |     | 18   |      | ns   |
| Turn-on rise time                                    | t <sub>r</sub>        |                                                                                      |     | 10   |      |      |
| Turn-off delay time                                  | t <sub>d(off)</sub>   |                                                                                      |     | 34   |      |      |
| Turn-off fall time                                   | t <sub>f</sub>        |                                                                                      |     | 10   |      |      |
| Drain-Source Diode Characteristics                   |                       |                                                                                      |     |      |      |      |
| Drain-source diode forward voltage(note1)            | V <sub>SD</sub>       | V <sub>GS</sub> =0V, I <sub>S</sub> =12A                                             |     | 0.85 | 1.2  | V    |
| Continuous drain-source diode forward current(note3) | I <sub>S</sub>        |                                                                                      |     |      | 35   | A    |
| Pulsed drain-source diode forward current            | I <sub>SM</sub>       |                                                                                      |     |      | 120  | A    |


Notes:

1. Pulse Test : Pulse Width  $\leq 300\mu s$ , duty cycle  $\leq 2\%$ .
2. Guaranteed by design, not subject to production.
3. Surface Mounted on FR4 Board,  $t \leq 10$  sec.


# Typical Characteristics

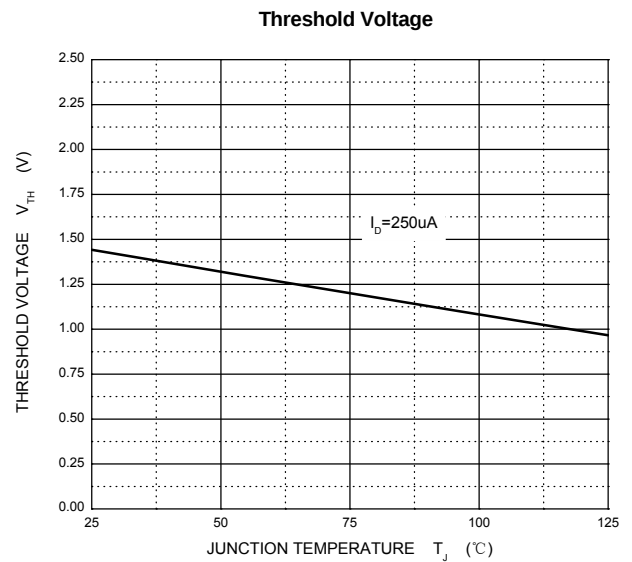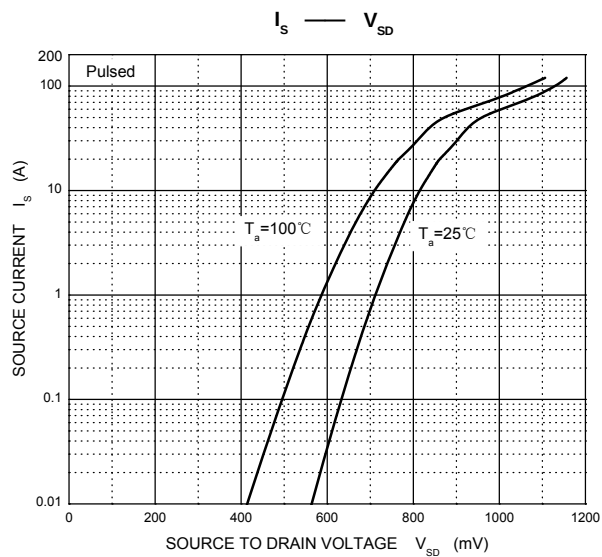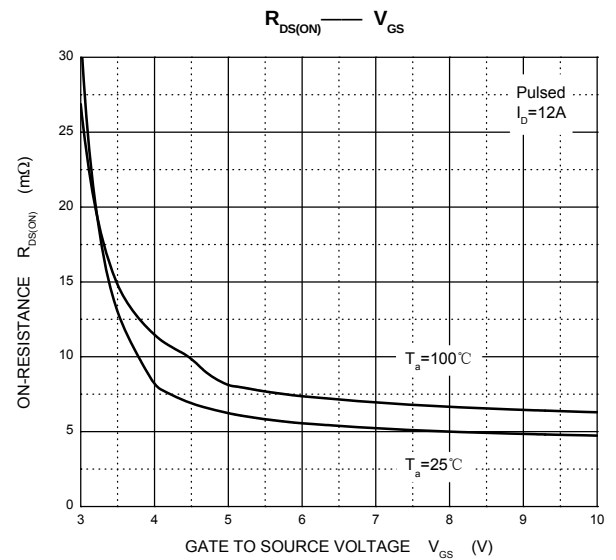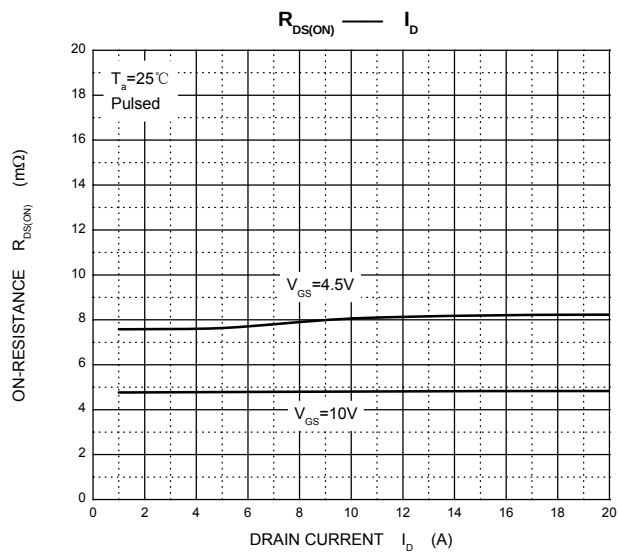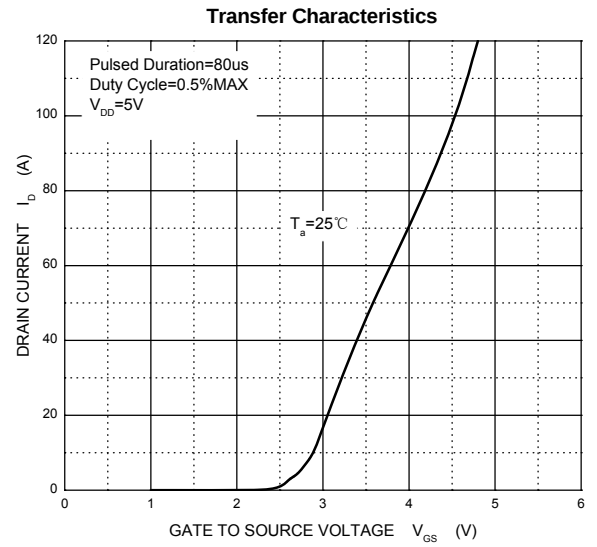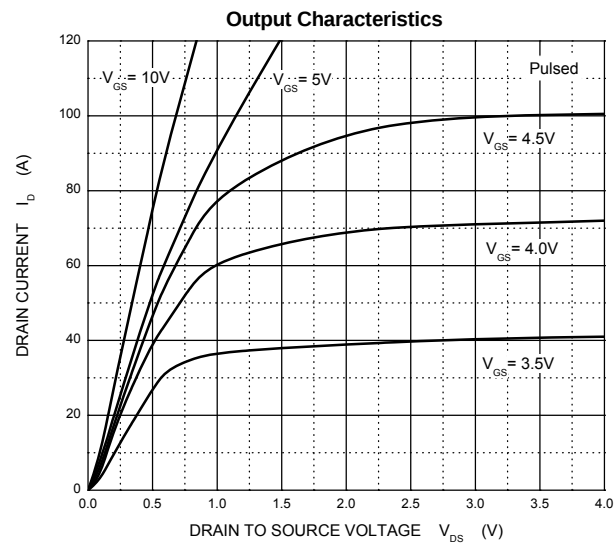

PDFNWB5x6-8L Package Outline Dimensions

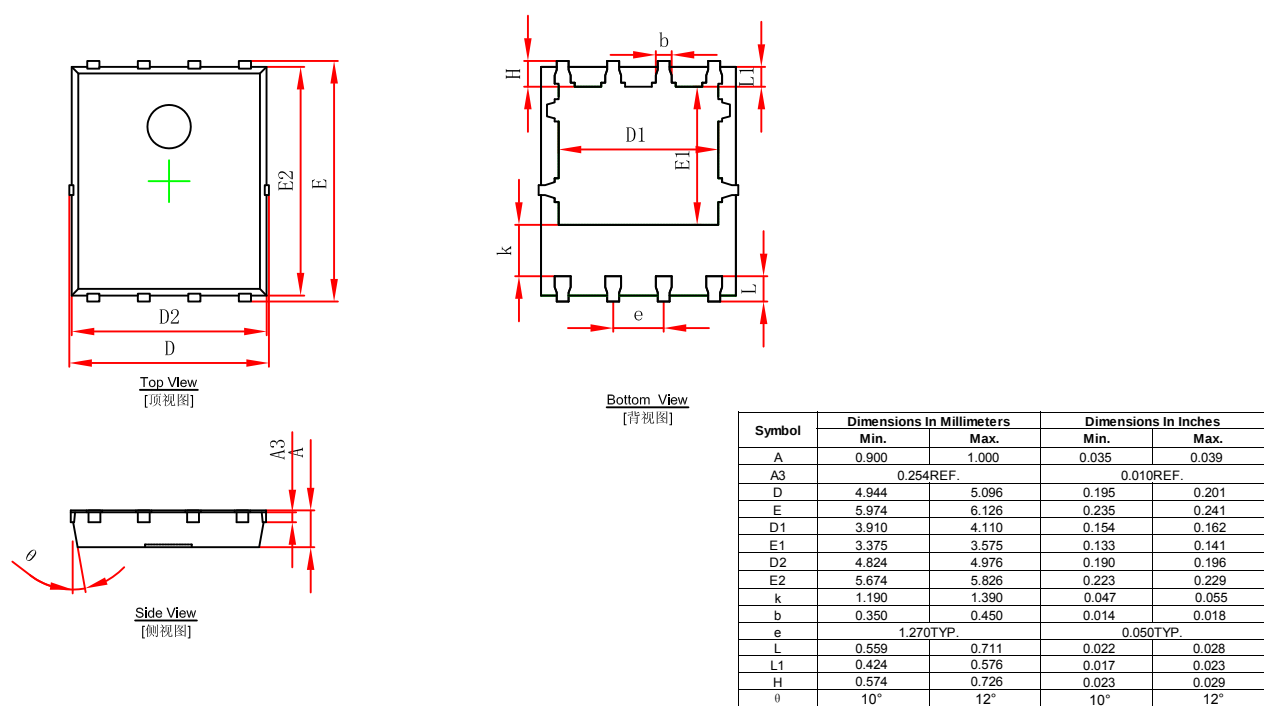

PDFNWB5x6-8L Suggested Pad Layout

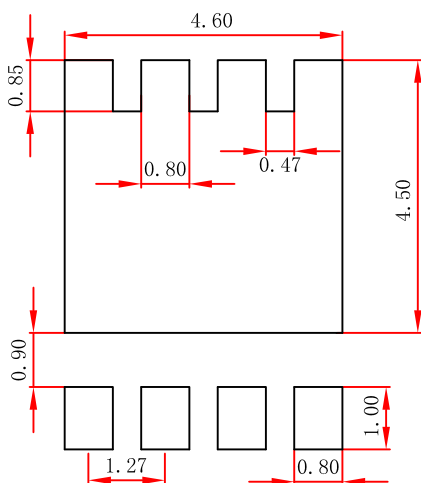


Note:  
1.Controlling dimension;in millimeters.  
2.General tolerance:±0.05mm.  
3.The pad layout is for reference purposes only.

NOTICE

JCET reserve the right to make modifications,enhancements, improvements, corrections or other changes without further notice to any product herein.JCET does not assume any liability arising out of the application or use of any product described herein.


PDFNWB5×6-8L Embossed Carrier Tape

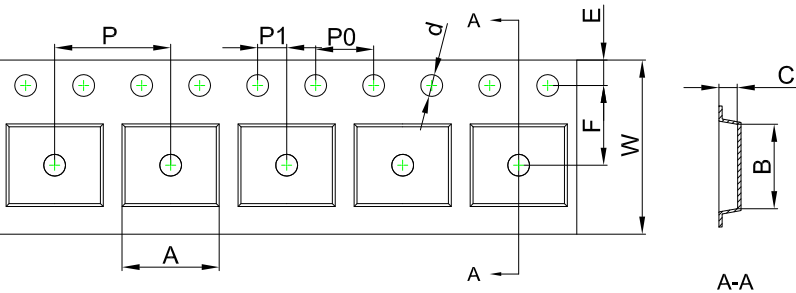


Packaging Description:  
**PDFNWB5×6-8L** parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 5,000 units per 13" or 33.0 cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

| Dimensions are in millimeter |      |      |      |       |      |      |      |      |      |       |
|------------------------------|------|------|------|-------|------|------|------|------|------|-------|
| Pkg type                     | A    | B    | C    | d     | E    | F    | P0   | P    | P1   | W     |
| PDFNWB5×6-8L                 | 6.30 | 5.30 | 1.10 | Ø1.50 | 1.75 | 5.50 | 4.00 | 8.00 | 2.00 | 12.00 |

PDFNWB5×6-8L Tape Leader and Trailer

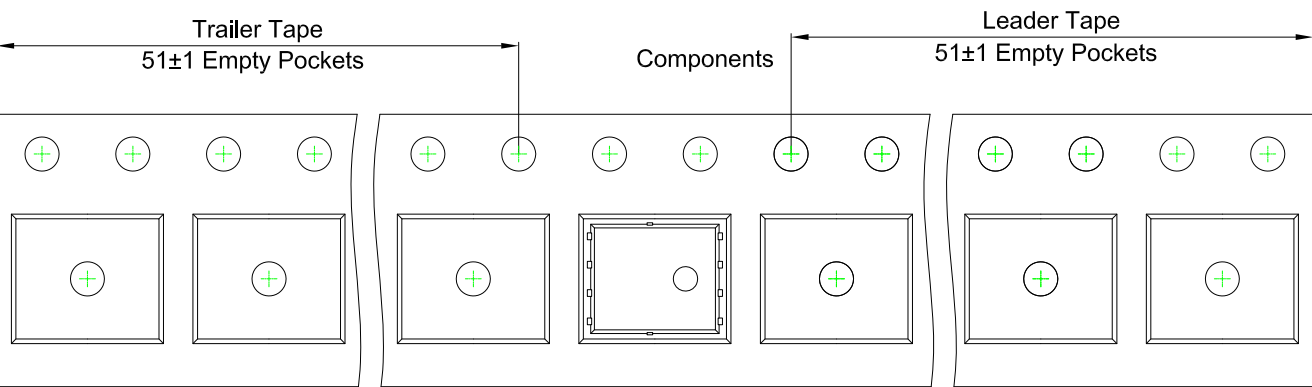

PDFNWB5×6-8L Reel

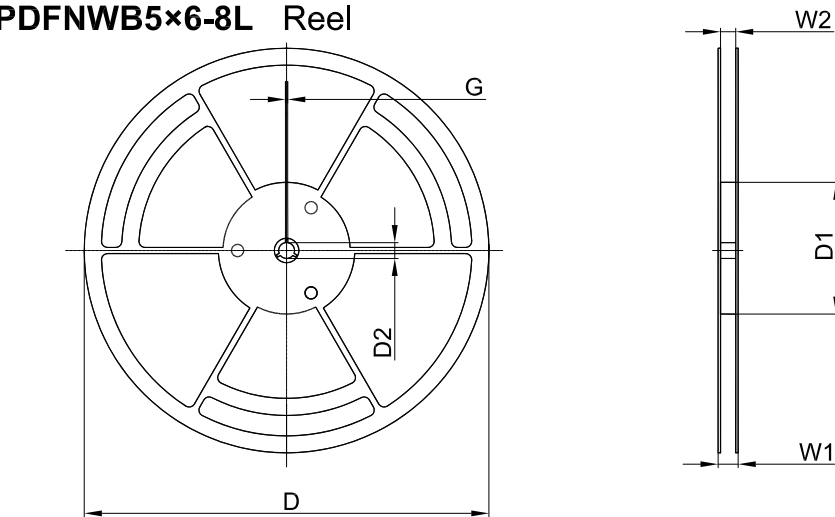

| Dimensions are in millimeter |         |        |       |      |       |       |
|------------------------------|---------|--------|-------|------|-------|-------|
| Reel Option                  | D       | D1     | D2    | G    | W1    | W2    |
| 13"Dia                       | Ø330.00 | 100.00 | 13.00 | 1.90 | 17.60 | 12.40 |

| REEL      | Reel Size | Box       | Box Size(mm) | Carton     | Carton Size(mm) |
|-----------|-----------|-----------|--------------|------------|-----------------|
| 5,000 pcs | 13 inch   | 5,000 pcs | 340×336×29   | 50,000 pcs | 353×346×365     |