


型名: CKH3220

1. 尺寸(毫米)

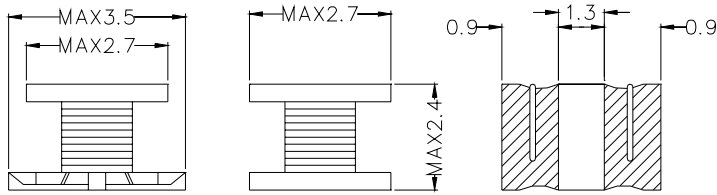

2. 技术参数

NO.	品 名	电感(μ H)	电阻 (m Ω) (MAX)	额定电流 (A)
1	CKH3220-1R0	1.0	500	0.443
2	CKH3220-1R2	1.2	600	0.423
3	CKH3220-1R5	1.5	600	0.400
4	CKH3220-1R8	1.8	700	0.390
5	CKH3220-2R2	2.2	800	0.368
6	CKH3220-2R7	2.7	900	0.320
7	CKH3220-3R3	3.3	1000	0.300
8	CKH3220-3R9	3.9	1100	0.290
9	CKH3220-4R7	4.7	1200	0.268
10	CKH3220-5R6	5.6	1300	0.250
11	CKH3220-6R8	6.8	1500	0.240
12	CKH3220-8R2	8.2	1600	0.223
13	CKH3220-100	10	1800	0.190
14	CKH3220-120	12	2000	0.180
15	CKH3220-150	15	2200	0.170
16	CKH3220-180	18	2500	0.163
17	CKH3220-220	22	2800	0.150
18	CKH3220-270	27	3100	0.123
19	CKH3220-330	33	3500	0.115
20	CKH3220-390	39	3900	0.110
21	CKH3220-470	47	4300	0.100
22	CKH3220-560	56	4900	0.083
23	CKH3220-680	68	5500	0.080
24	CKH3220-820	82	6200	0.070
25	CKH3220-101	100	7000	0.080
26	CKH3220-121	120	8000	0.073
27	CKH3220-151	150	9300	0.070
28	CKH3220-181	180	10200	0.063
29	CKH3220-221	220	11800	0.063
30	CKH3220-271	270	12500	0.063
31	CKH3220-331	330	13000	0.063
32	CKH3220-391	390	22000	0.050
33	CKH3220-471	470	25000	0.043
34	CKH3220-561	560	28000	0.038

无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流