


型名: CKRH3D28/LD



1. 尺寸(毫米)

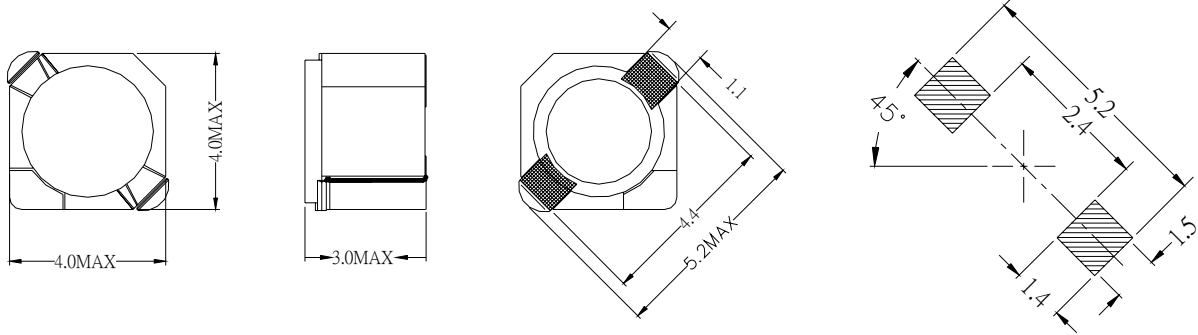

2. 技术参数

NO.	品 名	表示	电感(μ H)	电阻 (m Ω) (MAX)	额定电流 (A)
1	CKRH3D28/LD-100	A	10	95	0.46
2	CKRH3D28/LD-120	B	12	98	0.43
3	CKRH3D28/LD-150	C	15	113	0.38
4	CKRH3D28/LD-180	D	18	125	0.32
5	CKRH3D28/LD-220	E	22	143	0.31
6	CKRH3D28/LD-270	F	27	173	0.27
7	CKRH3D28/LD-330	G	33	215	0.24
8	CKRH3D28/LD-390	H	39	223	0.23
9	CKRH3D28/LD-470	J	47	303	0.22
10	CKRH3D28/LD-560	K	56	323	0.18
11	CKRH3D28/LD-680	L	68	468	0.16
12	CKRH3D28/LD-820	M	82	538	0.15
13	CKRH3D28/LD-101	N	100	608	0.14
14	CKRH3D28/LD-121	P	120	755	0.13
15	CKRH3D28/LD-151	Q	150	878	0.12
16	CKRH3D28/LD-181	R	180	1128	0.11
17	CKRH3D28/LD-221	S	220	1272	0.10

无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流.