


型名: CKRH5D18

1. 尺寸(毫米)

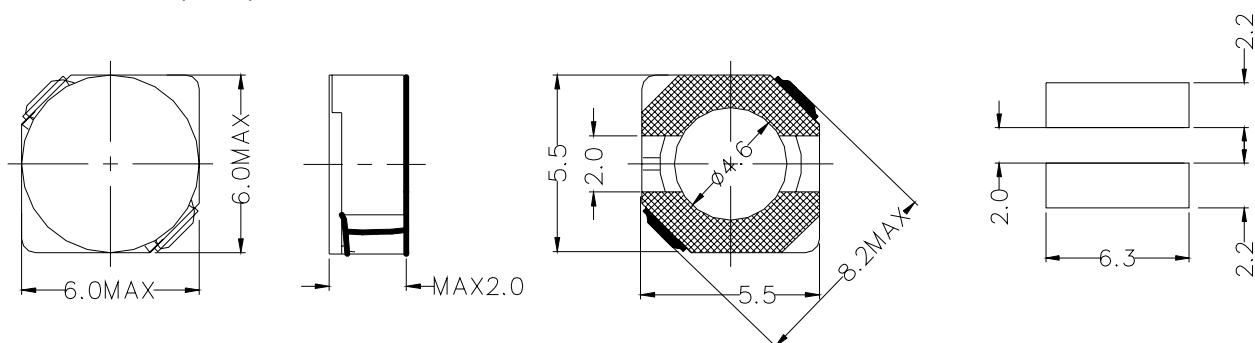

2. 技术参数

NO.	品 名	电感(μ H)	电阻 (m Ω) (MAX)	额定电流 (A)
1	CKRH5D18-4R1	4.1	58	1.90
2	CKRH5D18-5R4	5.4	75	1.58
3	CKRH5D18-6R2	6.2	95	1.38
4	CKRH5D18-8R9	8.9	117	1.21
5	CKRH5D18-100	10	125	1.20
6	CKRH5D18-120	12	150	1.08
7	CKRH5D18-150	15	197	0.94
8	CKRH5D18-180	18	212	0.85
9	CKRH5D18-220	22	290	0.80
10	CKRH5D18-270	27	334	0.70
11	CKRH5D18-330	33	385	0.63
12	CKRH5D18-390	39	517	0.54
13	CKRH5D18-470	47	595	0.53
14	CKRH5D18-560	56	662	0.48
15	CKRH5D18-680	68	840	0.42
16	CKRH5D18-820	82	982	0.40
17	CKRH5D18-101	100	1202	0.36

无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流.

