


型名: CKRH6D18

1. 尺寸(毫米)

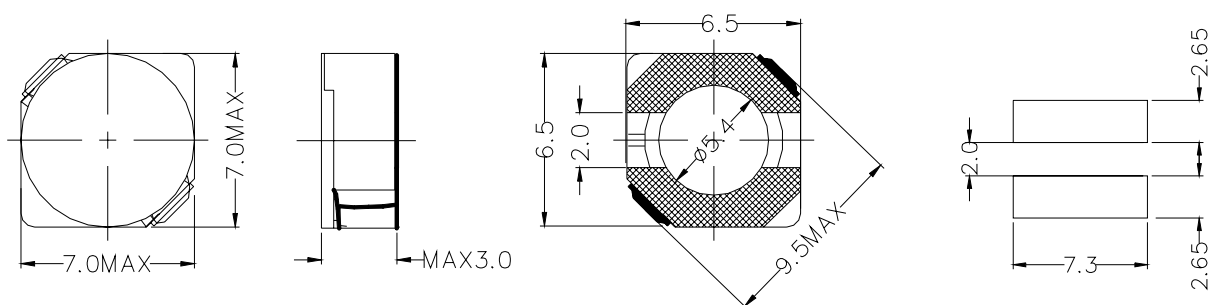

2. 技术参数

NO.	品 名	电感(μ H)	电阻 (m Ω) (MAX)	额定电流 (A)
1	CKRH6D18-1R0	1.0	34	3.48
2	CKRH6D18-1R5	1.5	39	2.80
3	CKRH6D18-2R2	2.2	48	2.50
4	CKRH6D18-2R6	2.6	56	2.28
5	CKRH6D18-3R3	3.3	60	2.20
6	CKRH6D18-4R2	4.2	72	1.90
7	CKRH6D18-6R4	6.4	116	1.48
8	CKRH6D18-100	10.0	158	1.20
9	CKRH6D18-150	15.0	234	0.95
10	CKRH6D18-220	22.0	314	0.78
11	CKRH6D18-330	33.0	480	0.65
12	CKRH6D18-470	47.0	648	0.55
13	CKRH6D18-680	68.0	884	0.43

无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流.

