


型名: CKRH6D28

1. 尺寸(毫米)

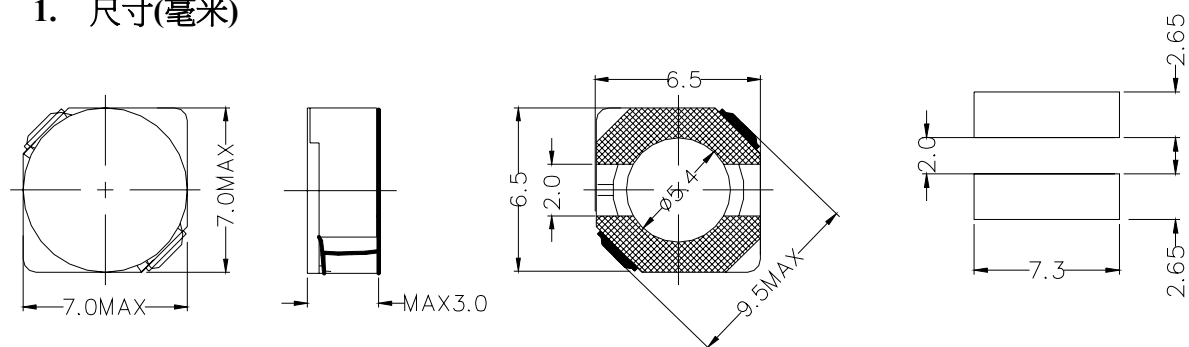

2. 技术参数

NO.	品 名	电感(μ H)	电阻 (m Ω) (MAX)	额定电流 (A)
1	CKRH6D28-3R0	3.0	26	2.94
2	CKRH6D28-3R9	3.9	28	2.58
3	CKRH6D28-5R0	5.0	34	2.38
4	CKRH6D28-6R0	6.0	38	2.22
5	CKRH6D28-7R3	7.3	55	2.09
6	CKRH6D28-8R6	8.6	58	1.84
7	CKRH6D28-100	10	67	1.67
8	CKRH6D28-120	12	72	1.54
9	CKRH6D28-150	15	87	1.37
10	CKRH6D28-180	18	95	1.31
11	CKRH6D28-220	22	128	1.18
12	CKRH6D28-270	27	142	1.02
13	CKRH6D28-330	33	163	0.96
14	CKRH6D28-390	39	212	0.82
15	CKRH6D28-470	47	236	0.78
16	CKRH6D28-560	56	280	0.70
17	CKRH6D28-680	68	305	0.63
18	CKRH6D28-820	82	392	0.56
19	CKRH6D28-101	100	535	0.53

无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流.

