


型名: CKRH74

1. 尺寸(毫米)

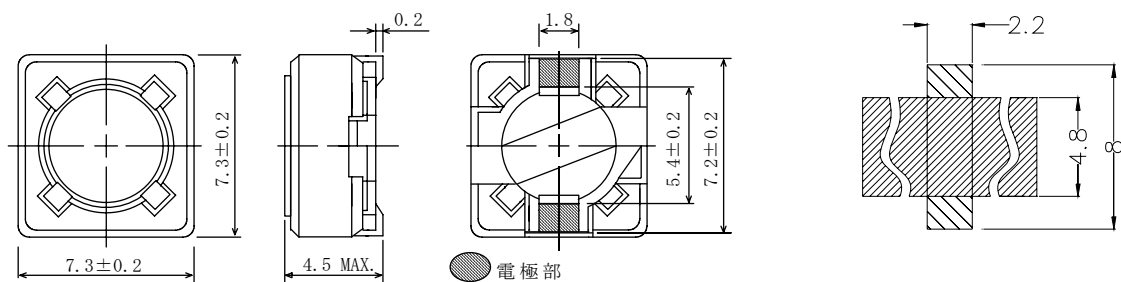

2. 技术参数

NO.	品 名	电感(μ H)	电阻 ($m\Omega$) (MAX)	额定电流 (A)
1	CKRH74-100	10	48	1.82
2	CKRH74-120	12	60	1.70
3	CKRH74-150	15	81	1.47
4	CKRH74-180	18	93	1.30
5	CKRH74-220	22	110	1.23
6	CKRH74-270	27	150	1.12
7	CKRH74-330	33	172	0.94
8	CKRH74-390	39	230	0.91
9	CKRH74-470	47	262	0.86
10	CKRH74-560	56	350	0.75
11	CKRH74-680	68	382	0.67
12	CKRH74-820	82	432	0.61
13	CKRH74-101	100	610	0.60
14	CKRH74-121	120	662	0.50
15	CKRH74-151	150	880	0.46
16	CKRH74-181	180	980	0.40
17	CKRH74-221	220	1170	0.36
18	CKRH74-271	270	1640	0.34
19	CKRH74-331	330	1860	0.32
20	CKRH74-391	390	2850	0.28
21	CKRH74-471	470	3010	0.26
22	CKRH74-561	560	3620	0.23
23	CKRH74-681	680	4630	0.22
24	CKRH74-821	820	5200	0.20
25	CKRH74-102	1000	6000	0.16

无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流.