


PHASE NOISE (1 Hz BW, typical)

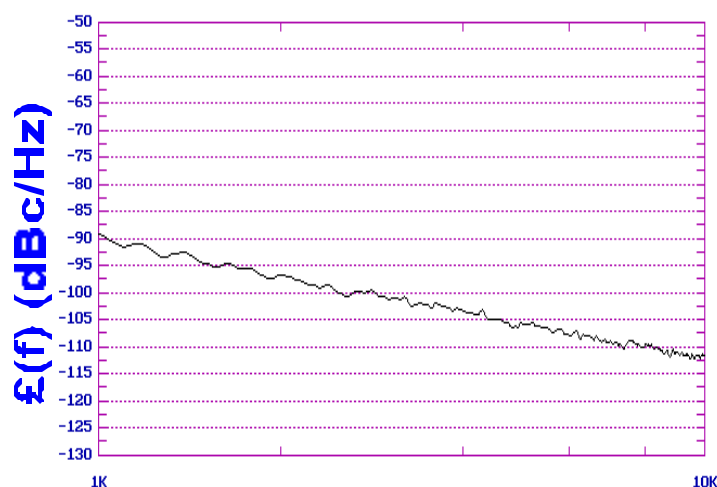

OFFSET (Hz)

FEATURES

- Frequency Range: 800 - 835 MHz
- Tuning Voltage: 0.5-4.5 Vdc
- MINI-16-L - Style Package

APPLICATIONS

- Digital Cellular
- VHF Communications
- Test Equipment

PERFORMANCE SPECIFICATIONS

VALUE

UNITS

Oscillation Frequency Range	800 - 835	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-113	dBc/Hz
Harmonic Suppression (2nd, typ.)	-25	dBc
Tuning Voltage	0.5-4.5	Vdc
Tuning Sensitivity (avg.)	25	MHz/V
Power Output	1.75±2.75	dBm
Load Impedance	50	Ω
Input Capacitance (max.)	100	pF
Pushing	<1	MHz/V
Pulling (14 dB Return Loss, Any Phase)	<1	MHz
Operating Temperature Range	-10 to 85	$^{\circ}\text{C}$
Package Style	MINI-16-L	

POWER SUPPLY REQUIREMENTS

Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	20	mA


All specifications are typical unless otherwise noted and subject to change without notice.

APPLICATION NOTES


- AN-100/1 : Mounting and Grounding of VCOs
- AN-102 : Proper Output Loading of VCOs
- AN-107 : How to Solder Z-COMM VCOs

NOTES:

TUNING CURVE, typ.



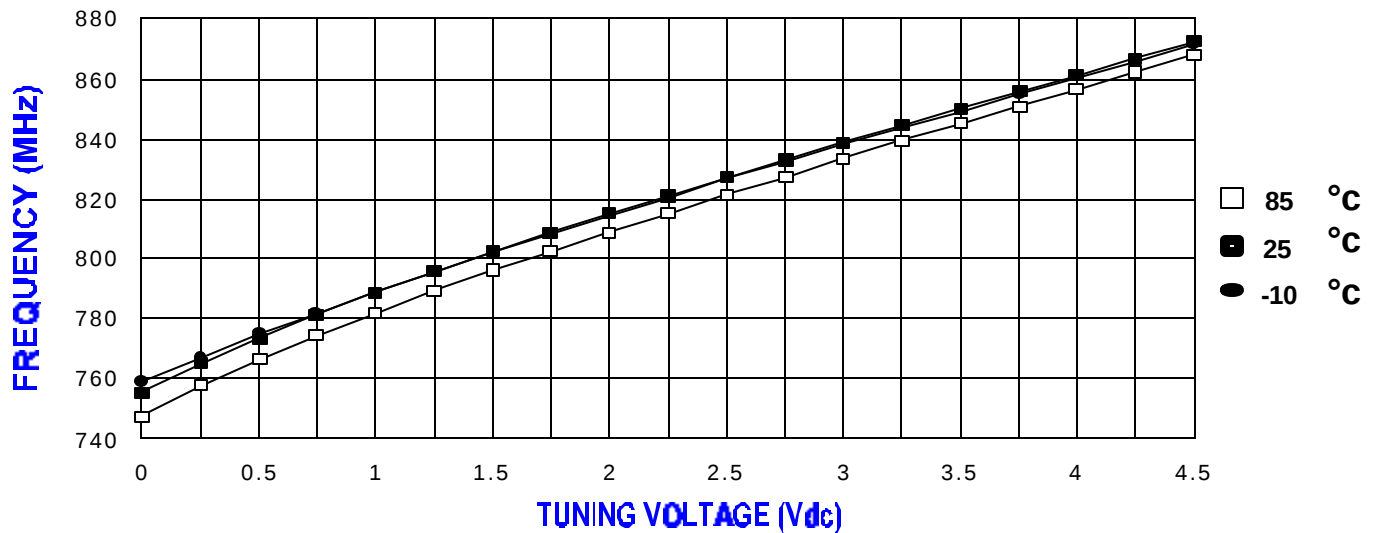


POWER CURVE, typ.

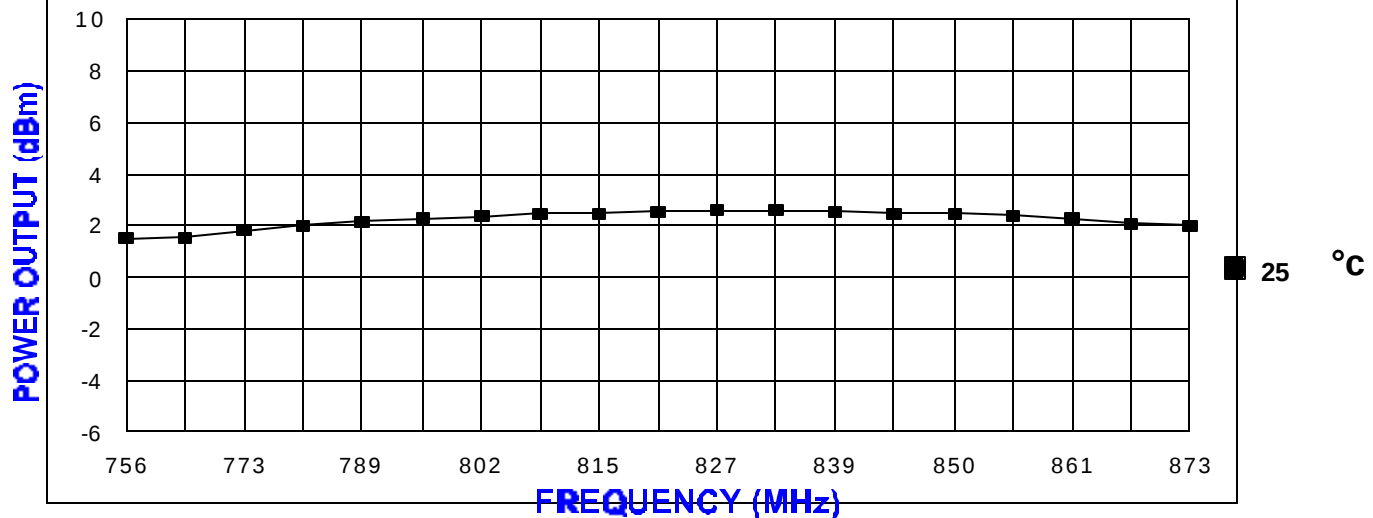

PHYSICAL DIMENSIONS

MINI-16-L
415-0064 REV.B
(DRAWING NOT TO SCALE)



- NOTES:
1. THE INSIDE RADIUS OF ALL 16 HALF HOLES AT THE PERIMETER OF THE BOARD ARE SOLDER PLATED TO PROVIDE A SURFACE FOR THE ATTACHMENT OF THE VCO TO A MOTHERBOARD. IN 13 LOCATIONS, WITH 3 PADS BEING USED FOR ELECTRICAL MECHANICAL INTERFACE. 16 SOLDER LOCATIONS REQUIRED.
 2. THE SURFACE OF THE SHIELD IS TIN PLATED AND MAY BE SOLDERED TO.
 3. THE SHIELD'S BASE METAL IS BRASS. THE GROUND PLANE IS BRASS AND ATTACHES TO A GROUND PLANE ON THE UPPER SIDE OF THE BOARD AS WELL AS THE SHIELD BY PTH. UNLESS OTHERWISE NOTED ALL DIMENSIONS ARE IN INCHES.
 4. UNLESS OTHERWISE NOTED ALL DIMENSIONS ARE AS FOLLOWS:
TOLERANCES
XXX = ± .010
 5. UNLESS OTHERWISE NOTED ALL DIMENSIONS ARE AS FOLLOWS:
TOLERANCES
XXX = ± .010
- PI=V_T
PE=RF OUT
PS=V_{CC}

