




CMDL301

WCS Delay Filter

Revision 1, 9/20/2002

Passband:	2300	– 2360 MHz
Insertion Loss:	0.25	dB max.
Delay:	3.8	nS +/- 0.2 nS
Return Loss:	2	5 dB min.
Power:	50	Watts Average, 1250 Watts PIP
Connectors:	S	MA Male
Outline Dimensions:	Per Outline CMDL301 Rev.	
Operation Temp:	10° to +70°C	
Storage Temp:	-40	° to +85°C

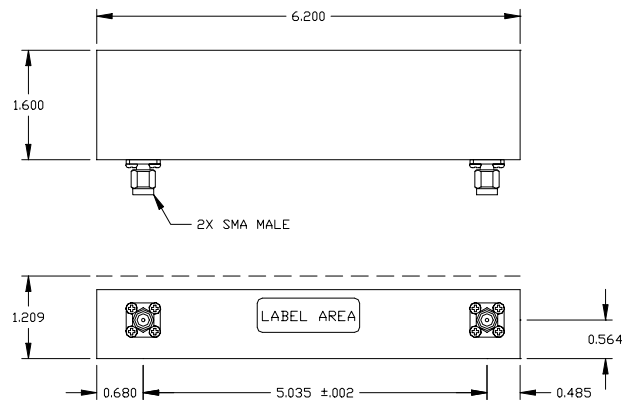


NOTES: UNLESS OTHERWISE SPECIFIED

1. MARKING: LABEL

2. FINISH: TBD
COLOR NO. TBD

3. CONNECTOR THREADS AND MOUNTING HOLES ARE
PAINT FREE.

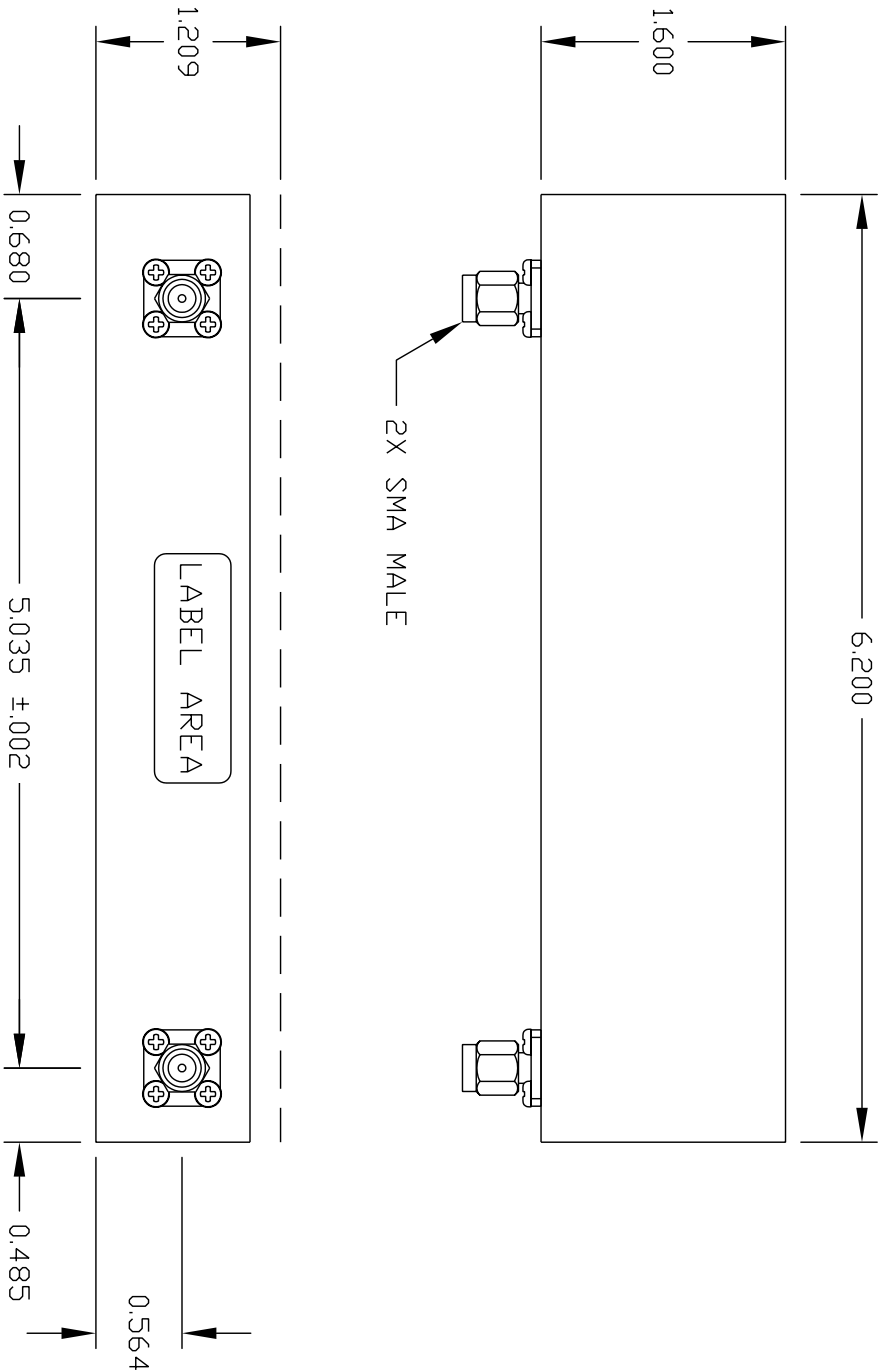

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY
PROPERTY OF COMMERCIAL MICROWAVE TECHNOLOGY. THIS
DOCUMENT IS RECEIVED IN CONFIDENCE AND ITS CONTENTS MAY NOT
BE DISCLOSED WITHOUT THE PRIOR WRITTEN CONSENT OF
COMMERCIAL MICROWAVE TECHNOLOGY

COMMERCIAL MICROWAVE TECHNOLOGY, INC.									
DRAWN: MJS		07/10/2002			TOLERANCES:				
ENG:					.XX: ± .01 .XXX: ± .005 .XXXX: ± .0005 ANGLES: ± 1°				
RELEASED:									
SIZE A		DWG NO.		OUTLINE		CMDL301		REV 1	
CAGE:		1SCX4		SHEET		1 OF 1			