

13.5-15.5 GHz 1.5W QFN Plastic Packaged Power Amplifier

Mimix
BROADBAND™
CMQ1432-QH
RoHS


May 2006 - Rev 23-May-06

Features

- ✕ 32dBm (Typ) Saturated Output Power
- ✕ 32dB (Typ) Linear Gain
- ✕ ESD Protection On Die
- ✕ Unconditionally Stable
- ✕ Low Cost, Surface Mount Package
- ✕ 4x4x1.4 mm
- ✕ RoHS Compliant
- ✕ 7V, 770mA

Applications

- ✕ Ku-Band VSAT Transmit Subsystems

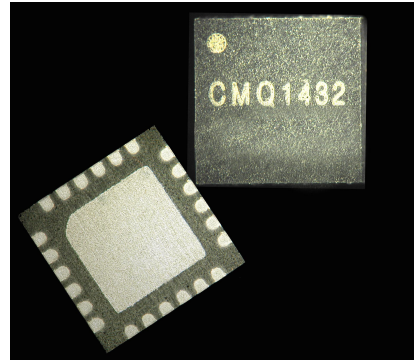

General Description

The CMQ1432-QH is a pHEMT power amplifier packaged in a 4X4 QFN plastic package. The CMQ1631-QH is self contained with 50 ohm input and output terminals. The PAM is unconditionally stable and the internal matching allows for a reduction in external components making this product a simple and low cost solution. RoHS compliance and on-chip ESD protection make it an ideal solution in all manufacturing environments. The power amplifier is intended for use as the final RF amplifier in the extended Ku-Band satellite applications.

Absolute Maximum Ratings

Drain Voltage (+Vdd)	+8 V
Gate Voltage (Vgg)	-3 V
Quiescent Current (Idq)	1000 mA
Gate Current (Ig)	5 mA
RF Input Power (Pin)	+11 dBm
Dissipated Power (Piss)	8 W
Storage Temperature	-50 °C to +150 °C
Operating Backside Temperature	-40 °C to +80 °C

Electrical Characteristics (T = +25°C, Vd = 7V, Id = 770mA)

Parameter	Units	Min.	Typ.	Max.
Operating Frequency (F)	GHz	13.5		15.5
Drain Current (At Saturation) (Id)	mA		770	
Drain Voltage (Vd)	Volts	6	7	7.5
Gate Voltage (RF ON) (Vg)	Volts	-2	-	-0.2
Linear Gain (S21)	dB		33	
Input Reflection Coefficient (S11)	dB		-11	
Output Reflection Coefficient (S22)	dB		-8	
Noise Figure (NF)	dB		9	
Saturated Output Power (Psat)	dBm		32	
Power @ 1dB Compression Gain (P1dB)	dBm		29	
Power Added Efficiency (At Saturation) (PAE)	%		27	
Gate Current (Igs)	mA	-	0.5	5

Electrical Specifications (TA = -25C to 80C) Operation outside these limits can cause permanent damage.

Parameter	Condition	Units	Min	Typ	Max
Saturated Output Power	Variation from room temperature	dB	-0.7		
Linear Gain	Variation from room temperature	dB	-2.5		2.5
Stability			Unconditional Stable		

Mimix Broadband, Inc., 10795 Rockley Rd., Houston, Texas 77099
Tel: 281.988.4600 Fax: 281.988.4615 mimixbroadband.com

Page 1 of 7

Characteristic Data and Specifications are subject to change without notice. ©2006 Mimix Broadband, Inc.
Export of this item may require appropriate export licensing from the U.S. Government. In purchasing these parts, U.S. Domestic customers accept their obligation to be compliant with U.S. Export Laws.







13.5-15.5 GHz 1.5W QFN Plastic Packaged Power Amplifier

Mimix
BROADBAND™

May 2006 - Rev 23-May-06

CMQI432-QH
RoHS

Typical Performance

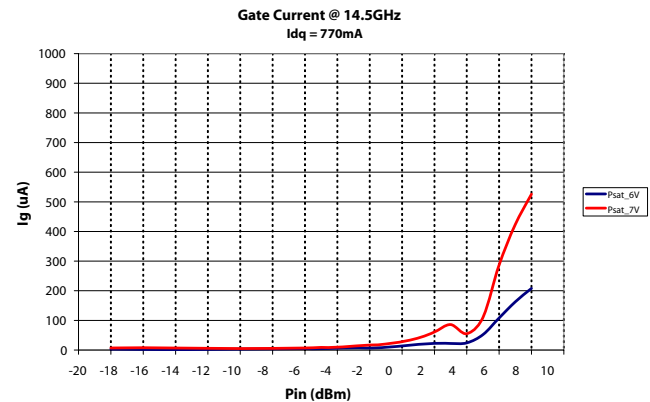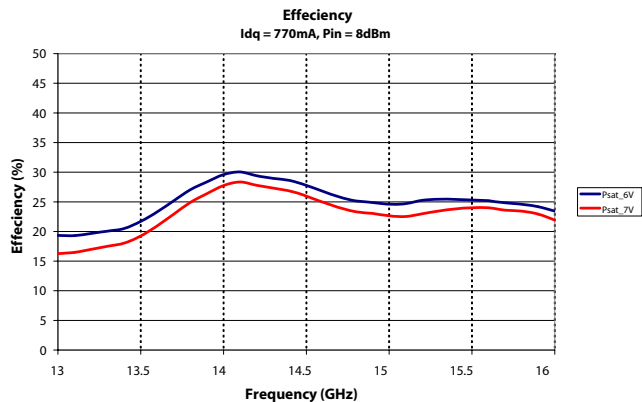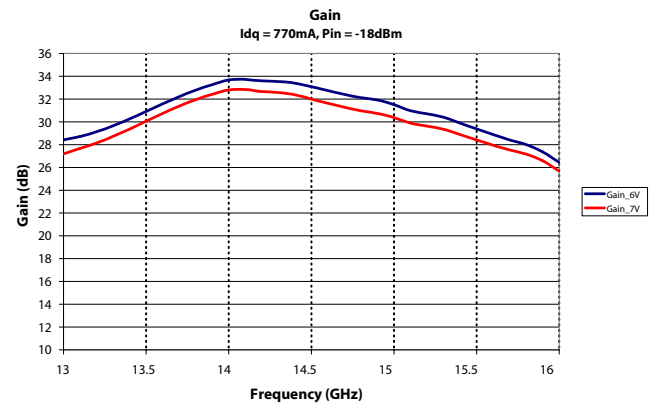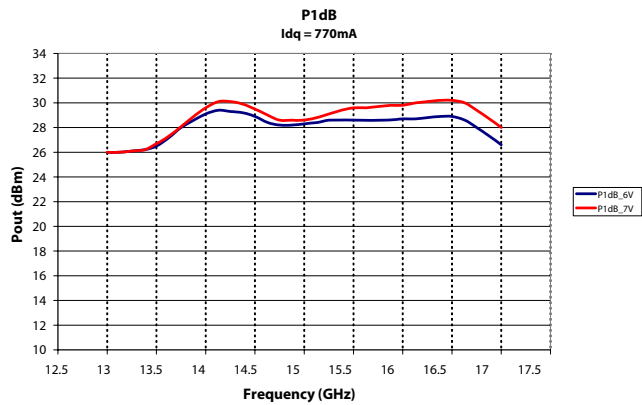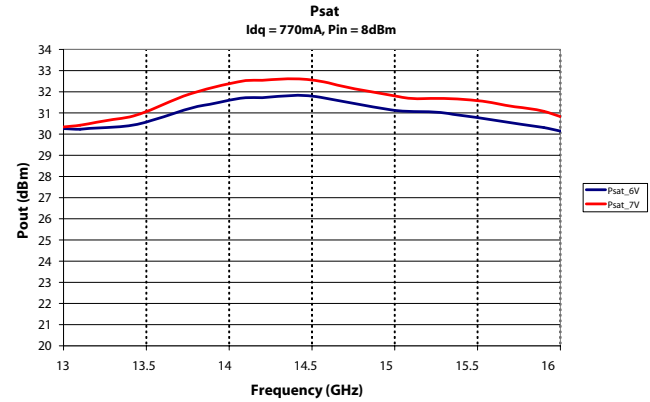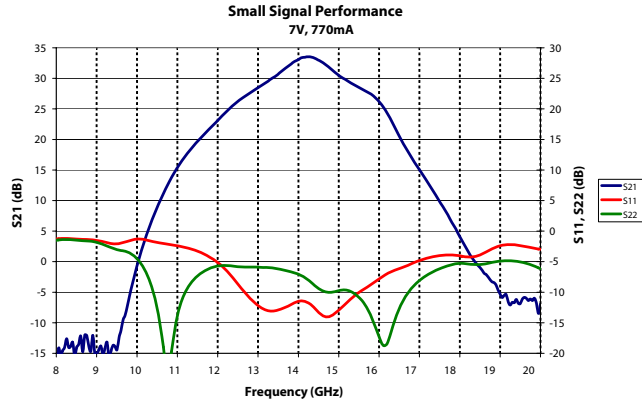







13.5-15.5 GHz 1.5W QFN Plastic Packaged Power Amplifier

Mimix
BROADBAND™

May 2006 - Rev 23-May-06

CMQI432-QH
RoHS

Typical Performance

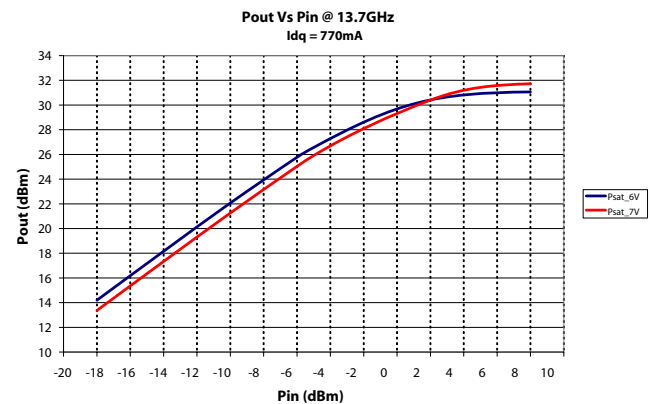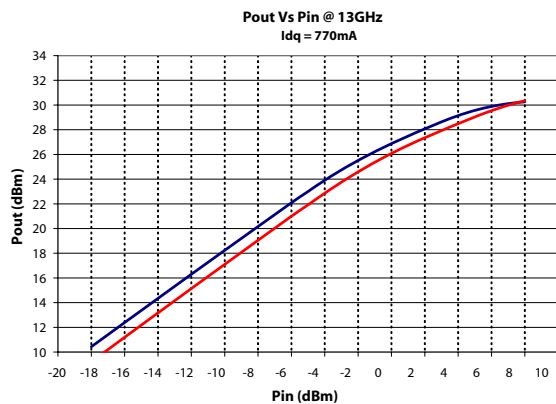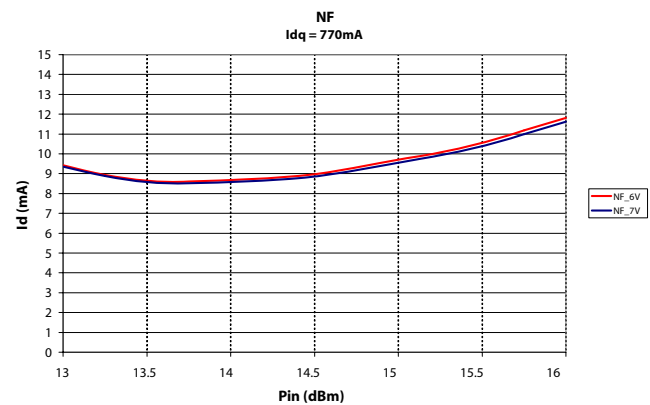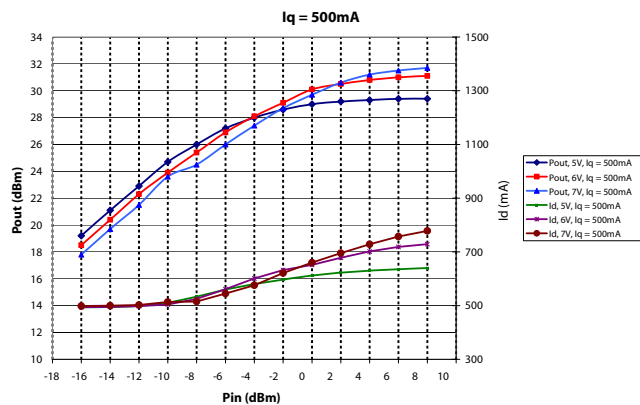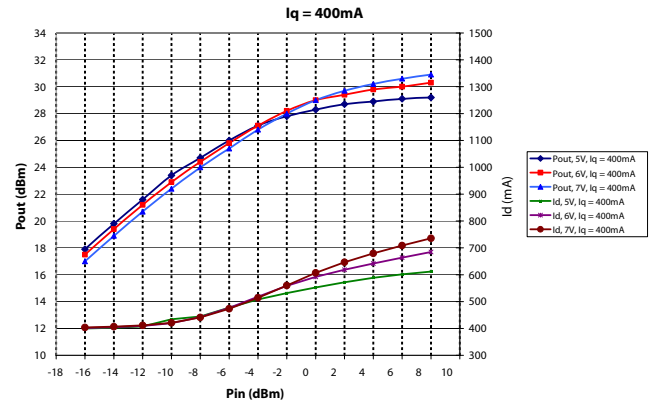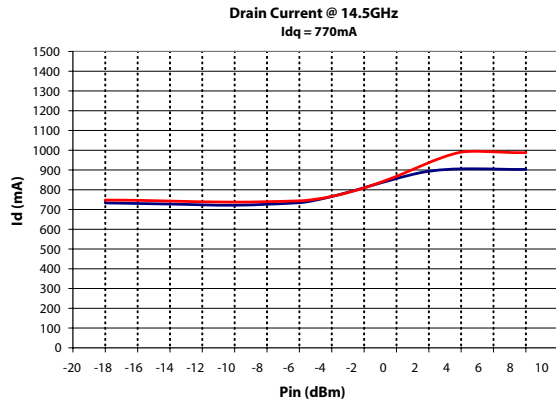





13.5-15.5 GHz 1.5W QFN Plastic Packaged Power Amplifier

Mimix
BROADBAND™

May 2006 - Rev 23-May-06

CMQI432-QH
RoHS

Typical Performance

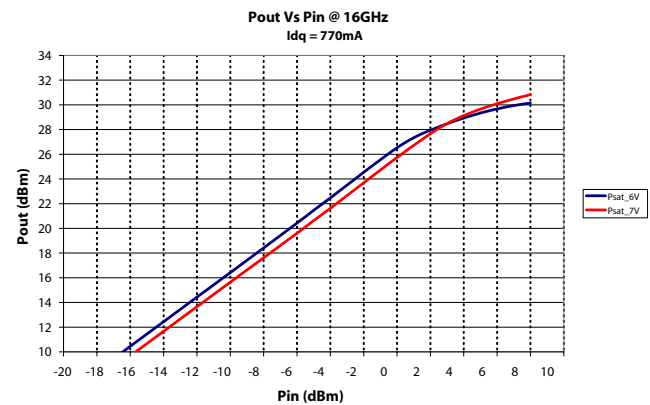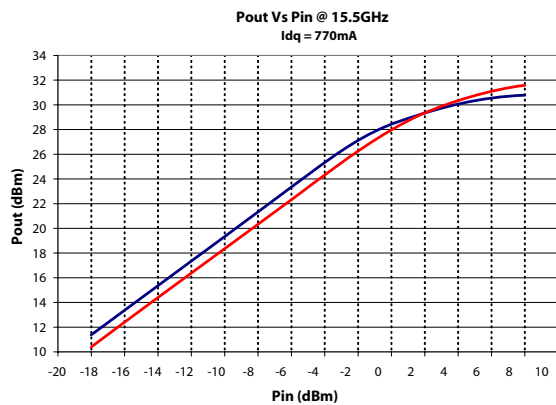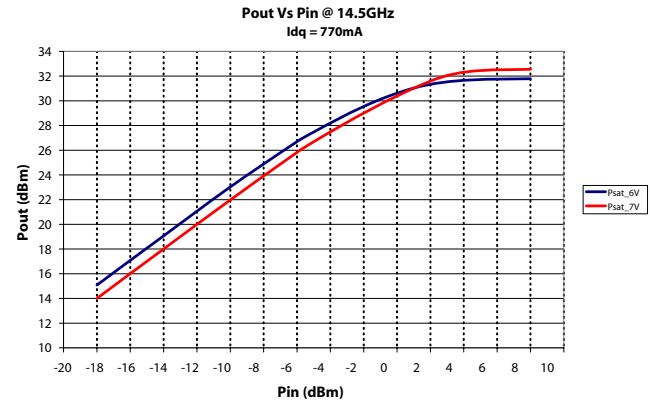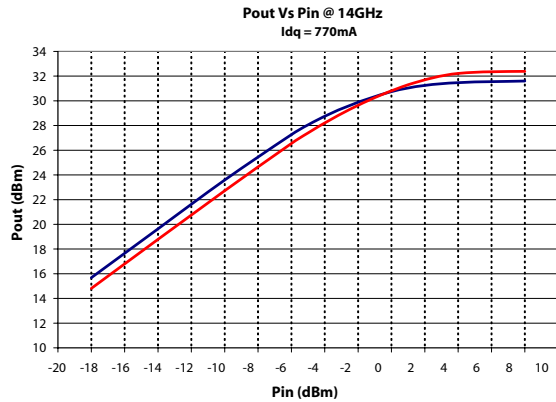


13.5-15.5 GHz 1.5W QFN Plastic Packaged Power Amplifier


Mimix
BROADBAND™
CMQI432-QH
RoHS

May 2006 - Rev 23-May-06

Recommended Application Circuit

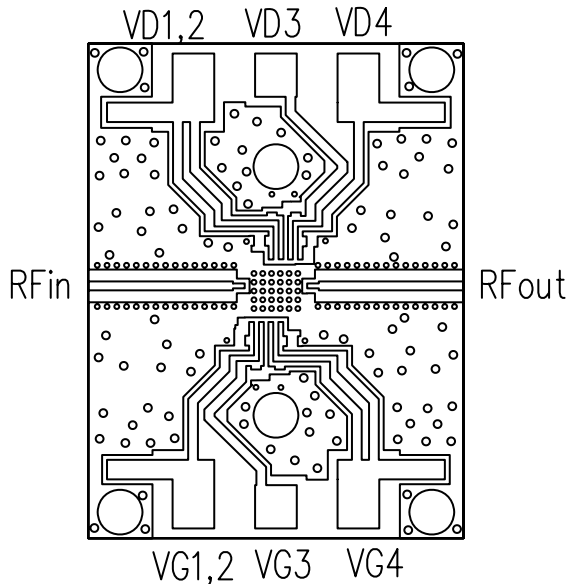

Schematic

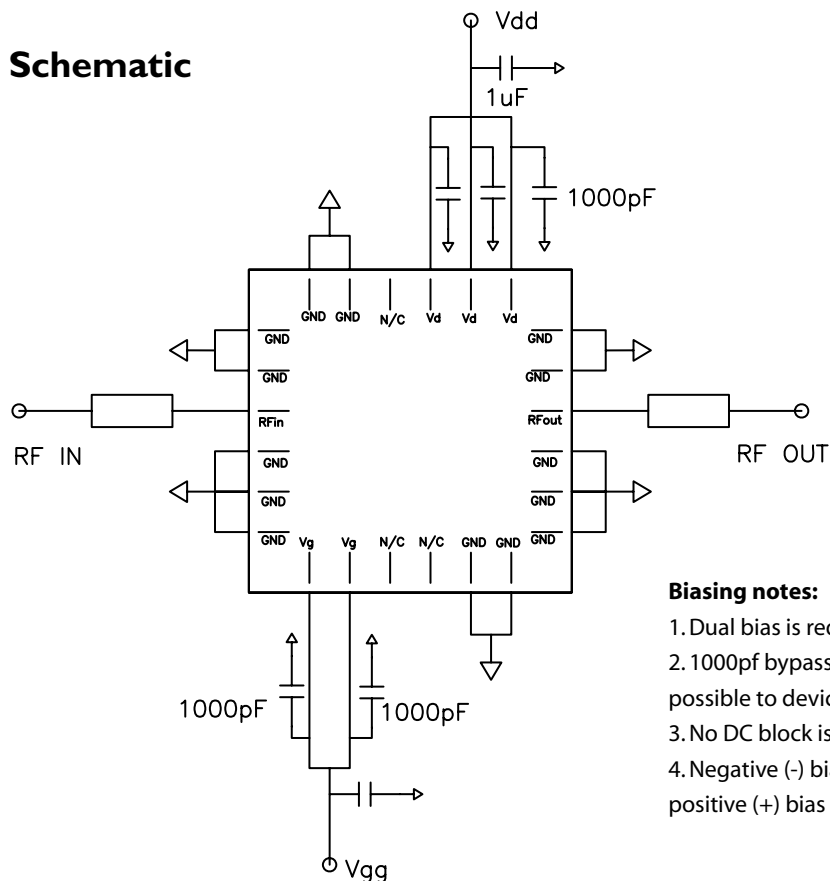

Biasing notes:

1. Dual bias is required.
2. 1000pf bypass capacitors are needed on PC board as close as possible to device as shown in the schematic.
3. No DC block is required at RF IN/OUT
4. Negative (-) bias must be applied to Vgg before applying positive (+) bias to Vdd.

Mimix Broadband, Inc., 10795 Rockley Rd., Houston, Texas 77099
Tel: 281.988.4600 Fax: 281.988.4615 mimixbroadband.com

Page 5 of 7

Characteristic Data and Specifications are subject to change without notice. ©2006 Mimix Broadband, Inc.
Export of this item may require appropriate export licensing from the U.S. Government. In purchasing these parts, U.S. Domestic customers accept their obligation to be compliant with U.S. Export Laws.


13.5-15.5 GHz 1.5W QFN Plastic Packaged Power Amplifier

Mimix
BROADBAND™

May 2006 - Rev 23-May-06

CMQ1432-QH
RoHS

Physical Dimensions

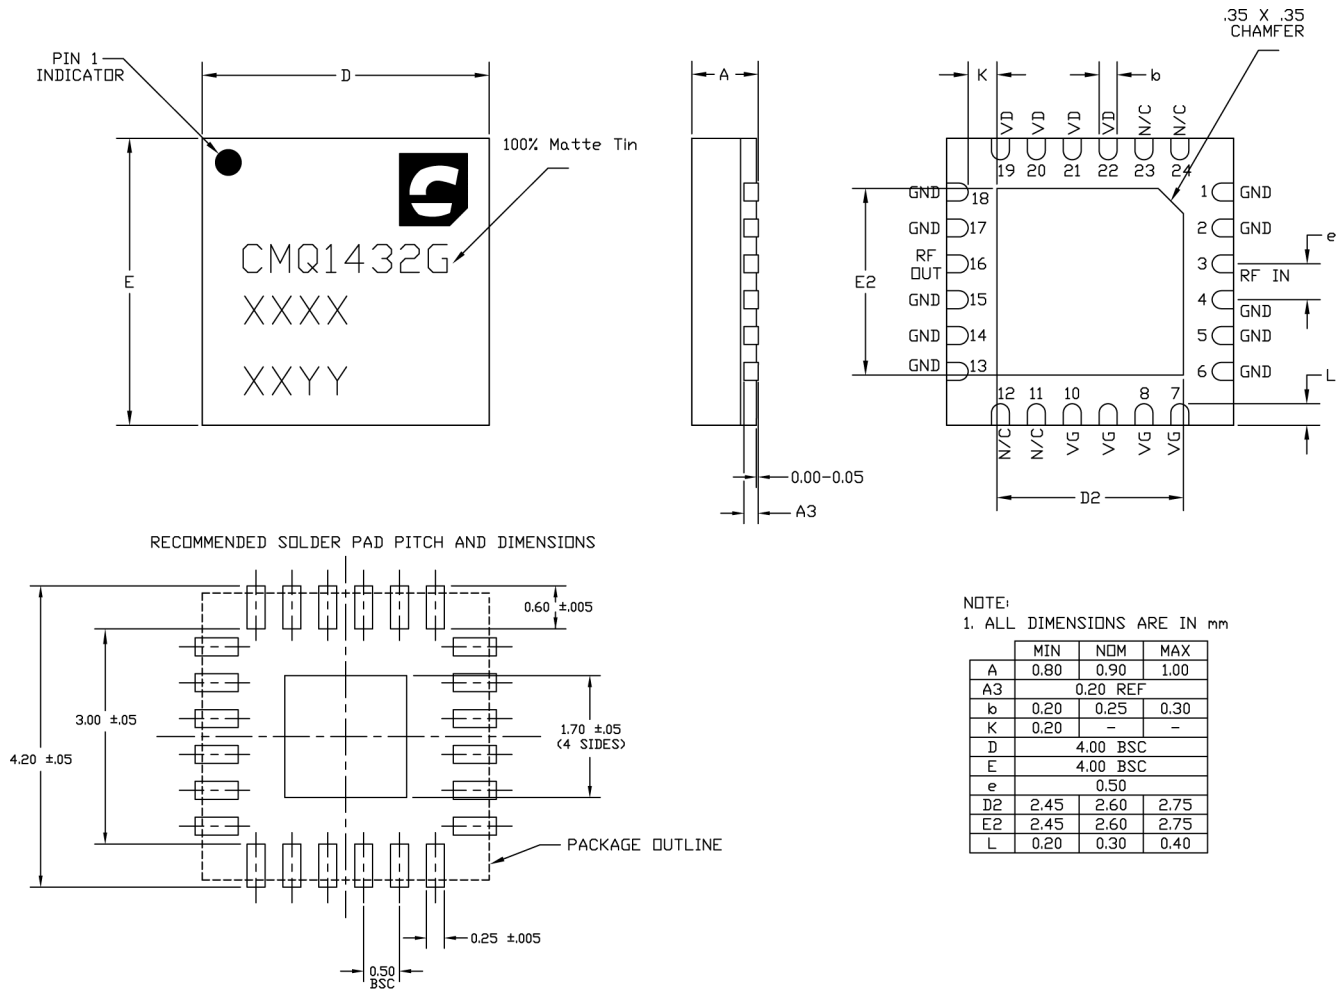

Ordering Information

Part Number for Ordering

CMQ1432-QH-0G00
CMQ1432-QH-0G0T
PB-CMQ1631-QH-0000

Description

Matte Tin plated RoHS compliant QFN4X4 24L surface mount package in bulk quantity
Matte Tin plated RoHS compliant QFN4X4 24L Surface mount package in tape and reel
CMQ1431-QH Evaluation Board


We also offer this part with SnPb (Tin-Lead) or NiPdAu plating. Please contact your regional sales manager for more information regarding different plating types.

Mimix Broadband, Inc., 10795 Rockley Rd., Houston, Texas 77099
Tel: 281.988.4600 Fax: 281.988.4615 mimixbroadband.com

Page 6 of 7

Characteristic Data and Specifications are subject to change without notice. ©2006 Mimix Broadband, Inc.
Export of this item may require appropriate export licensing from the U.S. Government. In purchasing these parts, U.S. Domestic customers accept their obligation to be compliant with U.S. Export Laws.

13.5-15.5 GHz 1.5W QFN Plastic Packaged Power Amplifier



May 2006 - Rev 23-May-06

Handling and Assembly Information

CAUTION! - Mimix Broadband MMIC Products contain gallium arsenide (GaAs) which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- Do not ingest.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.

Life Support Policy - Mimix Broadband's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President and General Counsel of Mimix Broadband. As used herein: (1) Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user. (2) A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Package Attachment - This packaged product from Mimix Broadband is provided as a rugged surface mount package compatible with high volume solder installation. Care should be taken not to apply heavy pressure to the top or base material to avoid package damage. Vacuum tools or other suitable pick and place equipment may be used to pick and place this part. Care should be taken to ensure that there are no voids or gaps in the solder connection so that good RF, DC and ground connections are maintained. Voids or gaps can eventually lead not only to RF performance degradation, but reduced reliability and life of the product due to thermal stress.

Mimix Lead-Free RoHS Compliant Program - Mimix has an active program in place to meet customer and governmental requirements for eliminating lead (Pb) and other environmentally hazardous materials from our products. All Mimix RoHS compliant components are form, fit and functional replacements for their non-RoHS equivalents. Lead plating of our RoHS compliant parts is 100% matte tin (Sn) over copper alloy and is backwards compatible with current standard SnPb low-temperature reflow processes as well as higher temperature (260°C reflow) "Pb Free" processes.

Part Numbering Designator - For Mimix/Celeritek lead-free products, the letter "G" will be used in the part number for Matte Tin finished RoHS Compliant components and "L" will be used in the part number of NiPdAu finished RoHS Compliant components in the second position of the part number suffix, as shown below:

Example A: CXX1234-XX-0G00 = component bulk quantity Matte Tin finished RoHS compliant parts

Example B: CXX1234-XX-0L0T = component in tape and reel NiPdAu finished RoHS parts

For those customers not making the change at this time, Mimix/Celeritek will maintain production of current configurations. For questions and comments e-mail: ourearth@mimixbroadband.com.