

Octal E1/T1/J1 Short Haul Line Interface Unit

CP5009_PB_Rev1.0, March,2005


OVERVIEW

www.datasheet4u.com

The CP5009 is an 8 Channel E1/T1/J1 LIU designed by Chiphomer Technology Limited. It integrates 8 independent receivers and transmitters on a single chip. Together with CP5018, the CP5009 can provide interface function between E1/T1/J1 line and PCM Highway.

FEATURES

- Pin and Software compatible with CP5008/CH5008
- Supports 110ohm J1, 100ohm T1, 75ohm E1 coaxial and 120ohm E1 twisted pair applications
- Programmable Waveform Shaper
- Line Coding Error Counting and Insertion
- Crystal-less jitter attenuator
 - Constant throughput delay
 - Complies with ITU G.736, G.742, G.823 and ETSI CTR12/13 specification
 - Optimized for SDH applications, complies with ITU G.783 mapping jitter specification
- LOS detector complies with ITU G.775, ETSI ETS 300 233 and T1.231
- Provides non-intrusive Protected Monitoring Points (PMP) per ITU G.772
- Transmit return loss exceeds ETSI ETS 300166
- AMI or HDB3/B8ZS encoder/decoder
- Analog, digital, remote and Inband Loopback for testing purpose
- Hitless Protection Switching (HPS) for 1 to 1 protection without relays
- IEEE 1149.1 JTAG boundary scan

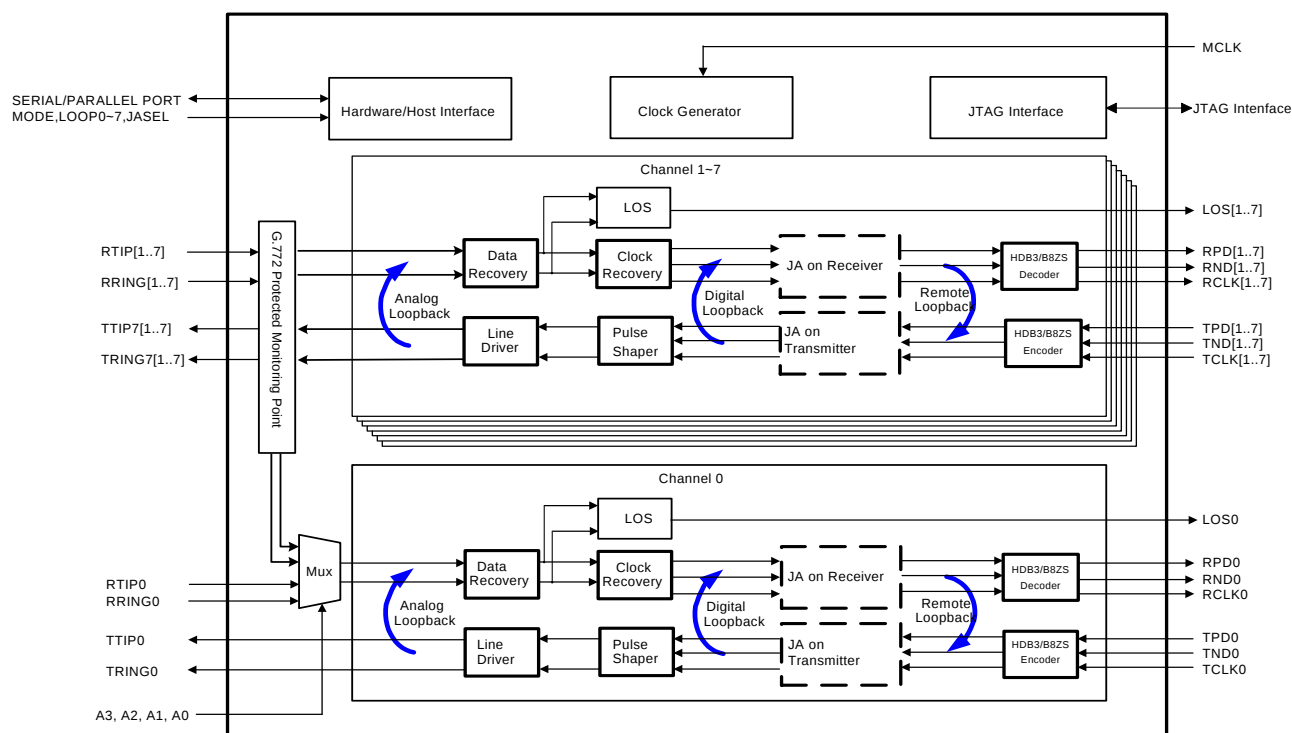
LQFP144
-40 ~ 85°C


Octal E1/T1/J1 Short Haul Line Interface Unit


CP5009_PB_Rev1.0, March,2005

- Selectable parallel/serial host interface
- Hardware and software control modes
- 3.3V supply with 5V tolerant I/O
- Ultra low power consumption, 120mw per channel (typ.)
- Operating industrial temperature range: -40℃ ~ 85℃
- LQFP144 package

APPLICATIONS

- SDH tributary interfaces
- SONET/SDH multiplexers
- Digital access cross connection
- Microwave transmission systems
- PBX interfaces

TYPICAL APPLICATION

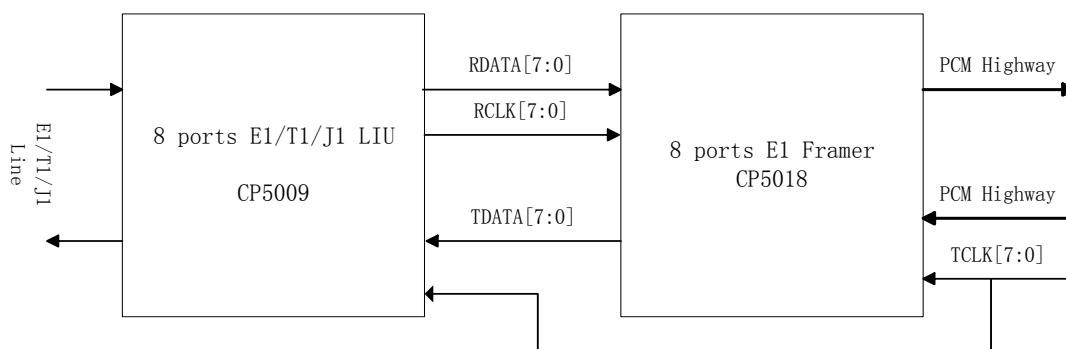

RELATED PRODUCTS

- CH5008: 8ch E1 LIU
- CP5008: 8ch E1 LIU Enhancement
- CP5018: 8ch E1 Framer