

用途：用于高功率 DC/DC 转换和功率开关。


Purpose: These devices are well suited for high efficiency switching DC/DC converters and switch mode power supplies.

特点：低栅电荷, 低反馈电容, 开关速度快。

Features: Low gate charge, low crss, fast switching.

极限参数/Absolute maximum ratings(Ta=25℃)

参数符号 Symbol	数值 Rating	单位 Unit
V_{DSS}	600	V
$I_D(T_c=25^{\circ}C)$	9.5	A
$I_D(T_c=100^{\circ}C)$	5.7	A
I_{DM}	38	A
V_{GSS}	± 20	V
E_{AS}	700	mJ
E_{AR}	15.6	mJ
I_{AR}	9.5	A
$R_{\theta JC}$	2.5	$^{\circ}C/W$
$R_{\theta JA}$	62.5	$^{\circ}C/W$
$P_D(T_c=25^{\circ}C)$	50	W
T_J, T_{STG}	-55 to 150	$^{\circ}C$

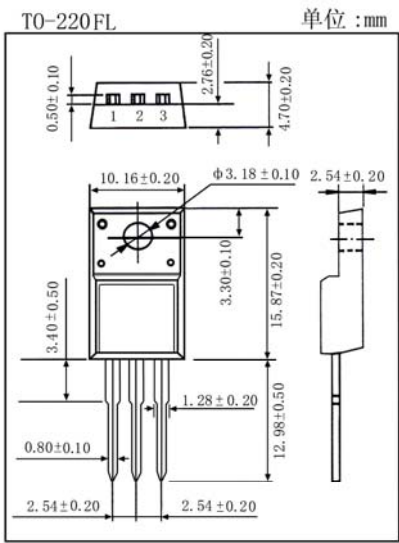

引脚： 1.G 2.D 3.S

电性能参数/Electrical Characteristics(Ta=25℃)

参数符号 Symbol	测试条件 Test Conditions		最小值 Min	典型值 Typ	最大值 Max	单位 Unit
BV_{DSS}	$V_{GS}=0V$	$I_D=250\mu A$	600			V
I_{DSS}	$V_{DS}=600V$	$V_{GS}=0V$			1.0	μA
	$V_{DS}=480V$	$T_c=125^{\circ}C$			10	μA
I_{GSS}	$V_{GS}=\pm 20V$	$V_{DS}=0V$			± 10	μA
$V_{GS(th)}$	$V_{DS}=V_{GS}$	$I_D=250\mu A$	2.0		4.0	V
$R_{DS(on)}$	$V_{GS}=10V$	$I_D=4.75A$		0.6	0.73	Ω
g_{FS}	$V_{DS}=40V$	$I_D=4.75A$		8.0		S
V_{SD}	$V_{GS}=0V$	$I_S=9.5A$			1.4	V
C_{iss}	$V_{DS}=25V$ $V_{GS}=0V$ $f=1.0MHz$			1570	2040	pF
C_{oss}				166	215	
C_{rss}				18	24	
$t_{d(on)}$	$V_{DD}=300V$ $I_D=9.5A$ $R_G=25\Omega$			23	55	ns
t_r				69	150	
$t_{d(off)}$				144	300	
t_f				77	165	

BRF10N60 (CS10N60F)

