



CS1215D1A

主要参数 MAIN CHARACTERISTICS

$I_{T(RMS)}$	12A
V_{DRM}/V_{RRM}	400V
I_{GT}	1-15mA

用途

- 半交流开关
- 相位控制

APPLICATIONS

- Half AC switching
- Phase control


产品特性

- 玻璃钝化芯片，高可靠性和一致性
- 低通态电流和高浪涌电流能力
- 环保 RoHS 产品





FEATURES

- Glass-passivated mesa chip for reliability and uniform
- Low on-state voltage and High I_{TSM}
- RoHS products

封装 Package



序号 Pin	引线名称 Description
1	阴极 K
2	阳极 A
3	门极 G



订货信息 ORDER MESSAGE

订 货 型 号 Order codes				印 记 Marking	封 装 Package
有卤-条管	无卤-条管	有卤-袋装	无卤-袋装	CS1215D1A	TO-220
Halogen-Tube	Halogen-Free-Tube	Halogen-Bag	Halogen-Free-Bag		
CS1215D1A-CA-B	CS1215D1A-CA-BR	CS1215D1A-CA-C	CS1215D1A-CA-CR		
CS1215D1A-C-B	CS1215D1A-C-BR	CS1215D1A-C-C	CS1215D1A-C-CR	CS1215D1A	TO-220C
CS1215D1A-F1-B	CS1215D1A-F1-BR	CS1215D1A-F1-C	CS1215D1A-F1-CR	CS1215D1A	TO-220MF-K1





CS1215D1A

CS1215D1A-S-B	CS1215D1A-S-BR	CS1215D1A-S-C	CS1215D1A-S-CR	CS1215D1A	TO-263
有卤-编带	无卤-编带	有卤-袋装	无卤-袋装	CS1215D1A	DPAK
Halogen-Reel	Halogen-Free-Reel	Halogen- Bag	Halogen-Free-Bag		
CS1215D1A-R-A	CS1215D1A-R-AR	CS1215D1A-R-C	CS1215D1A-R-CR		

绝对最大额定值 ABSOLUTE RATINGS (Tc=25°C)

项 目 Parameter	符 号 Symbol	数 值 Value	单 位 Unit
断态重复峰值电压 Repetitive peak off-state voltage	V_{DRM}	400	V
反向重复峰值电压 Repetitive peak reverse voltage	V_{RRM}	400	V
通态平均电流 Average on-state current (half sine wave)	$I_T(AV)$	7.5	A
通态方均根电流 On-state RMS current (all conduction angles)	$I_{T(RMS)}$	12	A
非重复浪涌峰值通态电流 Non- repetitive surge peak on-state current (half sine wave ,t=10ms)	I_{TSM}	1300	A
I^2t for fusing (t=10ms)	I^2t	60	A ² s
门极峰值电流 Peak gate current	I_{GM}	2	A
门极峰值电压 Peak gate voltage	V_{GM}	5	V
反向门极峰值电压 Peak reverses gate voltage	V_{RGM}	5	V
门极峰值功率 Peak gate power	P_{GM}	5	W
门极平均功率 Average gate power (over any 20ms period)	$P_{G(AV)}$	0.5	W
存储温度 Storage temperature	T_{stg}	-40~150	°C
操作结温 Operation junction temperature	T_J	125	°C

静态特性 STATIC CHARACTERISTICS (Tc=25°C unless otherwise stated)

项 目 Parameter	符号 Symbol	测试条件 Tests conditions	最小 min	典型 typ	最大 max	单位 Unit
断态峰值重复电流 Peak Repetitive Blocking Current	I_{DRM}	$V_{DM}=V_{DRM(MAX)}$, $T_J=125^{\circ}C$	-	-	1.0	mA
反向峰值重复电流 Peak Repetitive Reverse Current	I_{RRM}	$V_{RM}=V_{RRM(MAX)}$, $T_J=125^{\circ}C$	-	-	1.0	mA
峰值通态电压 Peak on-state voltage	V_{TM}	$I_{TM}=23A$	-	1.40	1.75	V
门极触发电流 Gate trigger current	I_{GT}	$V_{DM}=12V, I_T=0.1A$	1	4	15	mA
门极触发电压 Gate trigger voltage	V_{GT}	$V_{DM}=12V, I_T=0.1A$	-	0.8	1.5	V
维持电流 Holding current	I_H	$V_{DM}=12V, I_{GT}=0.1A$	-	-	25	mA
擎住电流 Latching current	I_L	$V_{DM}=12V, I_{GT}=0.1A$	-	-	40	mA



动态特性 DYNAMIC CHARACTERISTICS ($T_c=25^{\circ}\text{C}$ unless otherwise stated)

项 目 Parameter	符 号 Symbol	测试条件 Tests conditions	最小 min	典型 typ	最大 max	单位 Unit
断态临界电压上升率 Critical rate of rise of off- state voltage	dV/dt	$V_{DM}=67\% V_{DRM(MAX)}$, $T_j=125^{\circ}\text{C}$	100	-	-	V/ μs



热特性 THERMAL CHARACTERISTIC

项 目 Parameter	符 号 Symbol	值 value	单位 Unit
结到管壳的热阻 Thermal resistance junction to case	TO-220(C)\TO-263\TO-262 DPAK\IPAK	$R_{th(j-c)}$ $R_{th(j-c)}$	1.3 max 1.8 max
结到散热片的热阻 Thermal resistance junction to heatsink	TO-220MF-K1	$R_{th(j-hs)}$	4.5 max
结到环境的热阻 Thermal resistance junction to ambient (half cycle)		$R_{th(j-a)}$	60 typ

电绝缘特性 ELECTRICAL ISOLATION


项 目 Parameter	符号 Symbol	测试条件 Tests conditions	数值 Value	单位 Unit
绝缘电压 Isolation voltage	V_{ISOL}	1 minute, leads to mounting tab TO-220MF-K1	2000	V

特征曲线 ELECTRICAL CHARACTERISTICS (curves)

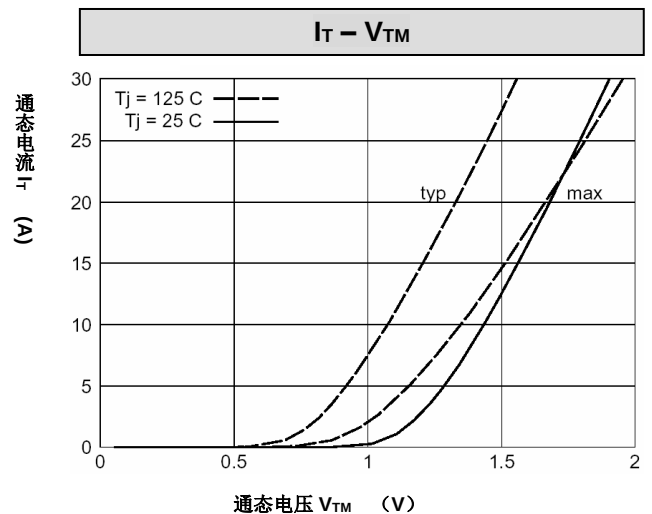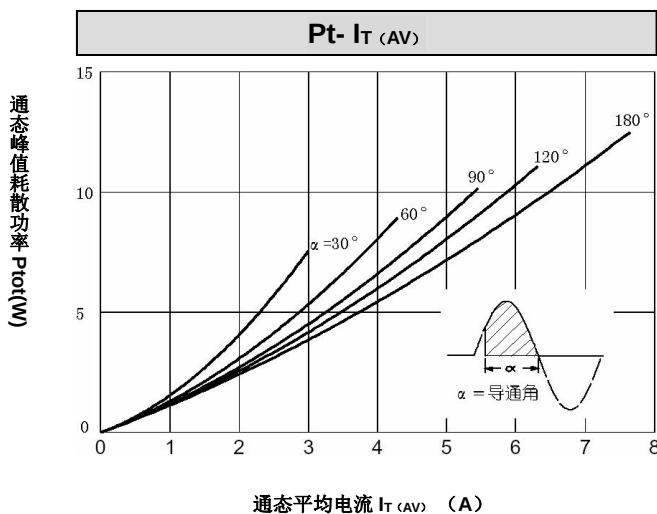

**外形尺寸 PACKAGE MECHANICAL DATA**
TO-220C


单位 Unit : mm

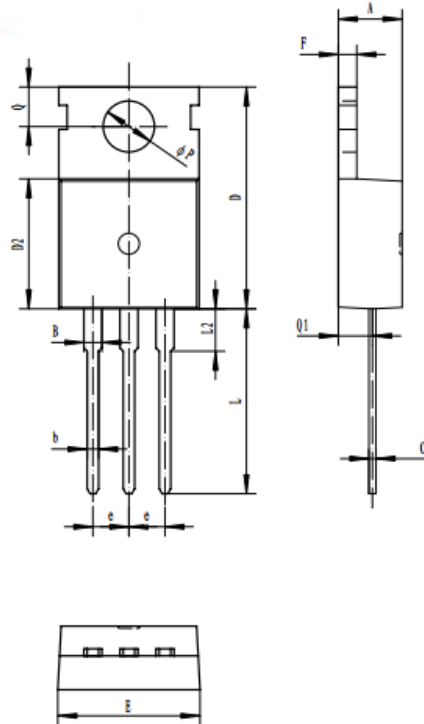

A	4.30-4.70
B	1.22-1.40
b	0.70-0.95
c	0.40-0.65
D	15.2-16.2
D2	9.00-9.40
E	9.70-10.10
e	2.39-2.69
F	1.25-1.40
L	12.60-13.60
L2	2.80-3.20
Q	2.60-3.00
Q1	2.20-2.60
P	3.50-3.80

TO-220

单位 Unit : mm


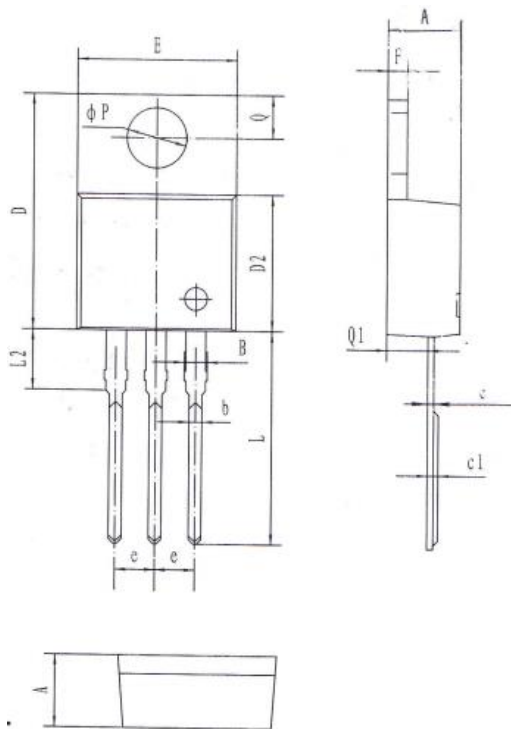


A	4.40-4.80
B	1.10-1.40
b	0.70-0.95
c	0.28-0.48
c1	0.32-0.52
D	14.45-16.00
D2	8.20-9.20
E	9.60-10.40
e	2.39-2.69
F	1.20-1.35
L	13.05-14.05
L2	3.70-3.90
Q	2.40-3.00
Q1	2.20-2.90
P	3.50-4.00



DPAK



单位 Unit : mm

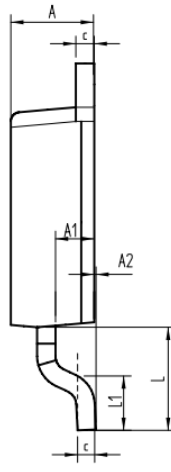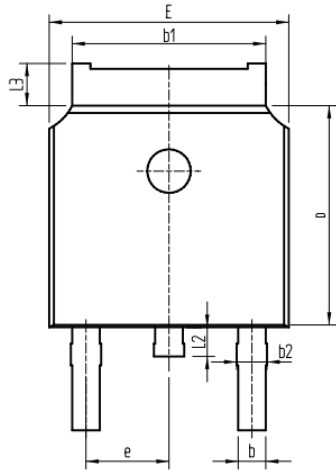

A	2.16-2.41
A1	0.97-1.17
A2	0.00-0.15
b	0.63-0.93
b1	5.13-5.53
b2	0.66-0.96
c	0.40-0.60
D	5.80-6.40
E	6.30-6.90
e	2.286 BSC
L	2.50-3.30
L1	1.20-1.80
L2	0.60-1.00
L3	0.85-1.30

TO-220MF-K1

单位 Unit : mm

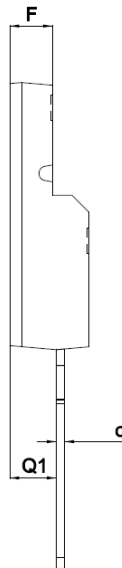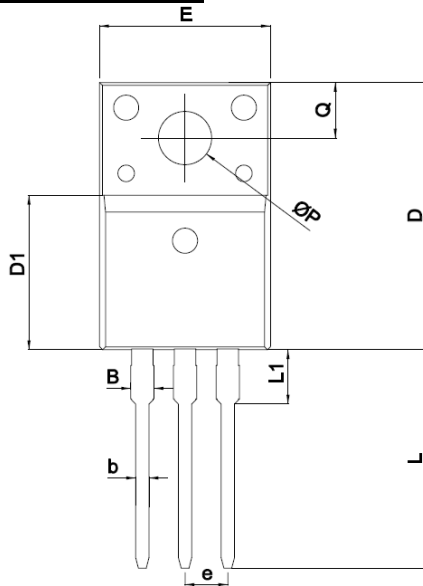


SYMBOL	mm	
	MIN	MAX
A	4.5	4.9
B	1.22	1.47
b	0.7	0.9
c	0.45	0.60
D	15.6	16.1
D1	9.0	9.3
e	2.54TYPE	
E	9.9	10.4
F	2.3	2.8
L	12.6	13.3
L1	3.1	3.4
Q	3.2	3.4
Q1	2.6	2.9
ΦP	3.0	3.5



TO-263

单位 Unit : mm

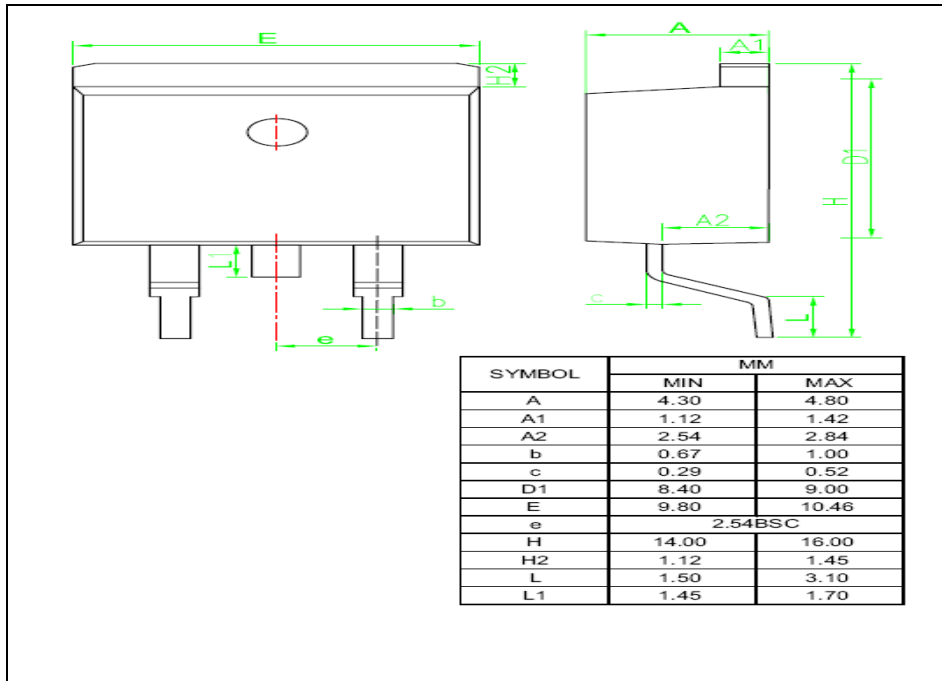



注意事项

- 1.吉林华微电子股份有限公司的产品销售分为直销和销售代理，无论哪种方式，订货时请与公司核实。
- 2.购买时请认清公司商标，如有疑问请与公司本部联系。
- 3.在电路设计时请不要超过器件的绝对最大额定值，否则会影响整机的可靠性。
- 4.本说明书如有版本变更不另外告知

联系方式

吉林华微电子股份有限公司

公司地址：吉林省吉林市深圳街 99 号

邮编：132013
总机：86-432-64678411
传真：86-432-64665812
网址：www.hwdz.com.cn

市场营销部

地址：吉林省吉林市深圳街 99 号

邮编：132013
电话： 86-432-64675588
64675688
64678411
传真： 86-432-64671533

NOTE

- 1. Jilin Sino-microelectronics co., Ltd sales its product either through direct sales or sales agent, thus, for customers, when ordering , please check with our company.
- 2. We strongly recommend customers check carefully on the trademark when buying our product, if there is any question, please don't be hesitate to contact us.
- 3. Please do not exceed the absolute maximum ratings of the device when circuit designing.
- 4. Jilin Sino-microelectronics co., Ltd reserves the right to make changes in this specification sheet and is subject to change

CONTACT

JILIN SINO-MICROELECTRONICS CO., LTD.

ADD: No.99 Shenzhen Street, Jilin City, Jilin Province, China.
Post Code: 132013
Tel: 86-432-64678411
Fax: 86-432-64665812
Web Site: www.hwdz.com.cn

MARKET DEPARTMENT

ADD: No.99 Shenzhen Street, Jilin City, Jilin Province, China.
Post Code: 132013
Tel: 86-432-64675588
64675688
64678411
Fax: 86-432-64671533

