



Spec. No.	PS-ND-0711
Rev.	A

PRODUCT SPECIFICATION

Model No : CSS-1014V9/1015V9

Descriptions:

- 1.0 Inch Single Digit Display
- Emitting Color : Super Bright Orange



CUSTOMER APPROVED	APPROVED BY	CHECKED BY	PREPARED BY
SIGNATURES			陳新強

CHINA SEMICONDUCTOR CORPORATION
Address: 2FL. NO.909, Chung-Cheng Road,
Chung-Ho City Taipei Hsien, Taiwan.

Tel: 886-2-2223-9696
Fax: 886-2-2223-9377

OPTO PLUS TECHNOLOGIES CO., LTD
Address: 696 Shun jiang Rd., Ji Shan St. Shaoxing,
ZheJiang, China

Tel: 86-0575-8623888
Fax: 86-0575-8623112

<http://www.csctw.com.tw>






Spec. No.	PS-ND-0711
Rev.	A

Model No : CSS-1014V9/1015V9
Features -

1. 1.0 inch (25.4mm) digit height.
2. Case mold type.
3. RoHs compliant.
4. Low power consumption.
5. ESD>1KV(HBM)
6. Easy mounting on P.C. board or socket.

Device Selection Guide -


Part No.	Chip		Description
	Material	Emitted Color	
CSS-1014V9	AlGaInP	Super Bright Orange	Common Anode
CSS-1015V9	AlGaInP	Super Bright Orange	Common Cathode

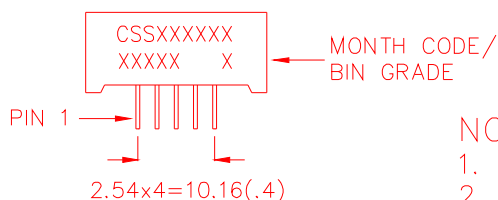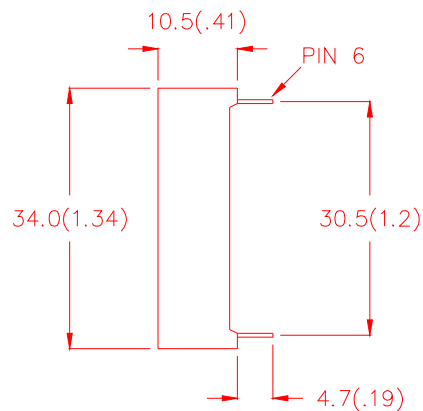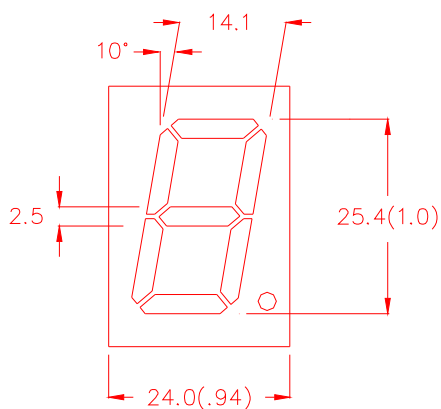Mechanical Dimensions -

NOTE:

1. All pins are $\phi 0.5(.02)$.
2. Dimension in millimeter (inch), and tolerance is $\pm 0.25 (.01)$ unless otherwise noted.

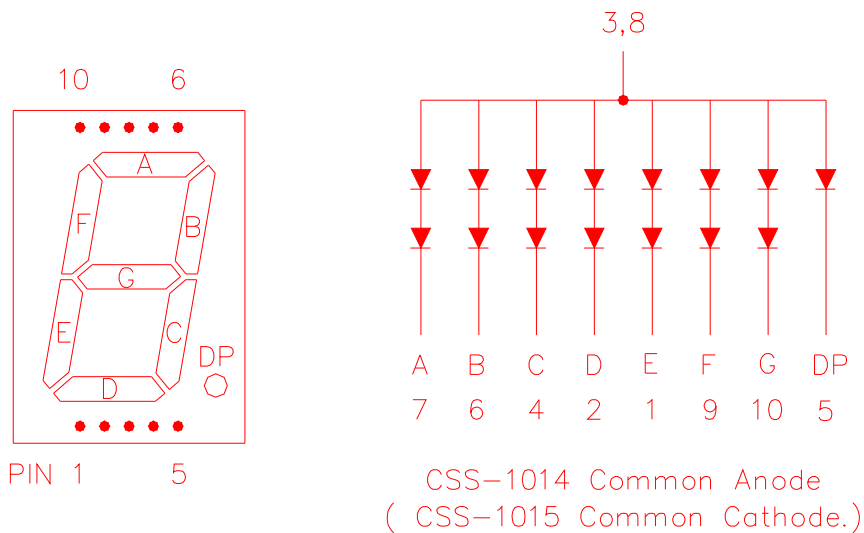

Spec. No.	PS-ND-0711
Rev.	A

Model No : CSS-1014V9/1015V9
Internal Circuit Diagrams -

Absolute Maximum Rating -

(Ta=25°C)

Parameter	Symbol	Rating	Unit
Power Dissipation Per Dice	Pd	75	mW
Continuous Forward Current Per Dice	IAF	25	mA
Peak Current Per Dice	IPF	90	mA
Derating Linear From 25°C Per Dice	-	0.33	mA/°C
Reverse Voltage Per Dice	VR	5	V
Operating Temp.	Topr	-35 ~ +85	°C
Storage Temp.	Tstg	-35 ~ +85	°C
Solder temperature 1/16 inch below seating plane for 3 seconds at 260°C			



Spec. No.	PS-ND-0711
Rev.	A

Model No : CSS-1014V9/1015V9
■ Electro-optical Characteristics -

(Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Forward Voltage Per Segment (DP)	V_F	-	4.2(2.1)	5.6(2.8)	V	$I_F=20\text{mA}$
Luminous Intensity Per Segment	I_v	-	40	-	mcd	$I_F=20\text{mA}$
Peak Emission Wavelength	λ_p	-	632	-	nm	$I_F=20\text{mA}$
Dominant Wavelength	λ_d	-	624	-	nm	$I_F=20\text{mA}$
Spectrum Radiation Bandwidth	$\Delta \lambda$	-	20	-	nm	$I_F=20\text{mA}$
Reverse Current	I_R	-	-	100	μA	$V_R=10\text{V}$
Luminous Intensity Matching Ratio	I_{V-m}	-	-	2:1	-	$I_F=10\text{mA}$

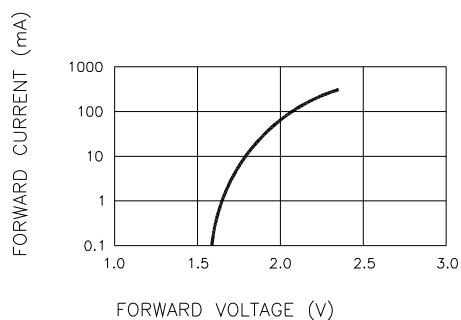

Model No : CSS-1014V9/1015V9
Typical Electrical / Optical Characteristics Curves -
(Ta = 25°C Unless Otherwise Noted)


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE






Fig.2 RELATIVE INTENSITY
VS. FORWARD CURRENTFig.3 FORWARD VOLTAGE
VS. TEMPERATUREFig.4 RELATIVE INTENSITY
VS. TEMPERATURE

Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

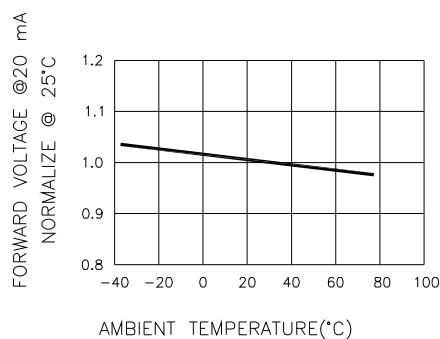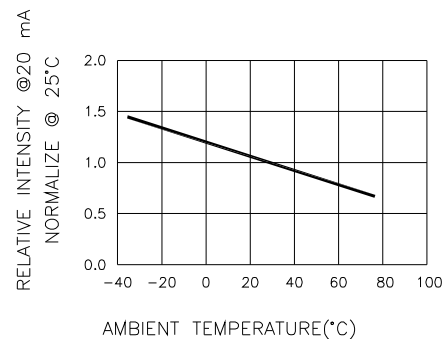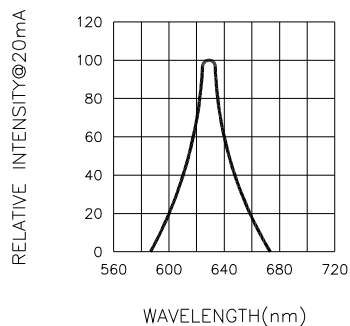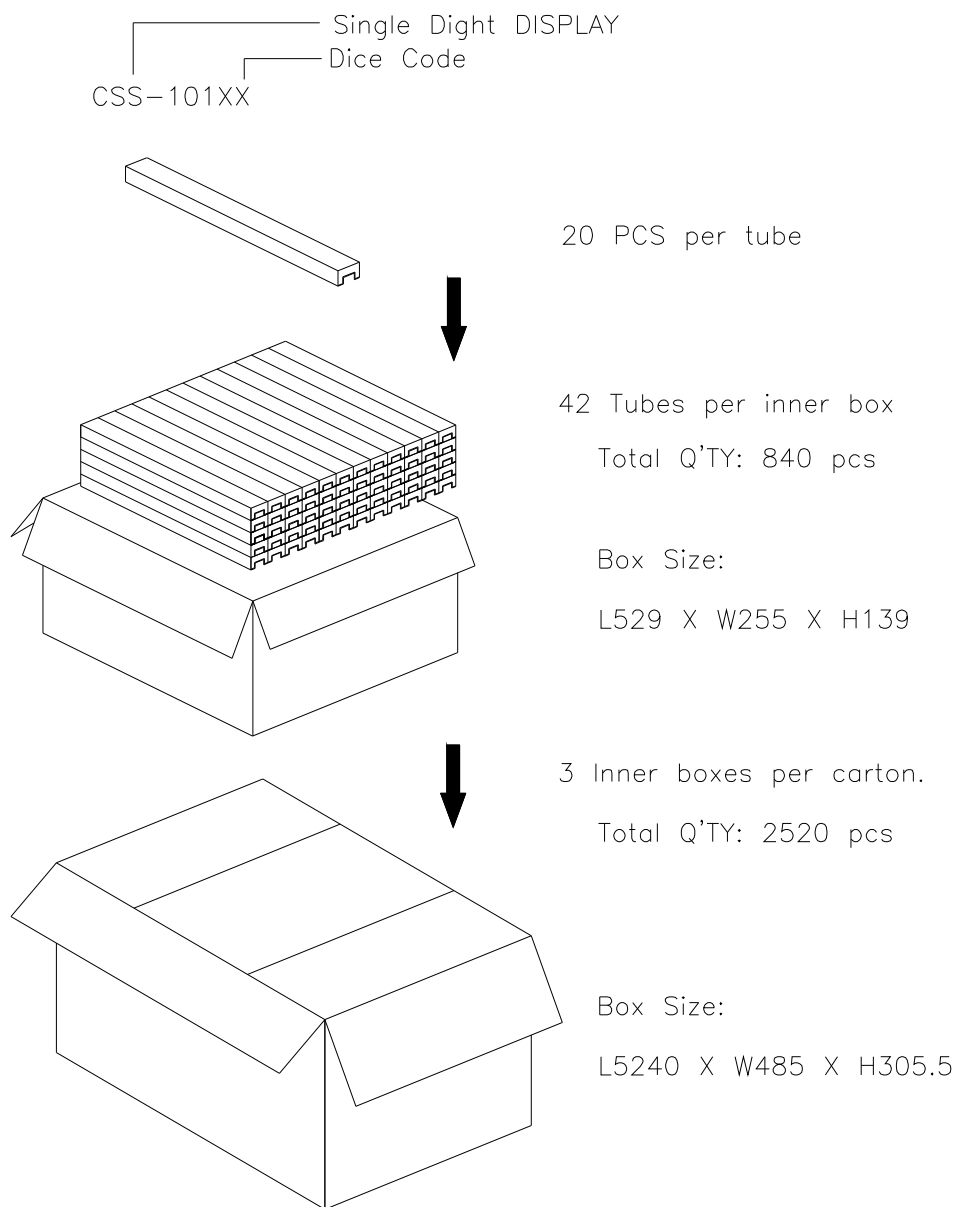

Spec. No.	PS-ND-0711
Rev.	A

Model No : CSS-1014V9/1015V9**■ Package Dimensions**

Note: The specifications are subject to change without notice. Please contact us for updated informati
<http://www.csctw.com.tw>

