

# SMD Ultra Fast Recovery Rectifiers




SMD Diodes Specialist

## CURB201-G Thru. CURB207-G

Reverse Voltage: 50 to 1000 Volts

Forward Current: 2.0 Amp

RoHS Device




### Features

- Ideal for surface mount applications.
- Easy pick and place.
- Plastic package has Underwriters Lab. flammability classification 94V-0.
- Fast recovery time: 50~75nS.
- Low leakage current.

### Mechanical data

- Case: JEDEC DO-214AA, molded plastic.
- Terminals: solderable per MIL-STD-750, method 2026.
- Polarity: Color band denotes cathode end.
- Approx. weight: 0.093 grams

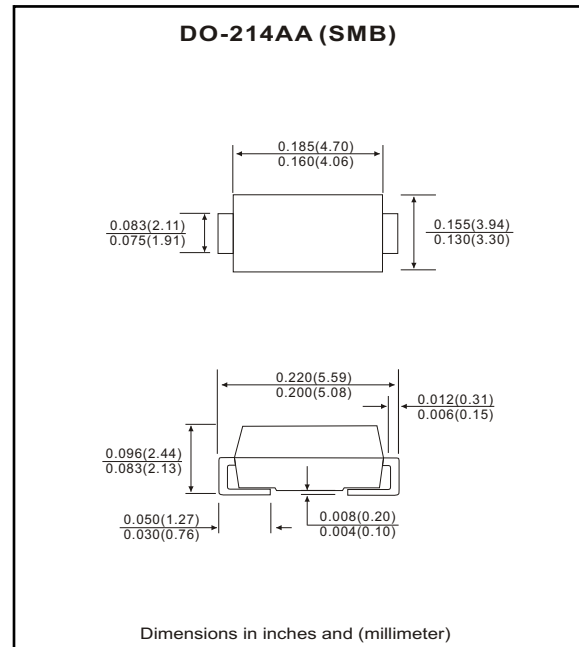

### Maximum Ratings and Electrical Characteristics

| Parameter                                                                                              | Symbol           | CURB<br>201-G | CURB<br>202-G | CURB<br>203-G | CURB<br>204-G | CURB<br>205-G | CURB<br>206-G | CURB<br>207-G | Units |
|--------------------------------------------------------------------------------------------------------|------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|-------|
| Max. repetitive peak reverse voltage                                                                   | V <sub>RRM</sub> | 50            | 100           | 200           | 400           | 600           | 800           | 1000          | V     |
| Max. DC blocking voltage                                                                               | V <sub>DC</sub>  | 50            | 100           | 200           | 400           | 600           | 800           | 1000          | V     |
| Max. RMS voltage                                                                                       | V <sub>RMS</sub> | 35            | 70            | 140           | 280           | 420           | 560           | 700           | V     |
| Peak surge forward current, 8.3ms<br>single half sine-wave superimposed<br>on rate load (JEDEC method) | I <sub>FSM</sub> | 50            |               |               |               |               |               |               | A     |
| Max. average forward current                                                                           | I <sub>O</sub>   | 2.0           |               |               |               |               |               |               | A     |
| Max. instantaneous forward voltage at<br>2.0A                                                          | V <sub>F</sub>   | 1.0           |               |               | 1.3           | 1.7           |               |               | V     |
| Reverse recovery time                                                                                  | T <sub>rr</sub>  | 50            |               |               |               | 75            |               |               | nS    |
| Max. DC reverse current at T <sub>A</sub> =25°C<br>rated DC blocking voltage T <sub>A</sub> =125°C     | I <sub>R</sub>   | 5.0<br>100    |               |               |               |               |               |               | μA    |
| Max. thermal resistance (Note 1)                                                                       | R <sub>θJL</sub> | 20            |               |               |               |               |               |               | °C/W  |
| Max. operating junction temperature                                                                    | T <sub>J</sub>   | 150           |               |               |               |               |               |               | °C    |
| Storage temperature                                                                                    | T <sub>STG</sub> | -55 to +150   |               |               |               |               |               |               | °C    |

Notes: 1. Thermal resistance from junction to lead mounted on P.C.B. with 8.0×8.0 mm<sup>2</sup> square (0.13mm thick) land area.

REV:A

# SMD Ultra Fast Recovery Rectifiers



SMD Diodes Specialist

## RATING AND CHARACTERISTIC CURVES (CURB201-G thru CURB207-G)

Fig.1 Reverse Characteristics

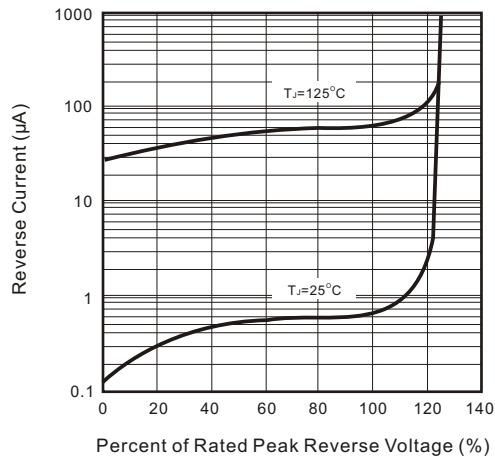


Fig.2 Forward Characteristics

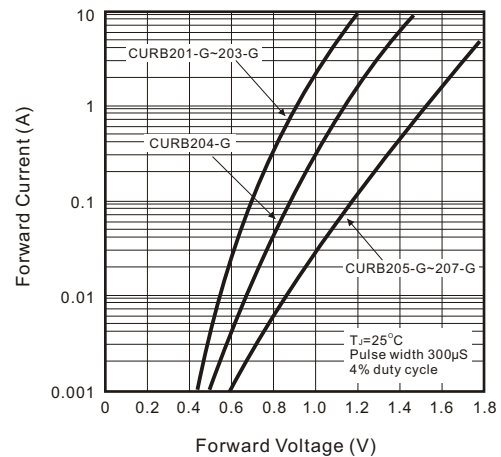


Fig.3 Junction Capacitance

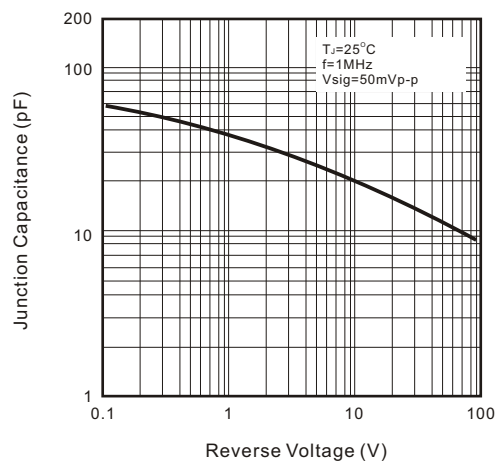


Fig.4 Non-repetitive Forward Surge Current

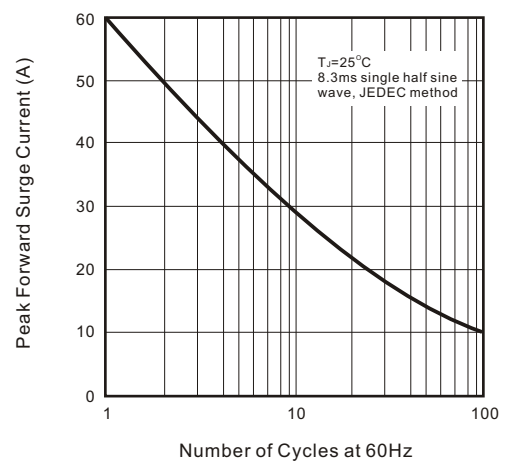


Fig.5 Test Circuit Diagram and Reverse Recovery Time Characteristics


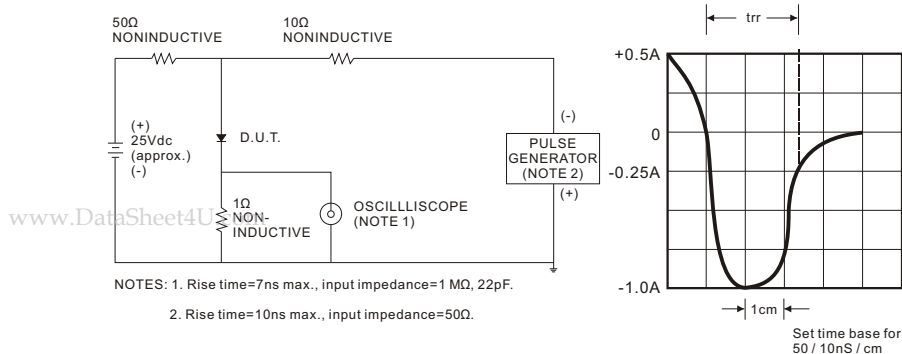


Fig.6 Current Derating Curve

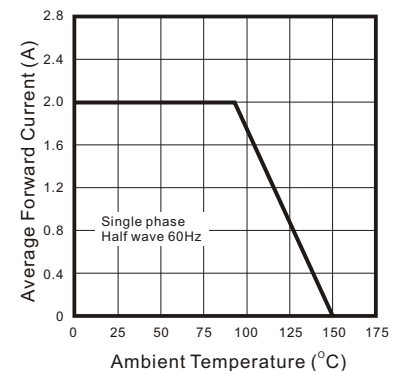

REV:A