
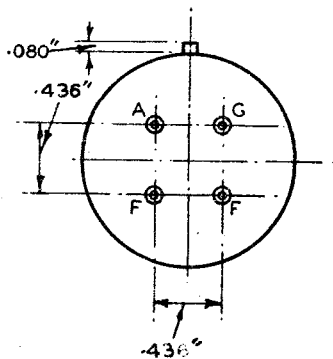


To be performed in addition to those applicable in K1001



	TEST CONDITIONS			TEST	LIMITS		No. Tested	Note
	If(A)	Va	Vg		Min.	Max.		
(a)	0.82	-	-	Vf (V)	4.1	4.8	100%	
(b)	0.82	40	40	Ie (mA)	40.0	-	100%	
(c)	0.82	150	-5	Ia (mA)	7.8	14.4	100%	
(d)	0.82	150	-5	gm (mA/V)	1.29	2.15	100%	
(e)	0.82	150	-5	Reverse Ig (μA)	-	0.5	100%	
(f)	0.82	150	-5	μ	8.4	10.6	1%	

OUTLINE DRAWING

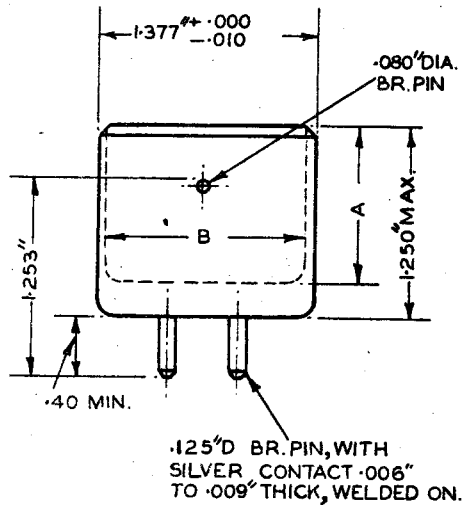

INTERNAL DIMENSIONS A & B
TO SUIT MANUFACTURERS
REQUIREMENTS.

FIG. 1. MOULDED TYPE.

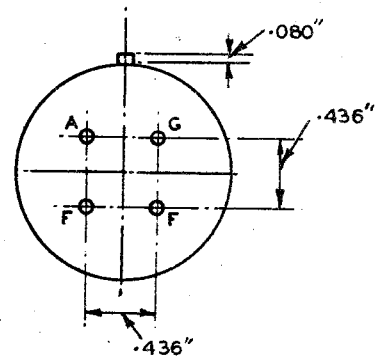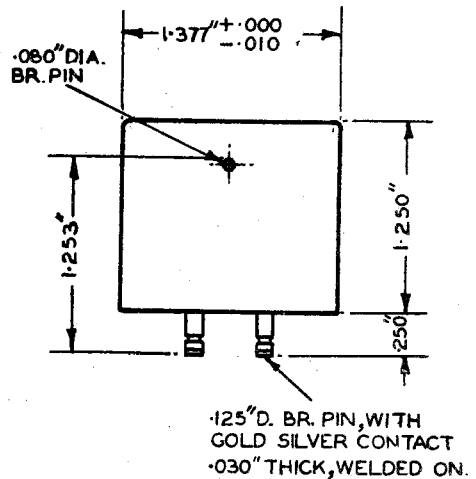

MATERIAL:— NI. P. BRASS CYLINDER
WITH MOULDED INTERIOR.

FIG. 2. METAL SHELL TYPE.