

ABRIDGED DATA SHEET

19-4750; Rev 0; 7/09
www.DataSheet4U.com



DS34S132 32-Port TDM-over-Packet IC


General Description

The IETF PWE3 SAToP/CESoPSN/HDLC-compliant DS34S132 provides the interworking functions that are required for translating TDM data streams into and out of TDM-over-Packet (TDMoP) data streams for L2TPv3/IP, UDP/IP, MPLS (MFA-8), and Metro Ethernet (MEF-8) networks while meeting the jitter and wander timing performance that is required by the public network (ITU G.823, G.824, and G.8261). Up to 32 TDM ports can be translated into as many as 256 individually configurable pseudowires (PWs) for transmission over a 100/1000Mbps Ethernet port. Each TDM port's bit rate can vary from 64Kbps to 2.048Mbps to support T1/E1 or slower TDM rates. PW interworking for TDM-based serial HDLC data is also supported. A built-in time-slot assignment (TSA) circuit provides the ability to combine any group of time slots (TS) from a single TDM port into a single PW. The high level of integration provides the perfect solution for high-density applications to minimize cost, board space, and time to market.

Applications

TDM Circuit Emulation Over PSN
TDM Leased-Line Services Over PSN
TDM Over BPON/GPON/EPON
TDM Over Cable
TDM Over Wireless
Cellular Backhaul
Multiservice Over Unified PSN
HDLC-Encapsulated Data Over PSN

Functional Diagram

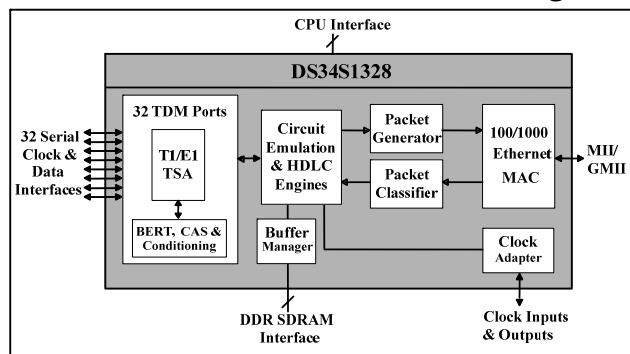

Features

- ◆ 32 Independent TDM Ports with Serial Data, Clock, and Sync (Data = 64Kbps to 2.048Mbps)
- ◆ One 100/1000Mbps (MII/GMII) Ethernet MAC
- ◆ 256 Total PWs, 32 PW per TDM Port, with Any Combination of TDMoP and/or HDLC PWs
- ◆ PSN Protocols: L2TPv3 or UDP Over IP (IPv4 or IPv6), Metro Ethernet (MEF-8), or MPLS (MFA-8)
- ◆ 0, 1, or 2 VLAN Tags (IEEE 802.1Q)
- ◆ Synchronous or Asynchronous TDM Port Timing
 - One Clock Recovery Engine per TDM Port with One Assignable as a Global Reference
 - Supported Clock Recovery Techniques
 - Adaptive Clock Recovery
 - Differential Clock Recovery
 - Absolute and Differential Timestamps
 - Independent Receive and Transmit Interfaces
 - Two Clock Inputs for Direct Transmit Timing
- ◆ For Structured T1/E1, Each TDM Port Includes DS0 TSA Block for any Time Slot to Any PW 32 HDLC/CES Engines (256 Total) With or Without CAS Signaling
- ◆ For Unstructured, each TDM Port Includes One HDLC/SAT Engine (32 Total) Any data rate from 64Kbps to 2.048Mbps
- ◆ 32-Bit or 16-Bit CPU Processor Bus
- ◆ CPU-Based OAM and Signaling
 - UDP-specific "Special" Ethernet Type
 - Inband VCCV ARP
 - MEF OAM NDP/IPv6
 - Broadcast DA
- ◆ DDR SDRAM Interface
- ◆ Low-Power 1.8V Core, 3.3V I/O, 2.5V SDRAM

Ordering Information

PART	PORTS	TEMP RANGE	PIN-PACKAGE
DS34S132 GN	32	-40°C to +85°C	676 BGA
DS34S132 GN+	32	-40°C to +85°C	676 BGA

+Denotes a lead(Pb)-free/RoHS-compliant package.



Maxim Integrated Products 1

Some revisions of this device may incorporate deviations from published specifications known as errata. Multiple revisions of any device may be simultaneously available through various sales channels. For information about device errata, go to: www.maxim-ic.com/errata. For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

www.DataSheet4U.com

1 INTRODUCTION

The public network is in transition from a TDM Switched Network to a Packet Switched Network. A number of Pseudowire (PW) packet protocols have been standardized to enable legacy TDM services (e.g. TDM voice, TDM Leased-line and HDLC encapsulated data) to be transported and switched/routed over a single, unified PSN. The legacy service is encapsulated into a PW protocol and then transported or tunneled through the unified PSN. The PW protocols provide the addressing mechanisms that enable a PSN to switch/route the service without understanding or directly regarding the specific characteristics of the services (e.g. the PSN does not have to directly understand the timing requirements of a TDM voice service). The PW protocols have been developed for use over PSNs that utilize the L2TPv3/IP, UDP/IP, MPLS (MFA-8) or Metro Ethernet (MEF-8) protocols.

PW protocols that are used for TDM services can be categorized as TDM-over-Packet (TDMoP) PW protocols. The TDMoP protocols support all of the aspects of the TDM services (data, timing, signaling and OAM). This enables Public (WAN) and Enterprise (LAN) networks to migrate to next generation PSNs and continue supporting legacy voice and leased-line services without replacing the legacy termination equipment.

Legacy TDM services depend on constant bit rate data streams with highly accurate frequency, jitter and wander timing requirements that up until recently have not been well supported by most packet switching equipment. For public network applications the timing recovery mechanisms must achieve the jitter and wander performance that is required by the ITU-T G.823/824/8261 standards. To accomplish this, a TDMoP terminating device must incorporate innovative and complex mechanisms to recovery the TDM timing from a stream of packets.

Legacy TDM services also have numerous special features that include voice signaling and OAM systems that have been developed over many years through a long list of standardization literature to provide carrier-grade reliability and maintainability. The list of legacy functions and features is so long that today's VoIP equipment only supports a subset of what is used in the legacy TDM network. This, in part, has slowed the transition from a TDM to Packet-based network. With TDMoP technology all features and services can be supported.

The TDMoP technology is similar to VoIP technology in that both provide a means of communicating a time oriented service (e.g. voice) over a non-time oriented, packet network. TDMoP technology can be added incrementally to the network (as needed) to supplement VoIP technology to provide an alternative solution when VoIP price/performance is not optimal (e.g. where the number of supported lines does not warrant the infrastructure required of a VoIP network) and where some function/features are not supported by the VoIP protocols.

The Legacy PSTN network also supports HDLC encapsulated data that is transported over TDM lines. PWs can also be used to transport HDLC data. This form of PW could also be categorized as a TDM service since the legacy service is carried over TDM lines. However, the fundamental aspects of an HDLC service do not depend as much on TDM timing and the nature of the data can be described as "packetized" as with Ethernet, Frame Relay and ATM services. For clarity the HDLC service is categorized as "HDLC over PW". One example Legacy HDLC service is SS7 Signaling which is used to communicate voice signaling information from one TDM switch to another.

2 ACRONYMS AND GLOSSARY

- # – Number
- ACR – Adaptive Clock Recovery
- AT – Absolute Timestamps
- ATM – Asynchronous Transfer Mode
- BERT – Bit Error Rate Test
- BGA – Ball Grid Array
- BITS - Building Integrated Timing System
- Bundle – a PW with an ID that is recognized by the DS34S132
- BW – Bandwidth
- CR – Clock Recovery
- CAS – Channel Associated Signaling
- CCS – Common Channel Signaling
- CES – abbreviation for CESoPSN
- CESoPSN – Circuit Emulation Service over PSN
- CLAD – Clock Rate Adapter
- CRE – Clock Recovery Engine
- DA – Destination Address
- DCR – Differential Clock Recovery
- DCR-DT – DCR with Differential Timestamps
- DDR – Double Data Rate
- Decap –De-encapsulate
- DS0 – 64 Kb/s Timeslot within a T1 or E1 signal
- DS1 – 1.544 Mb/s TDM data stream
- E1 – 2.048 Mb/s TDM data stream
- Encap –Encapsulate
- EPON – Ethernet PON (IEEE 802.3ah)
- FCS – Frame Check Sequence
- GMII – Gigabit MII (IEEE 802.3)
- GPON – Gigabit PON (ITU-T G.984)
- GPS - Global Positioning System
- HDLC – High-level Data Link Control
- IEEE – Institute of Electrical & Electronic Engineers
- IETF – Internet Engineering Task Force
- IP – Internet Protocol
- ISDN – Integrated Services Digital Network
- ITU – International Telecommunication Union
- JB – Jitter Buffer
- L2TPv3 – Layer 2 Tunneling Protocol Version 3
- LAN – Local Area Network
- MAC – Media Access Control
- MAN – Metropolitan Area Network
- MEF – Metro Ethernet Forum
- MFA – MPLS/Frame Relay Alliance (Now called IP/MPLS Forum)
- MII – Medium Independent Interface (IEEE 802.3)
- MPLS – Multi-Protocol Label Switching
- OAM – Operations, Administration & Maintenance
- OCXO – Oven Controlled Crystal Oscillator
- OLT – Optical Line Termination
- ONU – Optical Network Unit
- PBX – Private Branch Exchange
- PDV – Packet Delay Variation
- PDVT – PDV Tolerance
- PON – Passive Optical Network
- PRBS – Pseudo-Random Bit Sequence
- PSN – Packet Switched Network
- PSTN – Public Switched Telephone Network
- PWE3 – Pseudo-Wire Edge-to-Edge Emulation
- PW – Pseudo Wire
- QoS – Quality of Service
- QRBS – Quasi-Random Bit Sequence
- RAM – Random Access Memory
- Rcv – Receive
- RXP – Receive Packet direction “from Ethernet Port to TDM Port”
- SAT – abbreviation for SAToP
- SAToP – Structure-Agnostic TDM over Packet
- SDH – Synchronous Digital Hierarchy
- SDRAM – Synchronous Dynamic RAM
- SN – Sequence Number
- SONET –Synchronous Optical Network
- SS7 – Signaling System 7
- T1 – commonly used term for DS1
- T1-ESF – T1 Extended Super-frame
- T1-SF – T1 Super-frame
- T1/E1 – T1 or E1
- TCXO – Temperature Compensated Crystal Oscillator
- TDM – Time Division Multiplexing
- TDMoIP – TDM over IP
- TDMoP – TDM over Packet
- Timeslot – 64 Kb/s channel within an E1 or T1
- TS – Timeslot
- TXP – Transmit Packet direction “from TDM Port to Ethernet Port”
- UDP – User Datagram Protocol
- VCCV – Virtual Circuit Connectivity Verification
- VoIP – Voice over IP
- WAN – Wide Area Network
- Xmt - Transmit

ABRIDGED DATA SHEET

3 APPLICABLE STANDARDS

Table 3-1. Applicable Standards

SPECIFICATION	SPECIFICATION TITLE
ANSI	
T1.102	<i>Digital Hierarchy—Electrical Interfaces</i> , 1993
T1.107	<i>Digital Hierarchy—Formats Specification</i> , 1995
T1.403	<i>Network and Customer Installation Interfaces—DS1 Electrical Interface</i> , 1999
ETSI	
ETS 300 011	<i>ISDN Primary Rate User Network Interface (UNI); Part 1: Layer 1 Spec. V1.2.2</i> (2000-05)
IEEE	
IEEE 802.1Q	<i>Virtual Bridged Local Area Networks</i> (2003)
IEEE 802.3	<i>Carrier Sense Multiple Access with Collision Detection Access Method and Physical Layer Spec.</i> (2005)
IEEE 1149.1	<i>Standard Test Access Port and Boundary-Scan Architecture</i> , 1990
IETF	
RFC 4553	<i>Structure-Agnostic Time Division Multiplexing (TDM) over Packet (SAToP)</i> (06/2006)
RFC 4618	<i>Encapsulation Methods for Transport of PPP/High-Level Data Link Control (HDLC) over MPLS Networks</i> (09/2006)
RFC 5086	<i>Structure-Aware Time Division Multiplexed (TDM) Circuit Emulation Service over Packet Switched Network (CESoPSN)</i> (12/2007)
RFC 5087	<i>Time Division Multiplexing over IP (TDMoIP)</i> (12/2007)
ITU-T	
G.704	<i>Synchronous Frame Structures at 1544, 6312, 2048, 8448 and 44736 kbit/s Levels</i> (10/1998)
G.732	<i>Characteristics of Primary PCM Multiplex Equipment Operating at 2048Kbit/s</i> (11/1988)
G.736	<i>Characteristics of Synchronous Digital Multiplex Equipment Operating at 2048Kbit/s</i> (03/1993)
G.823	<i>The Control of Jitter and Wander in Digital Networks Based on 2048kbps Hierarchy</i> (03/2000)
G.824	<i>The Control of Jitter and Wander in Digital Networks Based on 1544kbps Hierarchy</i> (03/2000)
G.8261/Y.1361	<i>Timing and Synchronization Aspects in Packet Networks</i> (05/2006)
G.8261/Y.1361	<i>Timing and Synchronization Aspects in Packet Networks</i> (12/2006). Corrigendum 1.
I.431	<i>Primary Rate User-Network Interface - Layer 1 Specification</i> (03/1993)
O.151	<i>Error Performance Measuring Equipment Operating at the Primary Rate and Above</i> (1992)
Y.1413	<i>TDM-MPLS Network Interworking – User Plane Interworking</i> (03/2004)
Y.1413	<i>TDM-MPLS Network Interworking – User Plane Interworking</i> (10/2005). Corrigendum 1.
Y.1414	<i>Voice Services–MPLS Network Interworking</i> (07/2004)
Y.1453	<i>TDM-IP Interworking – User Plane Networking</i> (03/2006)
MEF	
MEF 8	<i>Implementation Agree. for Emulation of PDH Circuits over Metro Ethernet Networks</i> (10/2004)
MFA	
MFA 8.0.0	<i>Emulation of TDM Circuits over MPLS Using Raw Encapsulation – Implement. Agree.</i> (11/2004)

Note: Only those sections of these standards that are affected by the DS34S132 functions are considered applicable. For example, several of the standards specify T1/E1 Framing/LIU functions (e.g. pulse shape) that are not included in the DS34S132 but also specify jitter/wander functions that are applicable.

4 HIGH LEVEL DESCRIPTION

To implement a PW (tunnel) across a PSN requires a PW termination point at each end of the PW (tunnel). Each terminating point provides the PW encapsulation functions that are required to enter the PSN (for one direction of data) and the PW de-encapsulation functions to restore the data to its original (non-PW) format (for the opposite direction). The two data directions at each termination point can be described as the “transmit PW packet direction” (TXP) and the “receive PW packet direction” (RXP).

The DS34S132 TDMoP device implements the complete, bi-directional PW termination point encapsulation functions for TDMoP and HDLC PWs. The DS34S132 is a high density solution that can terminate up to 256 PWs that are associated with up to 32 T1/E1 data streams and aggregate that traffic for transmission over a single 100/1000 Mb/s Ethernet data stream. The DS34S132 can encap/decap TDMoP and HDLC PWs into the following PSN protocols: L2TPv3/IPv4, L2TPv3/IPv6, UDP/IPv4, UDP/IPv6, Metro Ethernet (MEF-8) and MPLS (MFA-8).

For TDMoP PWs the DS34S132 supports the SAToP and CESoPSN payload formats. SAToP is used for Unstructured TDM transport, where an entire T1/E1 including the framing pattern (if it exists) is transferred transparently as a series of unformatted bytes of data in the PW payload without regard to any bit, byte and/or frame alignment that may exist in the TDM data stream. The DS34S132 can support Unstructured T1, E1 or slower TDM data streams (any bit rate less than or equal to 2.048 Mb/s).

CESoPSN is used for Structured TDM transport where the PW packet payload is synchronized to the T1/E1 framing. With CESoPSN the T1/E1 framing pattern is commonly not passed across the PW (removed) because the structured PW format enables the framing information to be conveyed through the PW mechanisms. The opposite end generates the T1/E1 framing pattern from the PWs payload structure. This payload format can be used when the TDM service (e.g. voice) requires the ability to interpret, and/or terminate some functional aspects of the T1/E1 signal (e.g. identify DS0s within the T1/E1). PWs with the Structured payload format can support Nx64 Kb/s, fractional T1/E1 (T1: $N = 1 - 24$; E1: $N = 1 - 32$). In some applications, a T1/E1 can be divided into multiple Nx64 blocks ($M \times N \times 64$; M = the number of fractional blocks) and the PSN can be used as a “distributed cross-connect” to implement a point to multi-point topology forwarding some Nx64 blocks to one end point and other Nx64 blocks to other end points (T1: $M = 1 - 24$; E1: $M = 1 - 32$; e.g. for E1: $32 \times 1 \times 64$).

The CESoPSN Structured format can also convey CAS Signaling across a PW through the use of a sub-channel within the CESoPSN PW packets. The DS34S132 enables the CAS Signaling to be transparently passed, monitored by an external CPU, and/or terminated by an external CPU, all on a per Timeslot and per direction basis.

The DS34S132 allows each TDM Port to independently support asynchronous or synchronous TDM data streams. Each TDM Port has a Clock Recovery Engine to regenerate the timing from a TDMoP PW packet data stream. For applications that do not require clock recovery the DS34S132 also provides several external clocking options.

The Clock Recovery Engines support Differential Clock Recovery (DCR) and Adaptive Clock Recovery (ACR). DCR can be used when a common clock is available at both ends of the PW (e.g. BITS clock for the public network or GPS for the mobile cellular network) and requires that the PW use RTP Timestamps to convey the TDM timing information. Adaptive Clock Recovery does not use Timestamps but instead regenerates the timing based on the TDMoP PW packet transmission rate. The DS34S132 high performance clock recovery circuits enable the use of PWs in the public network by achieving the stringent jitter and wander performance requirements of ITU-T G.823/824/8261, even for networks that impose large packet delay variation (PDV) and packet loss. For far end clock recovery, the DS34S132 can generate two Timestamp formats - Absolute and Differential Timestamps.

PWs can be used to transport HDLC packet data. The DS34S132 can forward HDLC encapsulated data transparently using a TDMoP PW (as described above; idle HDLC Flags are forwarded with the data) or by first extracting the data from the HDLC coding and then only forwarding the non-idle data in an HDLC PW. The HDLC PW is useful for HDLC data streams where a significant portion of the data stream is filled with HDLC Idle Flags. For example, if a 64 Kb/s TDM Timeslot is used to carry 4 Kb/s of HDLC data then it may be more bandwidth efficient to extract the payload data from the HDLC encoding and forward the data over an HDLC PW. The DS34S132 incorporates 256 HDLC Engines so that any PW can be assigned as a TDMoP PW or an HDLC PW.

PW Termination points often must also terminate OAM and Signaling packet data streams. To support this need the DS34S132 enables an external CPU to terminate several OAM and Signaling types including: PW In-band VCCV OAM, PW UDP-specific (Out-band VCCV) OAM, MEF OAM, Ethernet Broadcast frames, ARP, IPv6 NDP and includes a user specified CPU-destination Ethernet Type. The DS34S132 can also be programmed to forward packets to the CPU that match specialized conditions for debug or other purposes (e.g. wrong IP DA).

ABRIDGED DATA SHEET

Maxim Integrated Products Confidential and Proprietary

DS34S132 DATA SHEET

www.DataSheet4U.com


The DS34S132 uses an external DDR SDRAM device to buffer data. The large memory supplies sufficient buffer space to support a 256 ms PDV for each of the 256 PW/Bundles and to enable packet re-ordering for packets that are received out of order (the PSN may mis-order the packets). This large memory is also used to buffer the HDLC data streams and the CPU terminated OAM and Signaling packets.

TDMoP provides the perfect transition technology for next generation packet networks enabling the continued use of the vast Legacy network and at the same time supplementing new packet based technologies.

5 APPLICATION EXAMPLES


In **Figure 5-1**, TDMoP devices are used in gateway nodes to transport TDM services through a metropolitan PSN. The Maxim TDMoP family of devices offers a range of density solutions so that lower density solutions like the DS34T101 can be used in Service Provider Edge applications, to support a small number of T1/E1 lines, and higher density solutions like the DS34S132 can be used in Central Office applications, to terminate several Service Provider Edge nodes. PWs can be carried over fiber, wireless, SONET/SDH, G/EPON, coax, etc.

Figure 5-1. TDMoP in a Metropolitan Packet Switched Network

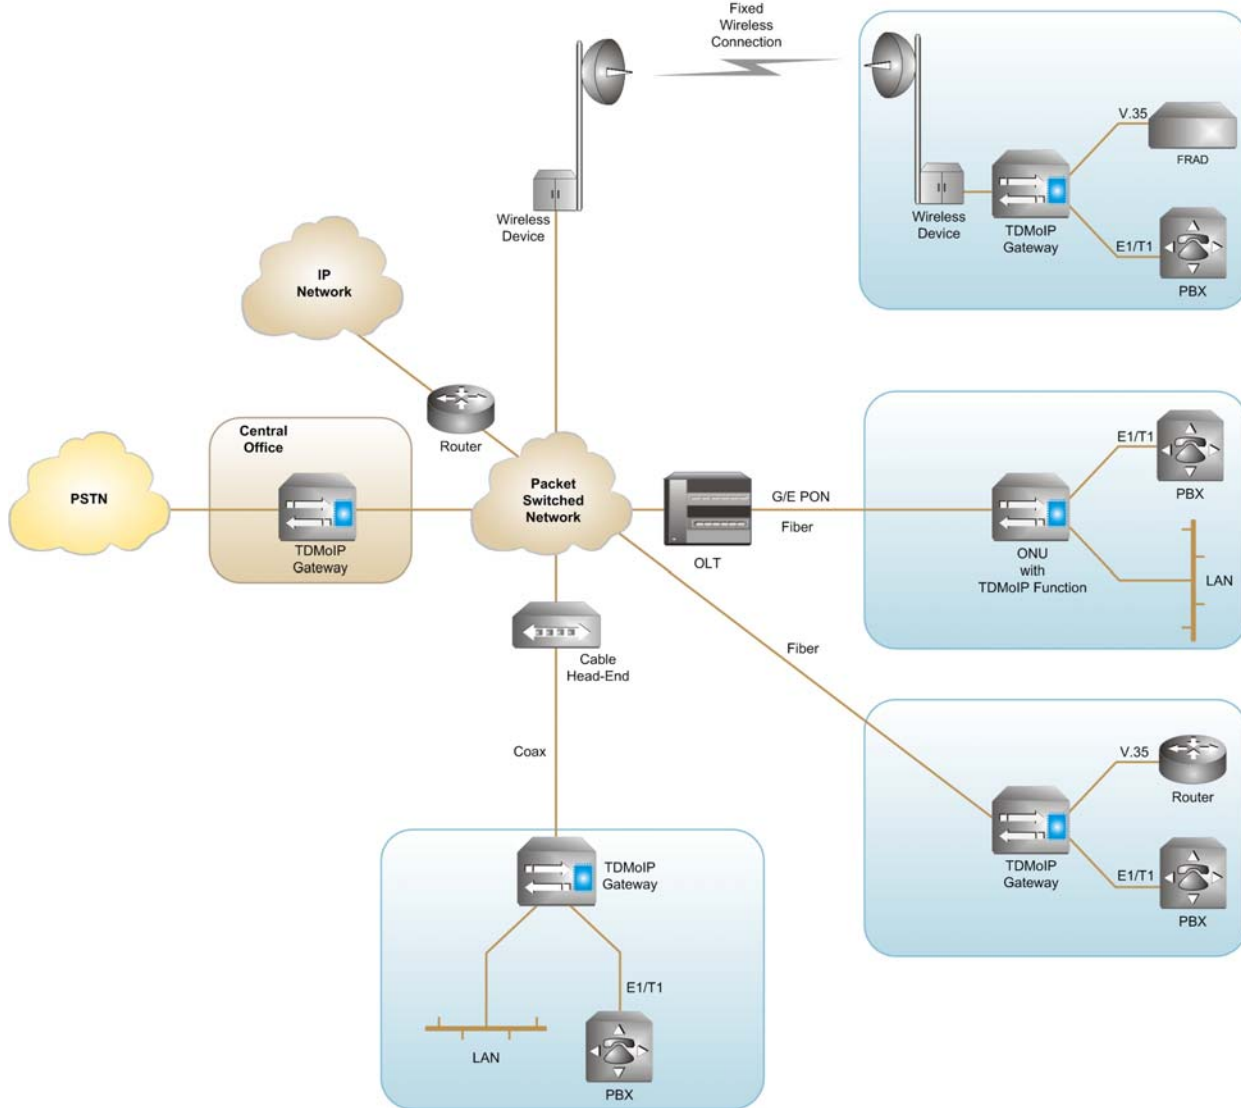

In **Figure 5-2**, DS34S132 devices are used in TDMoP gateways to enable TDM services to be transported through a Cellular Backhaul PSN.

Figure 5-2. TDMoP in Cellular Backhaul

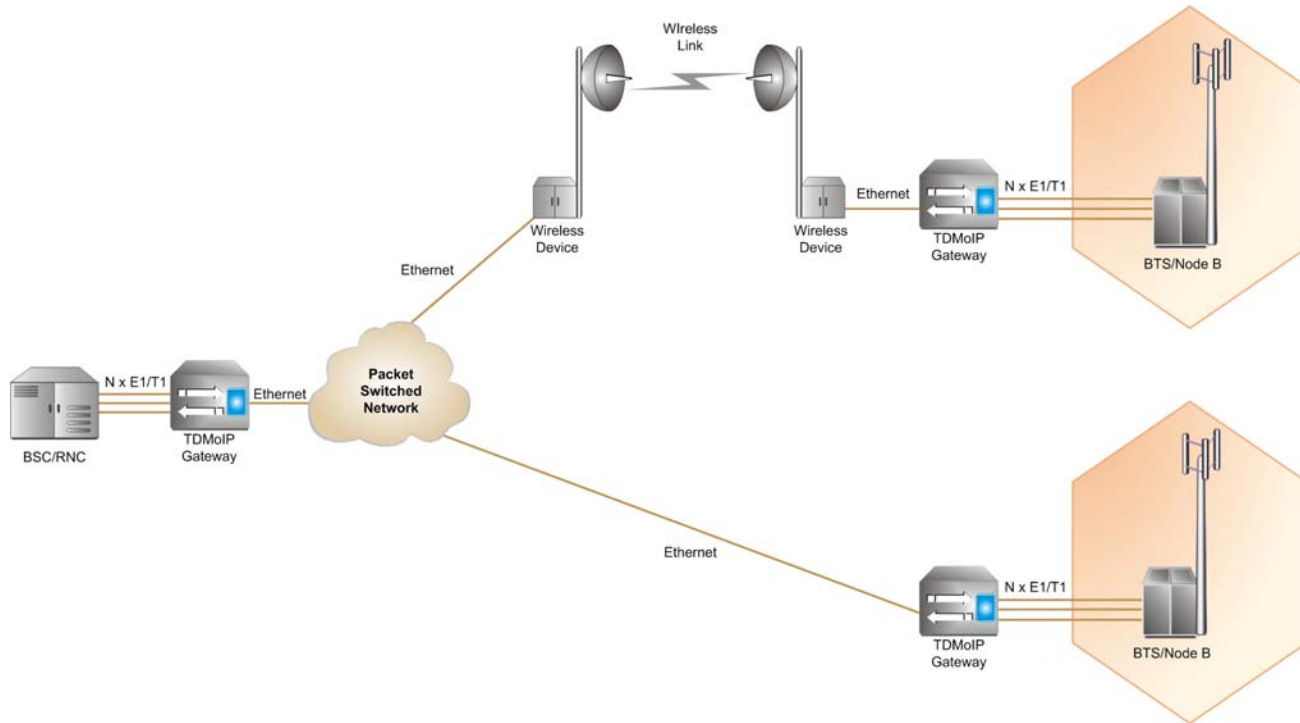


Other Possible Applications

Using a Packet Backplane for Multiservice Concentrators

Communications platforms with all/any of the above-mentioned capabilities can replace obsolete, low bandwidth TDM buses with low cost, high bandwidth Ethernet buses. The DS34S132 provides the interworking functions that are needed to packetize TDM services so that they can be multiplexed together with bursty services for transmission over a unified backplane bus. This enables a cost-effective, future-proof design with full support for both legacy and next-generation services.

6 BLOCK DIAGRAM

Figure 6-1. DS34S132 Functional Block Diagram

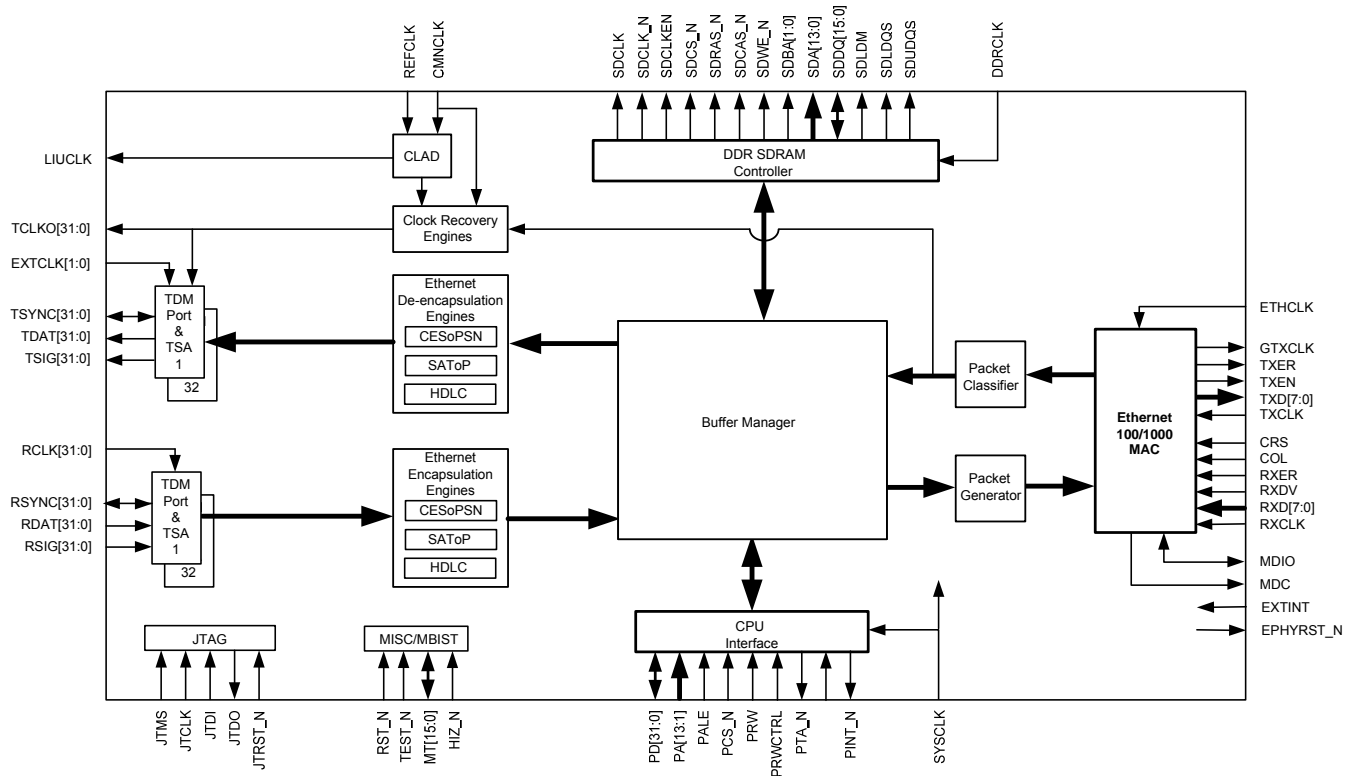

7 FEATURES

TDM Port Features

- TDM Ports
 - 32 TDM Ports, each with independently configured Framing Format
 - T1/E1 Structured (with T1/E1 Framing)
 - T1-SF, T1-ESF and E1 CAS Multi-frame formats
 - With and Without CAS Signaling
 - CAS embedded in data bus using RDAT/TDAT pins
 - Parallel CAS Interface using RSIG/TSIG pins
 - Unstructured (without Framing) - T1, E1 and slower TDM line rates (any line rate \leq 2.048 Mb/s)
- TDM Port Timing References
 - TDM Port Clocks
 - Asynchronous or Synchronous TDM Port Timing
 - Independent Receive and Transmit Clocks
 - Transmit TDM Port Timing
 - RXP packet stream Clock Recovery
 - One Clock Recovery Engine per TDM Port
 - Global Clock Recovery Engine
 - EXTCLK0 or EXTCLK1 External clock reference
 - External RCLK signal (Loop timed)
 - Receive TDM Port Timing
 - External RCLK signal
 - Internally generated Transmit timing (for synchronous systems)
 - TDM Multi-frame Synchronization for CAS Signaling
 - Independent Receive and Transmit Multi-frame Synchronization for each TDM Port
 - E1, T1-SF and T1-ESF Multi-frame Synchronization
 - External input or internally generated Multi-frame synchronization
- TDM Port Clock Recovery Engines
 - Adaptive Clock Recovery or
 - Differential Clock Recovery
 - Common Clock (CMNCLK) frequency = 1MHz to 25MHz (in 8kHz increments)
 - RTP Differential Timestamp
 - Generation of Absolute Timestamps and Differential Timestamps
 - External 5.0 MHz – 155.52 MHz clock input (REFCLK) for internal Clock Recovery synthesizer
 - Fast Frequency Acquisition and Highly Accurate Phase Tracking
 - Recovered Clock Jitter and Wander per ITU-T G.823/G.824/G.8261 with Stratum 3 clock reference
 - High resilience to Packet Loss and Robust to Sudden Significant Constant Delay Changes
 - Automatic transition to hold-over during alarm/event impairments
- TDM Port Timeslot Assignment (TSA), CAS and Conditioning
 - Nx64 Kb/s – any combination of T1/E1 Timeslots from one TDM Port can be assigned to a PW/Bundle
 - T1/E1 CAS Signaling (Channel Associated Signaling)
 - Transparent CAS (forwarded from TDM to Ethernet Port and from Ethernet to TDM Port)
 - Per Timeslot CPU Controlled CAS (CPU inserts CAS; in TXP and/or RXP directions)
 - CAS Status and Change of Status for CPU Monitoring (in RXP and TXP directions)
 - Data Conditioning – can force any 8-bit pattern on any number of Timeslots (in RXP and TXP directions)

Ethernet Port Features

- Ethernet MAC Interface
 - 100/1000 Mb/s Operation using MII/GMII Interface
 - 2 programmable receive Ethernet Destination Addresses
 - Mixed Ethernet II (DIX) and IEEE 802.2 LLC/SNAP formats
 - Mixed data streams with 0, 1, or 2 VLAN Tags
 - Programmable VLAN TPID
 - Ethernet Frame Length 64 bytes to 2000 bytes

PW/Bundle Features

- RXP PW/Bundle Header
 - Up to 256 programmed PW/Bundles (32 per TDM Port)
 - PW Header Types
 - L2TPv3 / IPv6
 - L2TPv3 / IPv4
 - UDP / IPv4
 - UDP / IPv6
 - MEF (MEF-8)
 - MPLS (MFA-8)
 - Mixed MPLS data streams with 0, 1 or 2 MPLS Outer Labels
 - Mixed L2TPv3 data streams with 0, 1, or 2 L2TPv3 Cookies
 - Flexible UDP settings
 - 16-bit (standard) or 32-bit (extended) UDP PW-ID bit width
 - 16-bit UDP PW-ID selectable to be verified against UDP Source or Destination Port
 - Optional 16-bit PW-ID Mask
 - Ignore UDP Payload Protocol or verify against 2 programmable UDP Payload Protocol Values
 - Optional PW Control Word
 - Optional “In-band VCCV” Monitoring
 - Programmable 16-bit In-band VCCV value with programmable 16-bit In-band VCCV mask
 - Optional RTP Header
 - One PW/Bundle per TDM Port can be assigned to provide RTP Timestamp for Clock Recovery
 - Sequence Number
 - Selectable between Control Word or RTP Sequence Number
 - Used to initiate conditioning data when packets are missing
 - Optional re-ordering of mis-ordered packets up to the Size of the Jitter Buffer depth
 - Up to 32 UDP-Specific (Out-band VCCV) OAM PW-IDs
 - Debug settings to forward PW/Bundles with special conditions to CPU for analysis (e.g. wrong IP DA)
- TXP PW/Bundle Header
 - Store up to 256 CPU generated PW/Bundle Headers (one per PW/Bundle)
 - Maximum 122 byte header with any CPU-specified content (Layer 2/3/4 content)
 - Auto generate and insert Length and FCS functions for IP and UDP Headers
 - Optional RTP Timestamp Insertion
 - Any number of TXP PW/Bundles can be assigned to include Timestamp in RTP Header
 - Optional RTP and Control Word Sequence Number Insertion
 - 3 HDLC Sequence Number generation modes
 - Sequence Numbers with “fixed at zero” value
 - Sequence Numbers with incremented counting using “skip zero at Rollover”
 - Sequence Numbers with incremented counting using “include zero at Rollover”
- PW/Bundle Payload Types
 - TDMoP PW/Bundles (non-HDLC) - Constant Bit Rate Services (e.g. PCM voice)
 - Unstructured PW Payload (without framing; SAToP): E1, T1 and slower TDM bit rate (≤ 2.048 Mb/s)
 - Structured PW Payload (with framing; CESoPSN)
 - E1, T1-SF and T1-ESF formats

ABRIDGED DATA SHEET

www.DataSheet4U.com

- Any Nx64 Kb/s bit rate from a single T1 or E1 TDM Port
 - With or without CAS Signaling
- HDLC PW/Bundles (e.g. SS7 Signaling)
 - Unstructured PW Payload: E1, T1 and slower TDM bit rate (≤ 2.048 Mb/s)
 - Structured PW Payload: Any Nx64 Kb/s bit rate from a single T1 or E1 TDM Port (for 8-bit HDLC)
- CES/SAT Processing
 - 256 CES/SAT Engines (one per PW/Bundle)
 - Per PW/Bundle Settings
 - Any Payload Size (up to maximum 2000 byte Ethernet Packet length)
 - Optional “zero” payload size for PW/Bundles that are only used for Clock Recovery
 - RXP Jitter Buffer (to compensate for PDV and for packet re-ordering; up to 500 ms)
 - Programmable “Begin Play-out Watermark” (for PDVT)
 - TXP high or low priority queue scheduling
- HDLC Processing
 - 256 HDLC Engines (one per PW/Bundle)
 - Configurable Transmit TDM Port minimum number of Intra-frame Flags (1 to 8)
 - Per Engine Settings
 - 2-bit, 7-bit or 8-bit HDLC coding
 - 16-bit, 32-bit or “no” Trailing HDLC FCS
 - Intra-frame Flag Value (0xFF or 0x7E)
 - HDLC Transmission Bit Order using MSB first or LSB first

CPU Interface Features

- CPU Packet Interface (for CPU-based OAM and Signaling)
 - Stores up to 512 Transmit and 512 Receive Packets that can be 64 byte to 2000 byte in length
 - RXP direction
 - Provides detected packet type with each received RXP CPU packet
 - In-band VCCV OAM
 - UDP-specific (Out-band VCCV) OAM
 - MEF OAM Ethernet Type
 - Configured “CPU Ethernet Type”
 - ARP
 - Broadcast Ethernet DA
 - Several Packet Header Conditions (e.g. NDP/IPv6 & unknown IP DA)
 - Provides Local Timestamp indicating the time the packet was received (in 1 us or 100 us units)
 - TXP direction
 - Any CPU generated Header and Payload (any Layer 2/3/4 content)
 - Support for IP FCS and UDP FCS Generation
 - Optionally inserts TXP OAM Timestamps (in 1 us or 100 us units)
- DS34S132 Control Interface
 - MPC8xx or MPC83xx synchronous interface using a 50 to 80 MHz clock rate (the MPC8xx and MPC83xx are processor product families of Freescale Semiconductor, Inc.)
 - Selectable 16-bit or 32-bit data bus
 - DS34S132 device Control & Sense Registers
 - Mask-able Interrupt Hierarchy for Change of Status, Alarms and Events
 - Ethernet Port RMON Statistics

Miscellaneous

- Loopbacks
 - PW/Bundle Loopback (payload from RXP PW packets are transmitted in TXP PW packets)
 - TDM Port Line Loopback (all data from Receive TDM Port sent to Transmit TDM Port using RCLK)

ABRIDGED DATA SHEET

Maxim Integrated Products Confidential and Proprietary

DS34S132 DATA SHEET

www.DataSheet4U.com

- TDM Port Timeslot Loopback (from Receive to Transmit TDM Port Timeslot using RCLK)
- TDM Port and/or Ethernet Port BERT Testing
 - Half Channel (one-way) or Full Channel (round-trip) Testing
 - Flexible PRBS, QRBS or Fixed Pattern Testing
- 16-bit DDR SDRAM Interface that does not require any glue-logic
- IEEE 1149.1 JTAG support
- MBIST (memory built-in self test)
- 1.8V Core, 2.5V DDR SDRAM and 3.3V I/O that are 5V tolerant
- 27 x 27 mm, 676-pin BGA package (1mm pitch)

8 PIN DESCRIPTIONS

8.1 Short Pin Descriptions

Table 8-1. DS34S132 Short Pin Descriptions

Name	Type	Function
TDM Port n = 0 through 31 Ports		
TCLKOn	Oz	Transmit TDM Clock Output
TSYNcn	IO	Transmit Frame (Frame or Multi-frame Sync Pulse)
TDATn	Oz	Transmit NRZ Data
TSIGn	Oz	Transmit Signaling
RCLKn	I	Receive Clock Input
RSYNcn	IO	Receive Frame (Frame or Multi-frame Sync Pulse)
RDATn	I	Receive NRZ Data
RSIGn	I	Receive Signaling
100/1000 Mbps Ethernet MAC Interface (GMII/MII)		
TXCLK	Ipu	MII Transmit clock (25 MHz)
GTCLK	Oz	GMII Transmit clock (125 MHz)
TXD[7:0]	Oz	GMII/MII Transmit data
TXEN	Oz	GMII/MII Transmit data enable
TXER	Oz	GMII/MII Transmit packet frame invalid
RXCLK	Ipu	GMII/MII Receive clock (25 MHz or 125 MHz)
RXD[7:0]	I	GMII/MII Receive data
RXDV	I	GMII/MII Receive data valid
RXER	I	GMII/MII Receive error
COL	I	MII Collision Detection (not used)
CRS	I	Carrier Sense Detection (not used)
MDC	Oz	Management Data Clock
MDIO	IO	Management Data Input/Output
CPU Interface		
PD[31:0]	IO	Data [31:0]
PA[13:1]	I	Address [13:1]
PALE	I	Address Latch Enable
PCS_N	I	Chip Select (active low)
PRW	I	Read/Write
PRWCTRL	I	Read/Write Control
PTA_N	Oz	Transfer Acknowledge (active low)
PWIDTH	I	Processor Bus Width
PINT_N	Oz	Interrupt Out (active low)
External Memory Interface – DDR SDRAM		
SDCLK, SDCLK_N	Oz	SDRAM Clock
SDCLKEN	Oz	Clock Enable
SDCS_N	Oz	Chip Select (active low)
SDRAS_N	Oz	RAS (active low)
SDCAS_N	Oz	CAS (active low)
SDWE_N	Oz	Write Enable (active low)
SDBA[1:0]	Oz	Bank Address Select
SDA[13:0]	Oz	Address
SDDQ[15:0]	IO	Bi-directional Data Bus
SDLDM	Oz	Lower Byte Data Mask
SDUDM	Oz	Upper Byte Data Mask

ABRIDGED DATA SHEET

Maxim Integrated Products Confidential and Proprietary

DS34S132 DATA SHEET

www.DataSheet4U.com

Name	Type*	Function
SDLDQS	Oz	Lower Byte Data Strobe
SDUDQS	Oz	Upper Byte Data Strobe
Clocks, Resets , JTAG & Miscellaneous		
CMNCLK	I	Optional Differential Clock Recovery Common Clock (8kHz to 25MHz)
EXTCLK[1:0]	I	2 Independent Optional External Clocks for TDM Port Transmit Timing
SYSClk	I	System Clock for CPU Interface (50 MHz to 80MHz)
LIUCLK	Oz	1.544MHz or 2.048MHz
REFCLK	I	Optional Oscillator Reference for Clock Recovery (5 MHz to 155.52 MHz)
DDRCLK	I	DDR SDRAM clock (125MHz)
ETHCLK	I	Optional Clock for GMII operation & OAM Timestamps (25MHz or 125MHz)
EXTINT	I	Ethernet Phy Interrupt (if MDIO/MDC are not used)
EPHYRST_N	Oz	Ethernet Phy Reset signal
RST_N	I	Global Reset
JTCLK	I	JTAG Clock
JTMS	Ipu	JTAG Mode Select
JTDI	Ipu	JTAG Data Input
JTDO	Oz	JTAG Data Output
JTRST_N	Ipu	JTAG Reset (active low)
HIZ_N	I	High impedance test enable (active low)
TEST_N	I	Test enable (active low)
MT[15:0]	IO	Manufacturing Test
SMTI	Ipu	Manufacturing Test Input, Must be tied to VCC33.
SMTO	O	Manufacturing Test Output, Must be left unconnected (floating).
Power Supply Signals		
VDD33	pwr	Core Digital 3.3 Volt Power Supply Input
VDD18	pwr	Core Digital 1.8 Volt Power Supply Input
VSS	pwr	Ground for 3.3V and 1.8V supplies. Connect to Common Supply Ground
AVDD	pwr	SDRAM 1.8 Volt PLL Power (may be connected CVDD)
AVSS	pwr	AVDD Ground (may be connected to CVSS)
CVDD	pwr	CLAD 1.8 Volt Power (may be connected to AVDD)
CVSS	pwr	CVDD Ground (may be connected to AVSS)
VDDP	pwr	SDRAM Digital Core 2.5 Volt Power Supply Input
VDDQ	pwr	SDRAM DQ 2.5 Volt Power Supply Input
VSSQ	pwr	SDRAM Digital Ground for VDDP and VDDQ
VREF	pwr	SDRAM SSTL_2 Reference Voltage (one-half VDDQ)

Note: * n = 0 to 31 (port number), Ipu = input with pullup, Oz = output tri-stateable, IO = Bi-directional input/output

ABRIDGED DATA SHEET

Maxim Integrated Products Confidential and Proprietary

DS34S132 DATA SHEET

www.DataSheet4U.com

16 THERMAL INFORMATION

Table 16-1. Thermal Package Information

Parameter	Value
Target Ambient Temperature Range	-40°C to +85°C
Die Junction Temperature Range	-40°C to +125°C
Theta-JA, Still Air	14.5°C/W (Note 1)
Theta-JC, Still Air	3.9°C/W
Psi Jt (Junction to Top of Case)	0.23°C/W

Note 1: Theta-JA is based on the package mounted on a four-layer JEDEC board and measured in a JEDEC test chamber.

ABRIDGED DATA SHEET

Maxim Integrated Products Confidential and Proprietary

DS34S132 DATA SHEET

www.DataSheet4U.com

17 DATA SHEET REVISION HISTORY

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	7/09	Initial release.	—

19-4750; Rev 0; 7/09

194 of 194

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600

© 2009 Maxim Integrated Products

Maxim is a registered trademark of Maxim Integrated Products.

www.DataSheet4U.com