


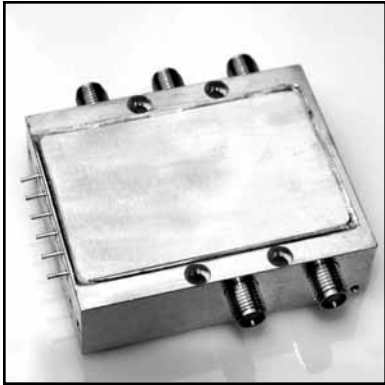

MODEL NUMBER DSW26176



Diode SP2T

FEATURES


- 500-2500 MHz
- High Isolation
- 60 dB Isolation
- Low Insertion Loss, 1.20 dB

SP2T

www.DataSheet4U.com

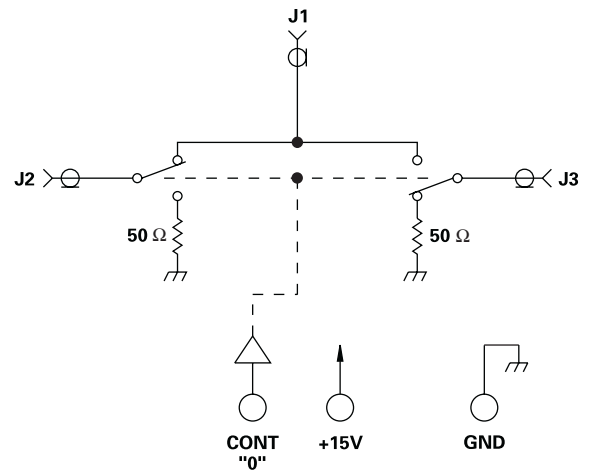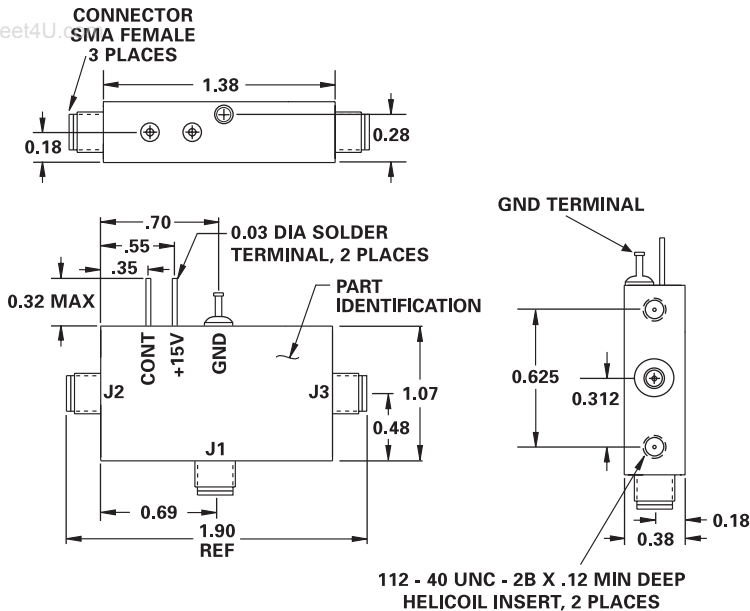

GUARANTEED PERFORMANCE

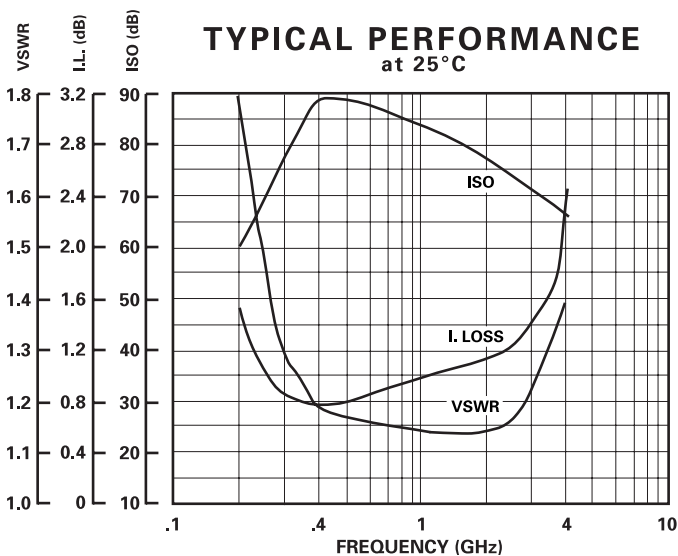

Parameter	Min	Typ	Max	Units	Conditions
Operating Frequency	500		2500	MHz	
DC Current		39	50	mA	At +5 VDC Supply
Control Type		TTL			1 Line, J1 - J2 = Logic "0"
Control Current	High	± 1.0	20	μ A	$V_{IH} = +2.7V$
	Low	± 1.0	-400	μ A	$V_{IL} = +0.5V$
Isolation	60	75		dB	
Insertion Loss		1.20	1.5	dB	
Amplitude Balance		± 0.01	± 0.3	dB	Reference Between the Calibration Port and any Input Port of the Switch
Phase Tracking		± 0.25	2	DEG	Port to Port (Max Differential)
VSWR	Thru Termination	1.20/1.15/1	1.4/1.5/1		
Impedance		50		OHMS	
Switching Speed		8.4	10	μ SEC	50% TTL to 90% / 10% RF
Transition (Rise/Fall) Time		5.8	10	μ SEC	10% / 90% or 90% / 10% RF
Switching (Video) Transients		20	200	mV	Peak to Peak Value
Intercept Points	2nd	+69	+71	dBm	900.3 MHz / 400.3 MHz
	3rd	+37	+39	dBm	450.15 MHz / 400.3 MHz
RF Power	Operate	+23	+20	dBm	0.1 dB Compression
	No Damage		+30	dBm	
Operating Temperature	-55	+25	+125	°C	TA



DAICO Industries

310.507.3242 • FAX 310.507.5701 • www.daico.com
www.DataSheet4U.com