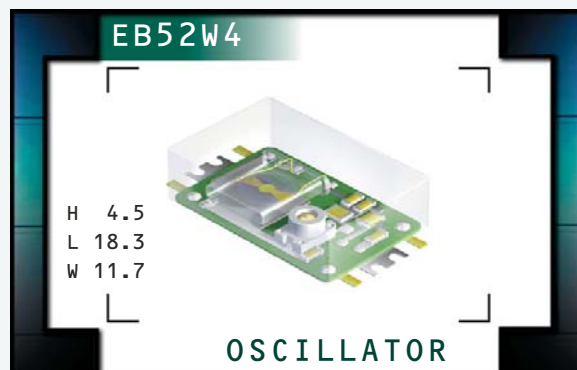




EB52W4 Series

- Temperature Compensated Crystal Oscillator (TCXO)
- HCMOS Output
- 3.3V Supply Voltage
- SMD package
- Stability to 1.5ppm
- External voltage control option available
- Internal Mechanical Trim (Top of Can)



NOTES

TABLE 1: PART NUMBERING CODES

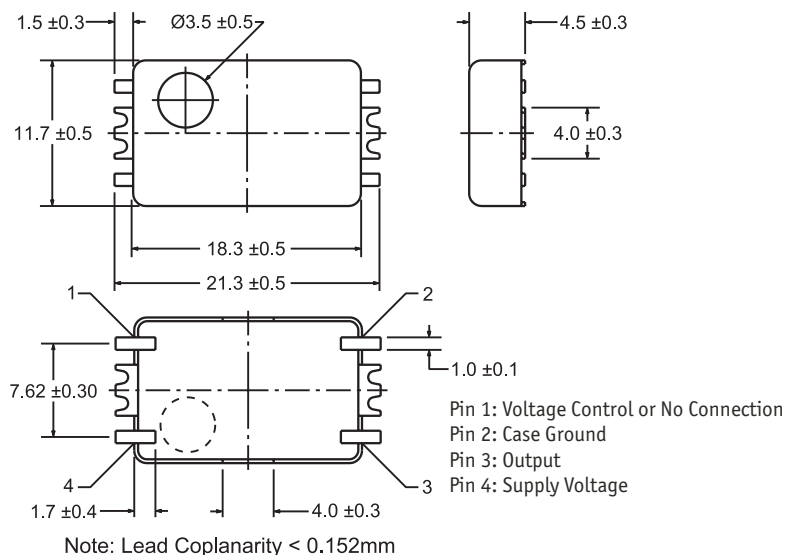
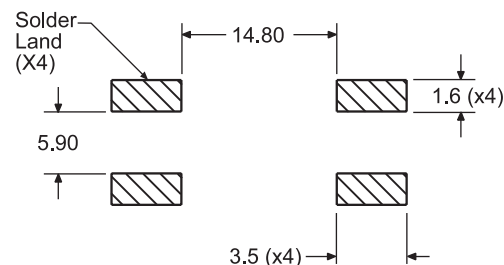
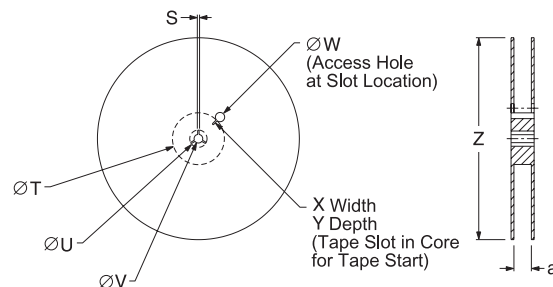
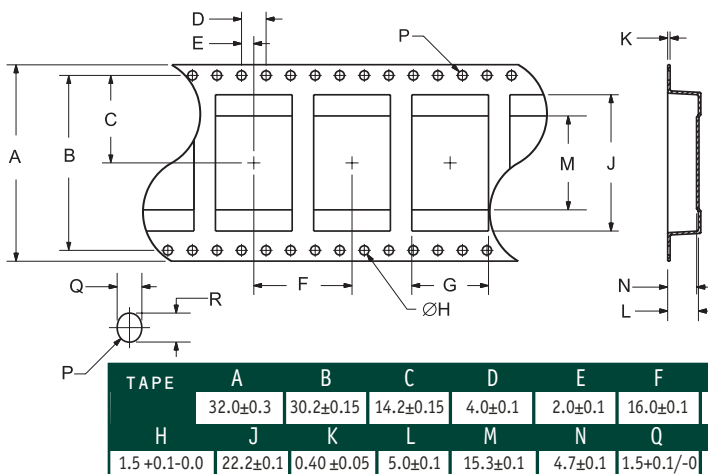
Operating Temperature Range	Code	Frequency Stability			
		X = Available from 1,200MHz to 27,000MHz Y = Available at any Frequency			
		±1.5ppm	±2.0ppm	±3.0ppm	±5.0ppm
0°C to +50°C	A	Y	Y	Y	Y
0°C to +70°C	B	X	Y	Y	Y
-20°C to +70°C	C		X	Y	Y
-30°C to +70°C	D			Y	Y
-40°C to +85°C	E				Y

ELECTRICAL SPECIFICATIONS

Frequency Range		1.200MHz to 40.000MHz
Operating Temperature Range		See Table 1
Storage Temperature Range		-40°C to 85°C
Supply Voltage (V_{DD})		3.3V _{DC} ±5%
Load Drive Capability		15pF HCMOS Load Maximum
Internal Trim (Top of Can)		±3ppm Minimum
Control Voltage (External)		1.65V _{DC} ±1.35V _{DC} , Positive Transfer Characteristic
Frequency Deviation	at $V_C = 1.65V_{DC} \pm 1.35V_{DC}$, $V_{DD} = 3.3V_{DC}$	±7ppm Minimum, ±20ppm Maximum
Input Current	≤ 27.000MHz	20mA Maximum
	> 27.000MHz	35mA Maximum
Aging (at 25°C)		±1ppm / year Maximum
Frequency Stability	vs. Operating Temperature Range	See Table 1
	vs. Input Voltage (±5%)	±0.3ppm Maximum
	vs. Load (±2pF)	±0.2ppm Maximum
Output Voltage Logic High (V_{OH})		90% of V_{DD} Minimum
Output Voltage Logic Low (V_{OL})		10% of V_{DD} Maximum
Rise Time / Fall Time		over 20% to 80% of Waveform 10 nSeconds Maximum
Duty Cycle		at 50% of Waveform 50 ±10(%)
Typical Phase Noise		Fo = 19.200MHz, at 25°C, at Nominal V_{DC} and V_C
		at 10Hz Offset
		at 100Hz Offset
		at 1kHz Offset
		at 10kHz Offset
		at 100kHz Offset
Modulation Bandwidth		at -3dB with $V_C = 1.65V_{DC}$ 10kHz Minimum
Input Impedance		10kOhms Typical

MANUFACTURER
ECLIPTEK CORP.CATEGORY
OSCILLATORSERIES
EB52W4PACKAGE
Metal SMDVOLTAGE
3.3VCLASS
OS1HREV. DATE
01/05

PART NUMBERING GUIDE

EB52W4 E 25 V - 12.800M**OPERATING TEMP. RANGE**
One Letter Code Per Table 1**FREQUENCY STABILITY**
Two Digit Code Per Table 1**FREQUENCY****EXTERNAL TRIM**N=None (No Connection on Pin 1)
V=External Control Voltage**MECHANICAL DIMENSIONS**
ALL DIMENSIONS IN MILLIMETERS**SUGGESTED SOLDER PAD LAYOUT**
ALL DIMENSIONS IN MILLIMETERSTolerances = ± 0.1 **TAPE AND REEL DIMENSIONS**
ALL DIMENSIONS IN MILLIMETERS**ENVIRONMENTAL/MECHANICAL SPECIFICATIONS**CharacteristicSpecification

Fine Leak Test
Gross Leak Test
Mechanical Shock
Vibration
Solderability
Temperature Cycling
Resistance to Soldering Heat
Resistance to Solvents

MIL-STD-883, Method 1014, Condition A
MIL-STD-883, Method 1014, Condition C
MIL-STD-202, Method 213, Condition C
MIL-STD-883, Method 2007, Condition A
MIL-STD-883, Method 2002
MIL-STD-883, Method 1010
MIL-STD-202, Method 210
MIL-STD-202, Method 215

MARKING SPECIFICATIONS

Line 1: ECLIPTEK

Line 3: XX.XXX M

Frequency in MHz (5 Digits Maximum + Decimal)

Line 4: XX Y ZZ

Week of Year

Last Digit of Year

Eclipse Manufacturing Identifier

MANUFACTURER
ECLIPTEK CORP.CATEGORY
OSCILLATORSERIES
EB52W4PACKAGE
Metal SMDVOLTAGE
3.3VCLASS
OS1HREV. DATE
01/05