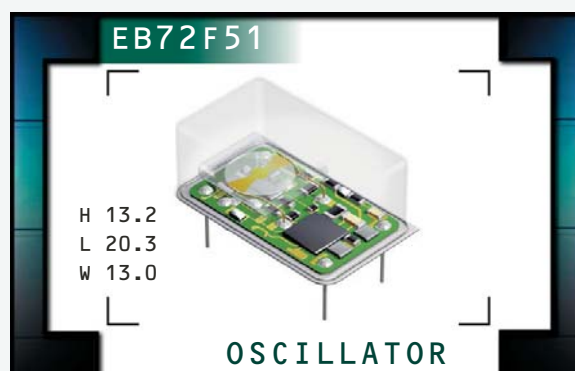


EB72F51 Series

- Oven Controlled Crystal Oscillator (OCXO)
- AT-Cut
- HCMOS output
- 3.3V supply voltage
- 14 pin DIP package
- External control voltage option available
- Stability to ± 200 ppb
- Custom lead length, gull wing options available



ELECTRICAL SPECIFICATIONS

Frequency Range	10.000MHz, 12.288MHz, 12.800MHz, 16.000MHz, 19.440MHz, or 20.000MHz	
Operating Temperature Range (OTR)	0°C to 50°C, 0°C to 70°C, or -20°C to 70°C	
Storage Temperature Range	-55°C to 125°C	
Supply Voltage (V_{DD})	3.3V _{DC} $\pm 5\%$	
Frequency Tolerance / Stability		
vs. Initial Tolerance	at Nominal V_{DD} and V_C , at 25°C	± 1.0 ppm or ± 500 ppb Maximum
vs. Temperature Stability	at Nominal V_{DD} and V_C	± 200 ppb, ± 280 ppb, or ± 500 ppb Maximum
vs. Vdd	$V_{DD} \pm 5\%$	± 50 ppb Maximum
vs. Load	$V_{load} \pm 5\%$	± 50 ppb Maximum
vs. Aging (1 Day)	after 72 Hours of Operation	± 30 ppb Maximum
vs. Aging (1 Year)	after 72 Hours of Operation	± 500 ppb Maximum
vs. Aging (10 Years)	after 72 Hours of Operation	± 3.0 ppm Maximum
Crystal Cut	AT-Cut	
Warm Up Time	to ± 500 ppb of Final Frequency at 1 Hour at 25°C	3 Minutes Maximum
Power Consumption	at Steady State, at 25°C	1.6 Watts Maximum
	During Warm Up, at 25°C	2.5 Watts Maximum
Output Voltage Logic High (V_{OH})	$I_{OH} = -4$ mA	$2.6V_{DC}$ Minimum
Output Voltage Logic Low (V_{OL})	$I_{OL} = +4$ mA	$0.4V_{DC}$ Maximum
Rise Time / Fall Time	Measured at 20% to 80% of Waveform	6nSec Maximum
Duty Cycle	Measured at 50% of Waveform	50 ± 5 (%)
Load Drive Capability	15pF HCMOS Load	
Frequency Deviation	Referenced to F_0 at $V_C = 1.65V_{DC}$; $V_{DD} = 3.3V_{DC}$ over OTR	± 5 ppm Minimum
Control Voltage Range	$0.0V_{DC}$ to V_{DD}	
Control Voltage (V_C)	$1.65V_{DC} \pm 1.65V_{DC}$	
Transfer Function	Positive Transfer Characteristic	
Linearity	$\pm 10\%$ Maximum	
Input Impedance	10kOhms Typical	
Typical Phase Noise (at 12.800MHz)	at 10Hz Offset	-95dBc/Hz
	at 100Hz Offset	-120dBc/Hz
	at 1kHz Offset	-135dBc/Hz
	at 10kHz Offset	-140dBc/Hz

MANUFACTURER ECLIPTEK CORP.	CATEGORY OSCILLATOR	SERIES EB72F51	PACKAGE 14 pin DIP	VOLTAGE 3.3V	CLASS OS2A	REV. DATE 05/07
--------------------------------	------------------------	-------------------	-----------------------	-----------------	---------------	--------------------

PART NUMBERING GUIDE

EB72F51 C 10 B V 2 - 20.000M - CL125**INITIAL TOLERANCE**C=±1.0ppm
D=±500ppb**FREQUENCY STABILITY**

2 Digit Code Per Table 1

OPERATING TEMPERATURE RANGE (OTR)



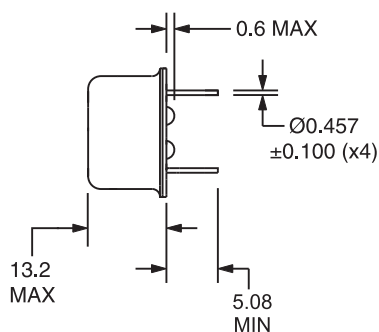
1 Letter Code Per Table 1

AVAILABLE OPTIONSBlank=None (Standard)
CLXXX=Custom Lead Length
G=Full Size Gull Wing**FREQUENCY****DUTY CYCLE**

2=50% ±5%

VOLTAGE CONTROL OPTIONN=None (No Connect on Pin 1)
V=Voltage Control on Pin 1**TABLE 1: PART NUMBERING CODES**

Operating Temperature Range	Code	Frequency Stability X Denotes Availability		
		±200ppb	±280ppb	±500ppb
		20	28	50
0°C to +50°C	A	X	X	X
0°C to +70°C	B		X	X
-20°C to +70°C	C			X

MECHANICAL DIMENSIONS
ALL DIMENSIONS IN MILLIMETERSPin 1: No Connect or Voltage Control
Pin 7: Case Ground
Pin 8: Output
Pin 14: Supply Voltage**ENVIRONMENTAL/MECHANICAL SPECIFICATIONS**CharacteristicSpecification

Gross Leak Test	MIL-STD-883, Method 1014, Condition C
Mechanical Shock	MIL-STD-202, Method 213, Condition C
Vibration	MIL-STD-883, Method 2007, Condition A
Lead Integrity	MIL-STD-883, Method 2004
Solderability	MIL-STD-883, Method 2002
Temperature Cycling	MIL-STD-883, Method 1010
Resistance to Soldering Heat	MIL-STD-883, Method 210
Resistance to Solvents	MIL-STD-883, Method 215

MARKING SPECIFICATIONS

Line 1: ECLIPTEK

Line 2: XX.XXX M

Frequency in MHz
(5 Digits Maximum + Decimal)

Line 3: XX Y ZZ

Week of Year
Last Digit of Year
Ecliptek Manufacturing Identifier

Note: Pin 1 shall be designated with a dot

MANUFACTURER
ECLIPTEK CORP.CATEGORY
OSCILLATORSERIES
EB72F51PACKAGE
14 pin DIPVOLTAGE
3.3VCLASS
OS2AREV. DATE
05/07