

EL - 314

The EL - 314 a high - power GaAs IRED mounted in a clear sidelooking package, is compact, low profile, and easy to mount.

FEATURES


- Compact
- Low profile package
- Low - cost
- Sidelooking plastic package

APPLICATIONS

- Photointerrupters
- Optical switches
- Toys

DIMENSIONS

(Unit : mm)

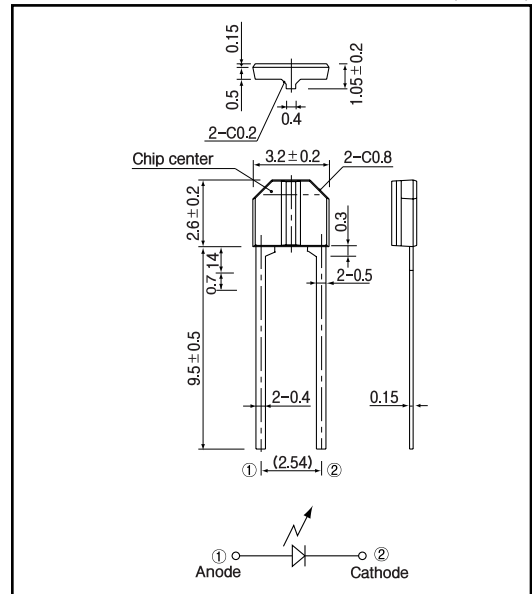

MAXIMUM RATINGS

(Ta=25 °C)

Item	Symbol	Rating	Unit
Reverse voltage	V_R	5	V
Forward current	I_F	50	mA
Pulse forward current ^{*1}	I_{FP}	0.5	A
Power dissipation	P_D	75	mW
Operating temp.	$T_{opr.}$	- 25 ~ +85	
Storage temp.	$T_{stg.}$	- 30 ~ +100	
Soldering temp. ^{*2}	$T_{sol.}$	240	

*1. pulse width : t_w 100 μ sec, period : T = 10msec.

*2. For MAX.5 seconds at the position of 2 mm from the package

ELECTRO-OPTICAL CHARACTERISTICS


(Ta=25 °C)

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Forward voltage	V_F	I_F = 50mA			1.6	V
Reverse current	I_R	V_R = 5V			10	μ A
Capacitance	C_t	f = 1MHz		25		pF
Radiant intensity	P_o	I_F = 50mA		0.7		mW/sr
Peak emission wavelength	λ_p	I_F = 50mA		940		nm
Spectral bandwidth 50%	$\Delta \lambda$	I_F = 50mA		50		nm
Half angle	θ			± 30		deg.


Infrared Emitting Diodes(GaAs)

EL - 314


Power dissipation Vs. Ambient temperature

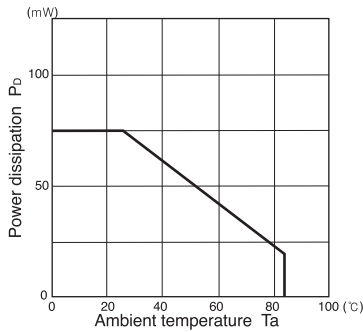


Radiant intensity Vs. Forward current

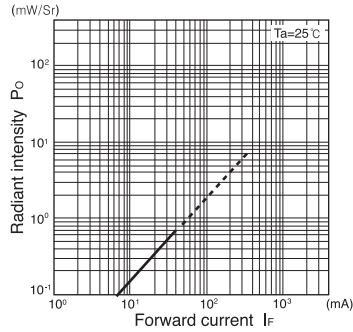


Relative radiant intensity Vs. Ambient temperature




Relative intensity Vs. Wavelength

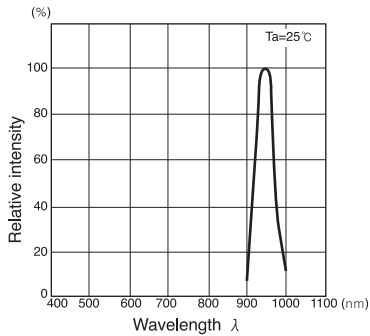

Forward current vs. Forward voltage



Radiant Pattern

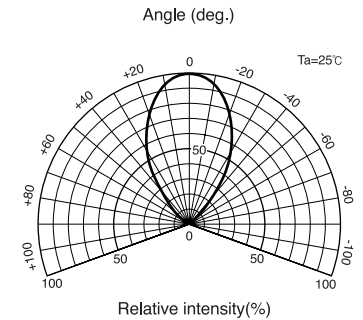

Relative radiant intensity Vs. Distance

