

Single N-channel MOSFET

ELM4N0006FUA-S

<https://www.elm-tech.com>

■General description

ELM4N0006FUA-S uses advanced trench technology to provide excellent $R_{ds(on)}$, low gate charge and low gate threshold voltage.

■Features

- $V_{ds}=100V$
- $I_d=3A$ ($V_{gs}=10V$)
- $R_{ds(on)} = 75m\Omega$ ($V_{gs}=10V$)
- $R_{ds(on)} = 82m\Omega$ ($V_{gs}=4.5V$)

■Maximum absolute ratings


Parameter		Symbol	Limit	Unit	Note
Drain-source voltage		V_{ds}	100	V	
Gate-source voltage		V_{gs}	± 20	V	
Continuous drain current ($V_{gs}=10V$)	$T_a=25^{\circ}C$	I_d	3.0	A	1
	$T_a=70^{\circ}C$		2.4		
Pulsed drain current		I_{dm}	15	A	2
Total power dissipation	$T_a=25^{\circ}C$	P_d	2	W	3
Storage temperature range		T_{stg}	-55 to 150	$^{\circ}C$	
Operating junction temperature range		T_j	-55 to 150	$^{\circ}C$	

■Thermal characteristics

Parameter	Symbol	Typ.	Max.	Unit	Note
Thermal resistance junction-ambient	$R_{\theta ja}$	-	85	$^{\circ}C/W$	1
Thermal resistance junction-case	$R_{\theta jc}$	-	24	$^{\circ}C/W$	1


■Pin configuration

SOT-223(TOP VIEW)



Pin No.	Pin name
1	GATE
2	DRAIN
3	SOURCE

■Circuit



Single N-channel MOSFET

ELM4N0006FUA-S

<https://www.elm-tech.com>

■Electrical characteristics

T_j=25°C. Unless otherwise noted.

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Note
STATIC PARAMETERS							
Drain-source breakdown voltage	BV _{dss}	V _{gs} =0V, I _d =250μA	100	-	-	V	
BV _{dss} Temperature coefficient	$\frac{\Delta BV_{dss}}{\Delta T_j}$	Reference to 25°C, I _d =1mA	-	0.082	-	V/°C	
Static drain-source on-resistance	R _{ds(on)}	V _{gs} =10V, I _d =3A	-	60	75	mΩ	2
		V _{gs} =4.5V, I _d =2A	-	65	82		
Gate threshold voltage	V _{gs(th)}	V _{gs} =V _{ds} , I _d =250μA	1.2	1.6	2.5	V	
V _{gs(th)} Temperature coefficient	ΔV _{gs(th)}		-	-4.8	-	mV/°C	
Drain-source leakage current	I _{dss}	V _{ds} =80V, V _{gs} =0V	-	-	1	μA	
		V _{ds} =80V, V _{gs} =0V, T _j =55°C	-	-	5		
Gate-source leakage current	I _{gss}	V _{gs} =±20V, V _{ds} =0V	-	-	±100	nA	
Forward transconductance	G _{fs}	V _{ds} =5V, I _d =3A	-	5.8	-	S	
Continuous source current	I _s	V _{gs} =V _{ds} =0V, Force current	-	-	3	A	1, 4
Pulsed source current	I _{sm}		-	-	15	A	2, 4
Diode forward voltage	V _{sd}	V _{gs} =0V, I _s =1A	-	-	1.2	V	2
DYNAMIC PARAMETERS							
Input capacitance	C _{iss}	V _{ds} =15V, V _{gs} =0V, f=1MHz	-	2400	3360	pF	
Output capacitance	C _{oss}		-	100	140	pF	
Reverse transfer capacitance	C _{rss}		-	82	115	pF	
Gate resistance	R _g	V _{ds} =0V, V _{gs} =0V, f=1MHz	-	1.4	2.8	Ω	
SWITCHING PARAMETERS							
Total gate charge (10V)	Q _g	V _{ds} =80V, V _{gs} =10V, I _d =3A	-	40.0	56.0	nC	
Gate-source charge	Q _{gs}		-	7.3	10.2	nC	
Gate-drain charge	Q _{gd}		-	7.0	9.8	nC	
Turn-on delay time	t _{d(on)}	V _{dd} =50V, V _{gs} =10V R _{gen} =3.3Ω, I _d =3A	-	9.2	18.4	ns	
Turn-on rise time	t _r		-	22.0	40.0	ns	
Turn-off delay time	t _{d(off)}		-	41.0	82.0	ns	
Turn-off fall time	t _f		-	19.6	39.0	ns	
Reverse recovery time	t _{rr}	I _f =3A, di/dt=100A/μs	-	41	-	nS	
Reverse recovery charge	Q _{rr}		-	25	-	nC	

NOTE :







1. The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
2. The data tested by pulsed, pulse width ≤ 300μs and duty cycle ≤ 2%.
3. The power dissipation is limited by 150°C junction temperature.
4. The data is theoretically the same as I_d and I_{dm}, in real applications, should be limited by total power dissipation.

Single N-channel MOSFET

ELM4N0006FUA-S

<https://www.elm-tech.com>

■ Typical characteristics

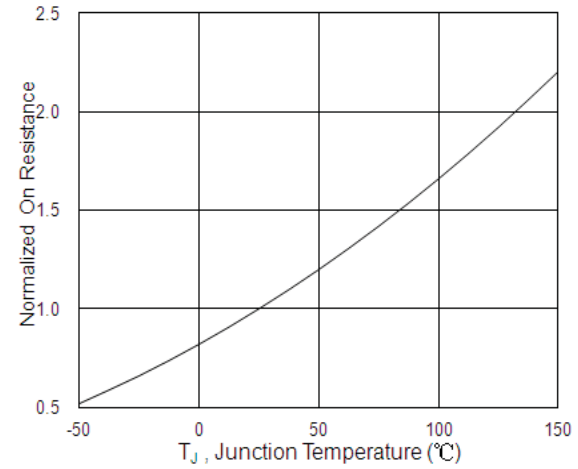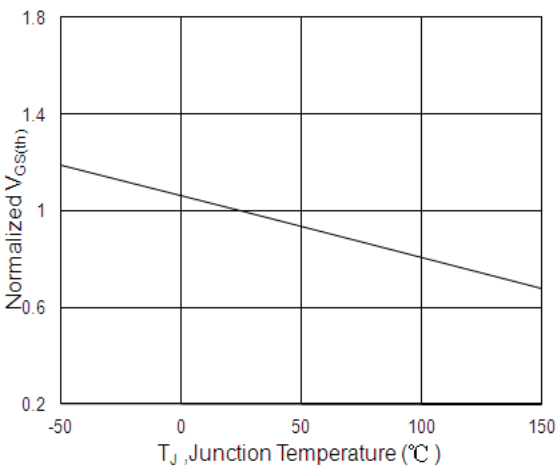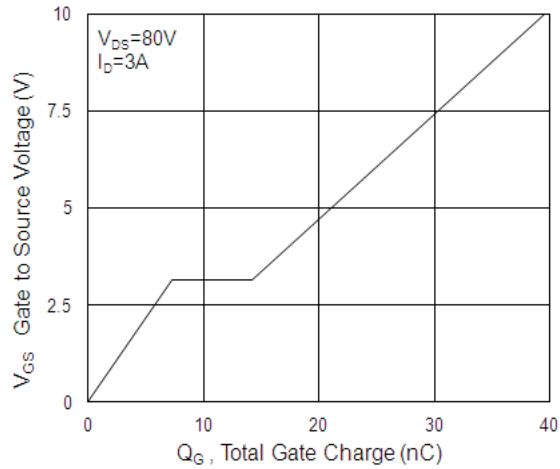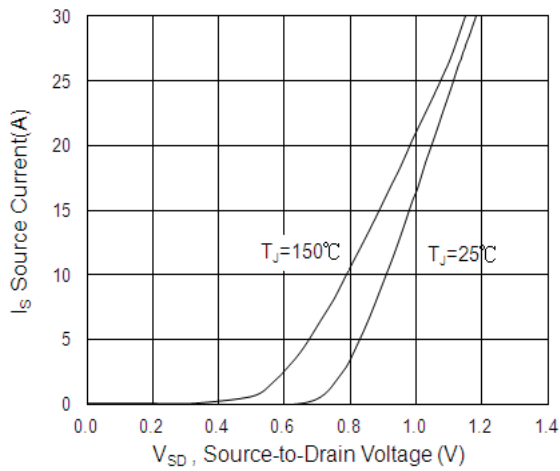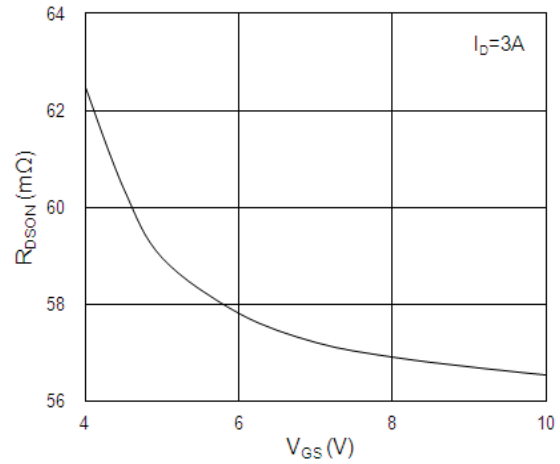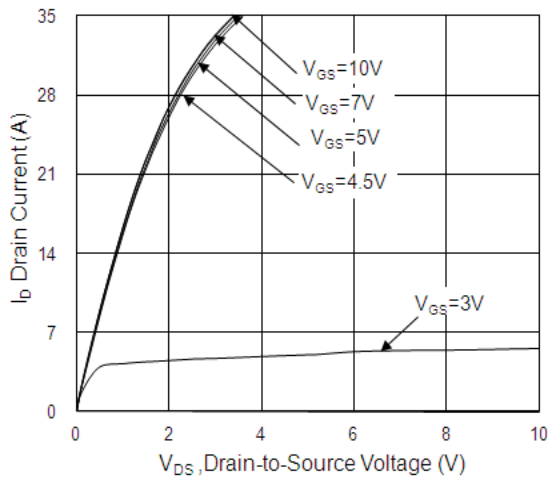

Single N-channel MOSFET

ELM4N0006FUA-S

<https://www.elm-tech.com>

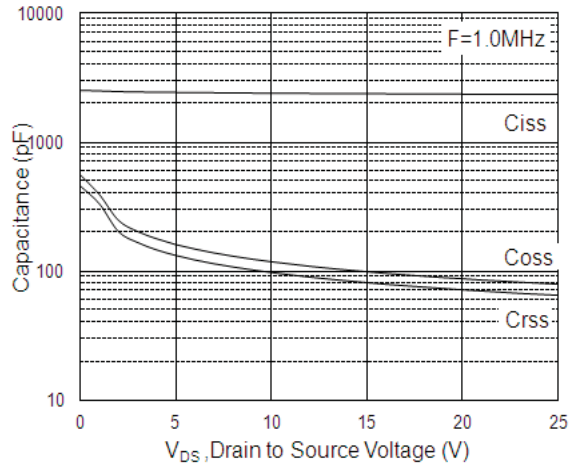


Fig.7 Capacitance

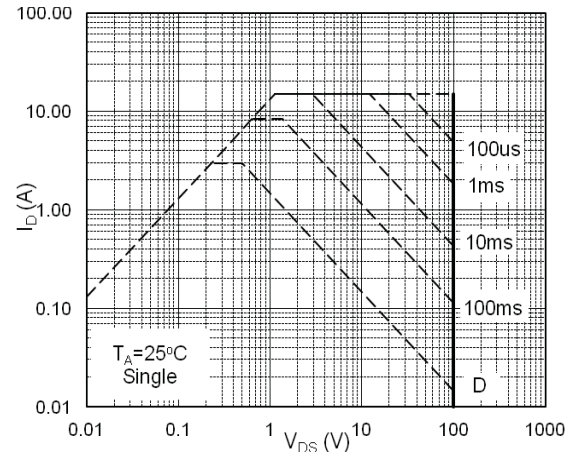


Fig.8 Safe Operating Area

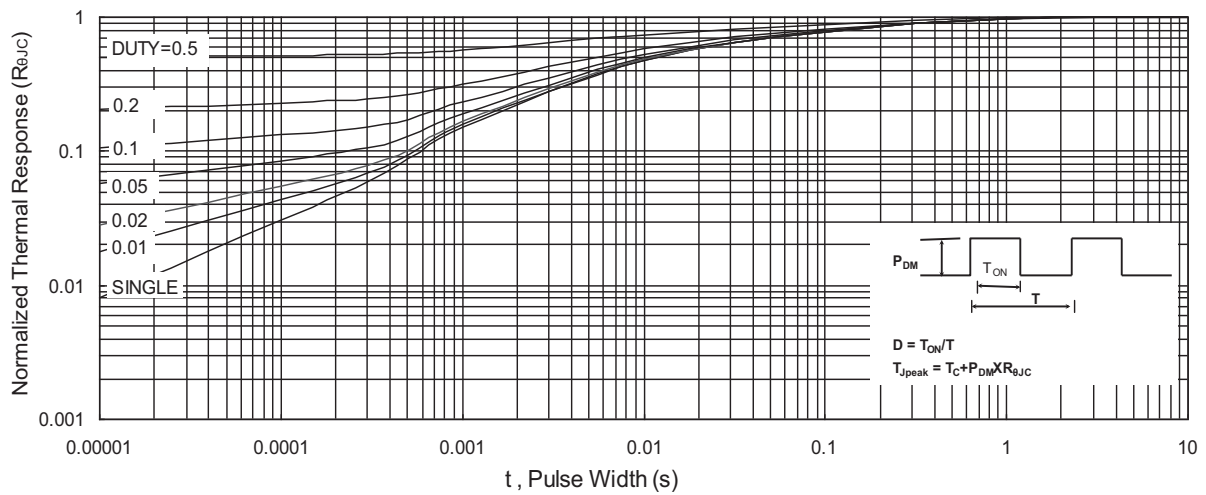


Fig.9 Normalized Maximum Transient Thermal Impedance

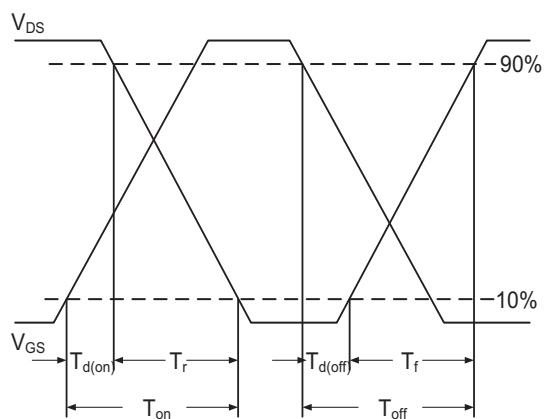


Fig.10 Switching Time Waveform

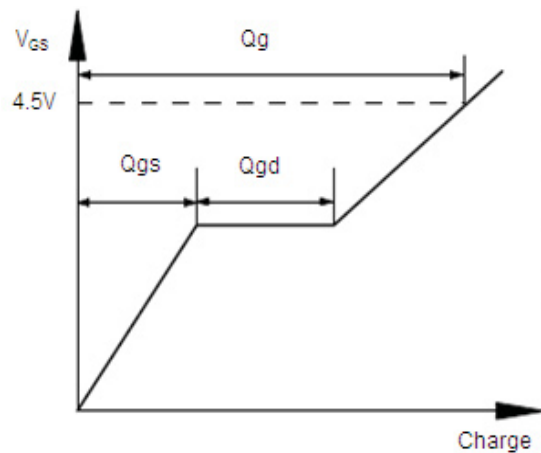



Fig.11 Gate Charge Waveform

Single N-channel MOSFET

ELM4N0006FUA-S


<https://www.elm-tech.com>

■SOT-223 dimension (3,000pcs/reel)

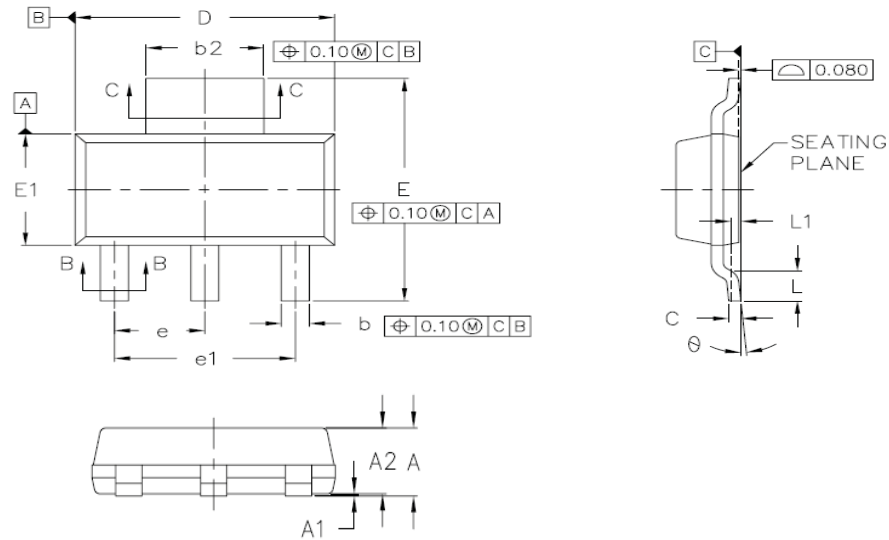

Symbols	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	--	1.80	--	0.071
A1	0.02	0.10	0.001	0.004
A2	1.50	1.70	0.059	0.067
b	0.66	0.84	0.026	0.033
b1	0.60	0.79	0.024	0.031
b2	2.90	3.10	0.114	0.122
b3	2.84	3.05	0.112	0.120
c	0.23	0.35	0.009	0.014
c1	0.23	0.33	0.009	0.013
D	6.30	6.70	0.248	0.264
E	6.70	7.30	0.264	0.287
E1	3.30	3.70	0.130	0.146
e	2.30 BSC.		0.091 BSC.	
e1	4.60 BSC.		0.182 BSC.	
L	0.81	--	0.032	--
L1	0.25 BSC.		0.010 BSC.	
θ	0°	10°	0°	10°

■Marking



Symbols	Content
XXXXXX	Product code
a	Yearly code : 2019=K, 2020=L, 2021=M, 2022=N...
b、 c	Weekly code : 01 to 53
d、 e	Sequence : 01 to 99 or 0A to 0Z
f	Assembly code : A to Z (I, O excepted.)