

ER302D THRU ER303D

DPAK SURFACE MOUNT SUPERFAST RECTIFIER VOLTAGE - 200 to 300 Volts CURRENT - 3.0 Amperes


FEATURES

- For surface mounted applications
- Low profile package
- Built-in strain relief
- Easy pick and place
- Superfast recovery times for high efficiency
- Plastic package has Underwriters Laboratory

Flammability Classification 94V-O

- Glass passivated junction
- High temperature soldering:
260 /10 seconds at terminals

D PAK/TO-252AA

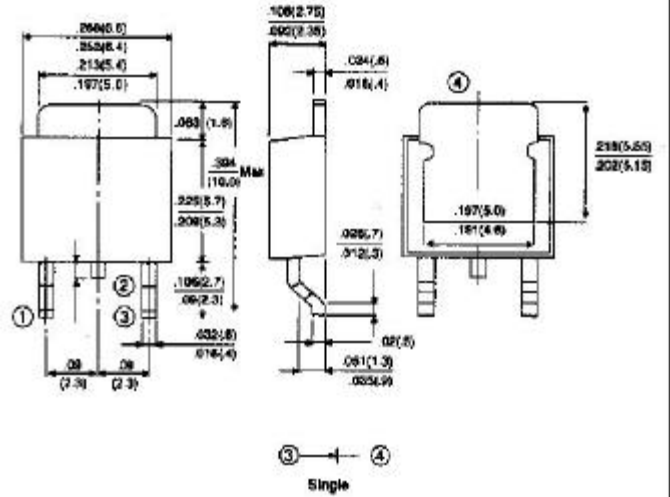

Dimensions in inches and (millimeters)

MECHANICAL DATA

Case: D PAK/TO-252AA molded plastic

Terminals: Solder plated, solderable per MIL-STD-750,

Method 2026

Polarity: Color band denotes cathode

Standard packaging: 16mm tape (EIA-481)

Weight: 0.015 ounce, 0.4 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

Resistive or inductive load.

	SYMBOLS	ER302D	ER303D	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	200	300	Volts
Maximum RMS Voltage	V _{RMS}	140	210	Volts
Maximum DC Blocking Voltage	V _{DC}	200	300	Volts
Maximum Average Forward Rectified Current, at T _C =75	I _(AV)	3.0		Amps
Peak Forward Surge Current 8.3ms single half sine-Wave superimposed on rated load(JEDEC method)	I _{FSM}	75.0		Amps
Maximum Instantaneous Forward Voltage at 3.0A (Note 1)	V _F	0.95	1.25	Volts
Maximum DC Reverse Current T _A =25	I _R	5.0		A
At Rated DC Blocking Voltage T _A =100		0.2		mA
Maximum Thermal Resistance (Note 2)	R _{JC}	6.0		/W
	R _{JA}	80.0		
Maximum Reverse Recovery	T _{RR}	35.0		nS
Storage Temperature Range	T _{STG}	-50 to +150		

NOTES:

1. Pulse Test with PW=300 sec, 2% Duty Cycle.
2. Mounted on P.C.Board with 14mm² (.013mm thick) copper pad areas.

RATING AND CHARACTERISTIC CURVES

ER302D THRU ER303D

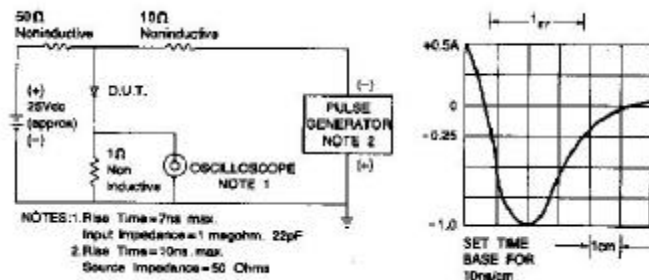


Fig. 1-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

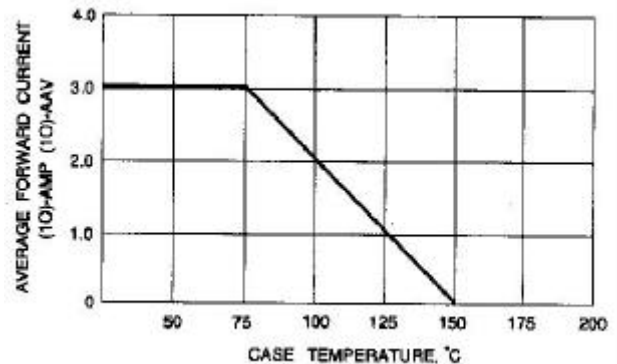


Fig. 2-MAXIMUM AVERAGE FORWARD CURRENT RATING

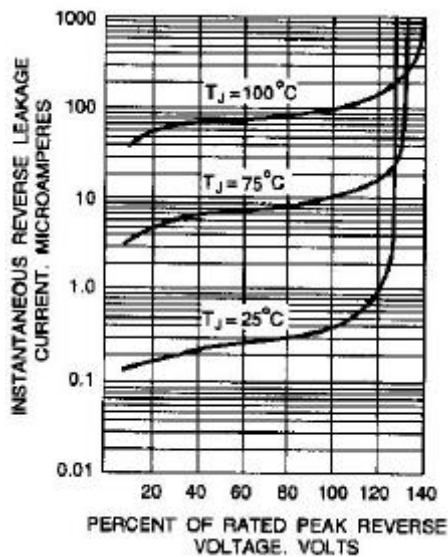


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

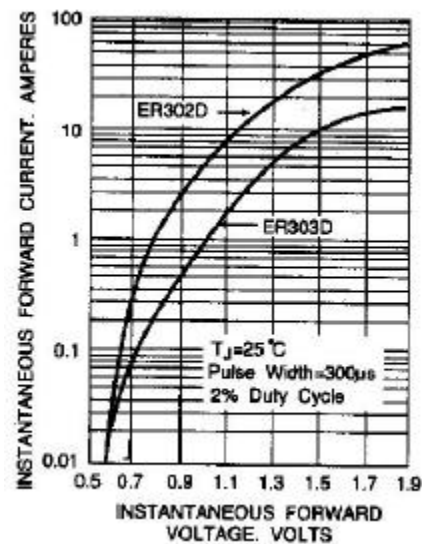


Fig. 4-TYPICAL FORWARD CAPACITANCE

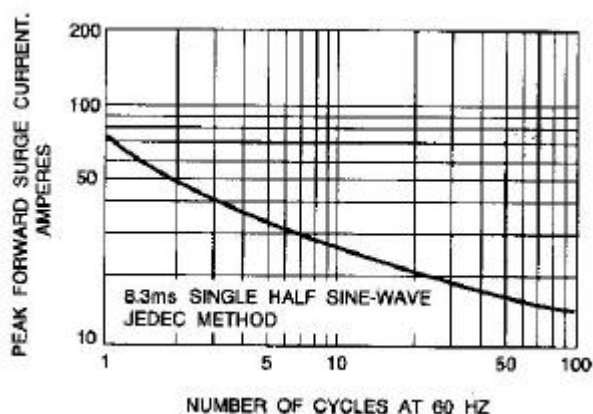


Fig. 5-MAXIMUM NON-REPETITIVE SURGE CURRENT

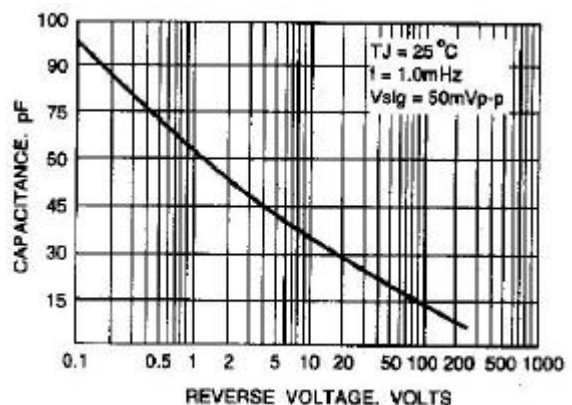


Fig. 6-TYPICAL JUNCTION CAPACITANCE