

Preliminary Product Information

ERM 7501FJ

EPITAXX*InGaAs Planar PIN Photodiode/GaAs FET
Hybrid Receiver Module***DESCRIPTION**


The ERM 7501FJ is a hybrid device containing a high speed InGaAs planar PIN photodiode and GaAs FET in a hermetically sealed package with integral fiber pigtail. It is designed for local optical communication and long haul telecommunication applications.

FEATURES


- Low dark current, high reliability InGaAs photodiode.
- High speed, low noise GaAs FET
- User selected gain/bandwidth
- Hermetically sealed fiber pigtail package
- Optional fiber types and connectorization

DIMENSIONS

ERM 7501FJ

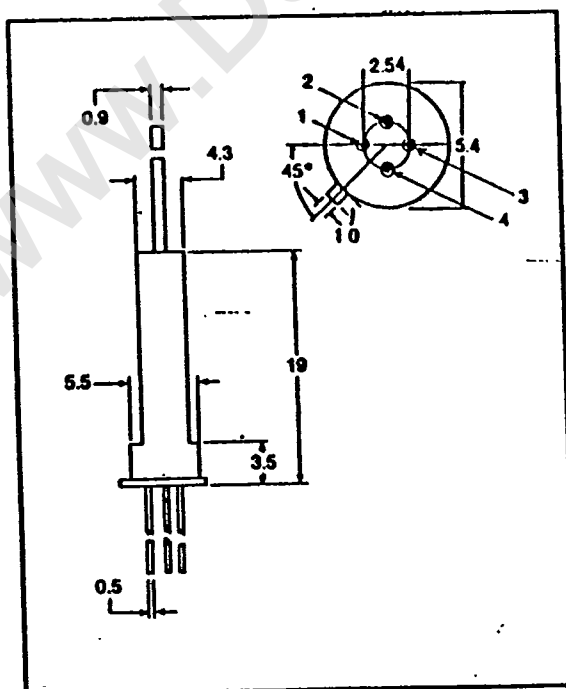

DIMENSIONS IN MM

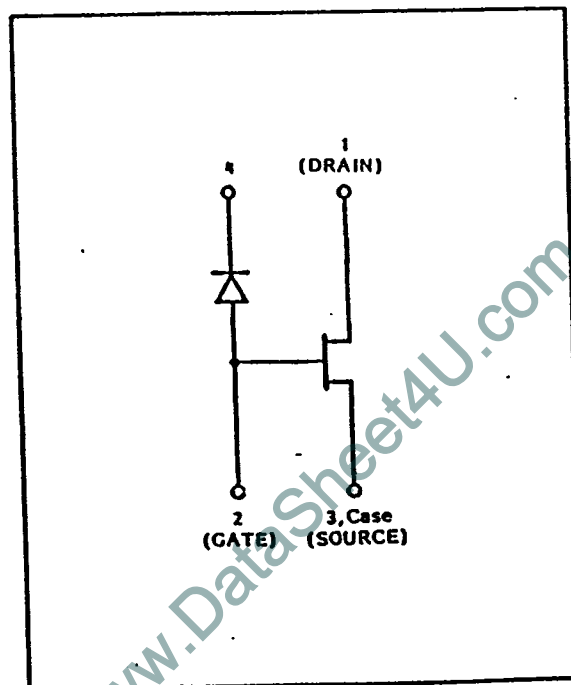

SPECIFICATIONSAt T = 25C and V_R = 5V unless otherwise indicated.

Parameter	ERM 7501FJ			Unit
	Min.	Typ.	Max.	
Detector Active Diameter		75		um
Spectral Response	0.8		1.7	um
Responsivity @ 1300nm	0.65	0.80		A/W
Dark Current		0.5	3.0	nA
Capacitance		1.5	3.0	pF
FET Transconductance V _{ds} =3V, I _{ds} =10mA	35	40		mS

MAXIMUM RATINGS

Parameter		ERM 7501FJ	Unit
PIN Photodiode	Reverse Voltage	25	V
	Reverse Current	10	mA
	Forward Current	0.5	mA
FET	Drain-Source Voltage	6	V
	Gate-Source Voltage	-5	V
	Drain Current	75	mA
	Power Dissipation	200	mW
Operating Temperature		85	C
Storage Temperature		125	C

OPTIONS

- ERM 7501FJ/FC-62.5
Multimode (62.5/125)
- ERM 7501FJ/FC-SM
Singlemode (9/125) 0/140)

- ERM 7501FC with connector

DISCLAIMER

Epitaxx, Inc., believes the information contained in this document to be accurate. However, no responsibility is assumed for its use nor for any infringement of the rights of third parties. Right to introduce changes without notice is reserved.